LOCATION				FEET OF DITCHING				MISC. ITEMS				REMARKS
								653.20	613.10	649.31	651.15	
SITE	STATION	STATION	POS.	PERCENT GRADE				TEMP. EROS. MATT.	STONE FILL TYPE I	GEOT. UNDER STONE FILL	SEED	
				0-1	1-2.5	2.5-10	>10	SY	CY	SY	LB	
VT. ROUTE 73												
ROCHESTER:												
1	0+00	2+65	RT			265			3	177		
2	20+60	21+15	LT		55			37			0.5	
3	126+70	129+35	RT			265			3	177		
4	132+00	134+65	RT			265			3	177		
5	137+30	150+50	RT			1320			193	880		
6	153+10	161+05	RT			795			116	530		
7	163+70	166+35	RT			265			3	177		
8	171+60	174+25	RT			265			3	177		
9	184+80	190+10	RT			530			78	353		EXTEND UP NF35
10	232+35	235+00	LT			265			3	177		
11	279+85	287+75	RT		790			527			6.5	
12	314+15	316+80	RT			265			3	177		
13	327+35	330+00	RT			265			3	177		
14	332+65	335+30	RT			265			3	177		
15	337+90	340+55	LT			265			3	177		
16	337+90	343+20	RT			530			78	353		
17	348+50	351+15	RT			265			3	177		
18	359+05	361+70	RT			265			3	177		
19	396+00	403+95	LT			795			116	530		
20	411+85	419+80	LT			795			116	530		
21	422+40	440+90	LT			1850			271	1233		
ROUNDINGS					-	-		11	6	17	-	
TOTALS					845	9795		575	1010	6550	7	

LOCATION				FEET OF DITCHING				MISC. ITEMS				REMARKS
								653.20	613.10	649.31	651.15	
SITE	STATION	STATION	POS.	PERCENT GRADE				TEMP. EROS. MATT.	STONE FILL TYPE I	GEOT. UNDER STONE FILL	SEED	
				0-1	1-2.5	2.5-10	>10	SY	CY	SY	LB	

LOCATION				FEET OF DITCHING				MISC. ITEMS				REMARKS
								653.20	613.10	649.31	651.15	
SITE	STATION	STATION	POS.	PERCENT GRADE				TEMP. EROS. MATT.	STONE FILL TYPE I	GEOT. UNDER STONE FILL	SEED	
				0-1	1-2.5	2.5-10	>10	SY	CY	SY	LB	

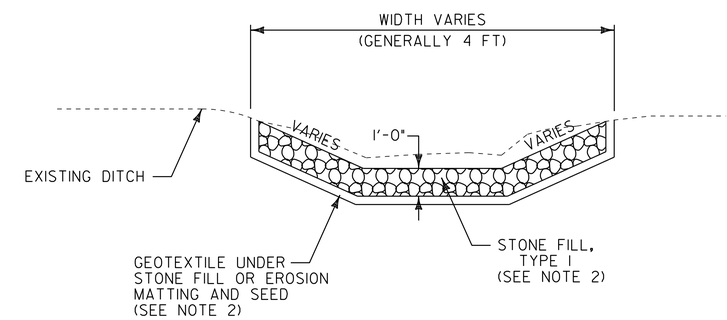

DITCH DETAIL

NOTES:

1. PIPE INLET AND OUTLET AREAS AND DITCH CLEANING THROUGHOUT THE PROJECT SHALL BE PERFORMED AT LOCATIONS IDENTIFIED ON THIS SHEET AND AS DIRECTED BY THE RESIDENT ENGINEER. PAYMENT WILL BE UNDER THE APPLICABLE EQUIPMENT RENTAL ITEM(S).

2. ESTIMATED QUANTITIES OF TEMPORARY EROSION MATTING, SEED, STONE FILL TYPE I HAVE BEEN INCLUDED AS NEEDED. DITCHES WITH A GRADE LESS THAN 1 PERCENT SHALL BE SEEDED. TEMPORARY EROSION MATTING SHALL BE USED IN ALL DITCHES WITH A GRADE BETWEEN 1 AND 2.5 PERCENT, STONE FILL TYPE I SHALL BE USED IN ALL DITCHES WITH A GRADE BETWEEN 2.5 AND 10 PERCENT OR AS DIRECTED BY THE RESIDENT ENGINEER.

NOT TO SCALE

DITCH CLEANING DETAIL SHEET

PROJECT NAME: ROCHESTER-CHITTENDEN-ROCHESTER
PROJECT NUMBER: STP 2505(1)S

FILE NAME: p05c046.dgn
PROJECT LEADER: D.E.G.
DESIGNED BY: J.S.P.
IPARM FILE: p05c046dcs.i
PLOT DATE: $DATE$
DRAWN BY: C.A.K.
CHECKED BY: D.E.G.
SHEET 12 OF 56