

**646.40 - DURABLE 4" WHITE LINE**

(TYPE I, TAPE)  
 26+15 - 26+77 (8' LT.)  
 26+19 - 26+59 (40' LT.)  
 27+11 - 27+33 (8' LT.)  
 27+67 - 27+88 (8' LT.)  
 29+68 - 29+97 (40' LT.)  
 30+16 - 31+94 (8' LT.)  
 30+84 - 31+24 (40' LT.)  
 31+87 - 32+00 (40' LT.)

**646.60 - TEMPORARY 4" WHITE LINE**

(PAINT)  
 26+15 - 26+77 (8' LT.) (2 APPLICATIONS)  
 26+19 - 26+59 (40' LT.) (2 APPLICATIONS)  
 27+11 - 27+33 (8' LT.) (2 APPLICATIONS)  
 27+67 - 27+88 (8' LT.) (2 APPLICATIONS)  
 29+68 - 29+97 (40' LT.) (2 APPLICATIONS)  
 30+16 - 31+94 (8' LT.) (2 APPLICATIONS)  
 30+84 - 31+24 (40' LT.) (2 APPLICATIONS)  
 31+87 - 32+00 (40' LT.) (2 APPLICATIONS)

**646.81 - PAINTED CURB**

28+20 - 28+60 (0' LT) (40')

**646.41- DURABLE 4" YELLOW LINE**

(TYPE I, TAPE)  
 26+00 - 28+01 (24' LT.) (DBL.)  
 28+41 - 28+48 (24' LT.) (DBL.)  
 28+56 - 28+66 (24' LT.) (DBL.)  
 29+06 - 32+00 (24' LT.) (DBL.)  
 STEVENS ST. (18') (DBL.)  
 LAFOUNTAIN ST. (26') (DBL.)

**646.61- TEMPORARY 4" YELLOW LINE**

(PAINT)  
 26+00 - 28+01 (24' LT.) (DBL.) (2 APPLICATIONS)  
 28+41 - 28+48 (24' LT.) (DBL.) (2 APPLICATIONS)  
 28+56 - 28+66 (24' LT.) (DBL.) (2 APPLICATIONS)  
 29+06 - 32+00 (24' LT.) (DBL.) (2 APPLICATIONS)  
 STEVENS ST. (18') (DBL.) (2 APPLICATIONS)  
 LAFOUNTAIN ST. (26') (DBL.) (2 APPLICATIONS)

**618.10 - PORTLAND CEMENT CONCRETE SIDEWALK, 5" (MOD.)**

28+07 LT - 6.22 SY  
 28+35 LT - 11.12 SY  
 28+70 RT - 21.11 SY  
 29+03 RT - 7.11 SY

**618.30 - DETECTABLE WARNING SURFACE**

28+07 LT  
 28+35 LT  
 28+70 RT  
 29+03 RT

**646.46 - DURABLE 24" WHITE LINE**

(THERMOPLASTIC)  
 STEVENS ST. (15')  
 LAFOUNTAIN ST. (16')

**646.66 - TEMPORARY 24" WHITE LINE**

(PAINT)  
 STEVENS ST. (15') (2 APPLICATIONS)  
 LAFOUNTAIN ST. (16') (2 APPLICATIONS)

**646.50 DURABLE LETTER OR SYMBOL**

(THERMOPLASTIC)  
 STEVENS ST. (S,T,O,P) (4 EA.)  
 LAFOUNTAIN ST. (S,T,O,P) (4 EA.)  
 28+31 (4' LT.) (B,U,S) (3 EA.)  
 28+49 (4' LT.) (O,N,L,Y) (4 EA.)

**646.70 TEMPORARY LETTERS OR SYMBOLS**

(PAINT)  
 STEVENS ST. (S,T,O,P) (4 EA.) (2 APPLICATIONS)  
 LAFOUNTAIN ST. (S,T,O,P) (4 EA.) (2 APPLICATIONS)  
 28+31 (4' LT.) (B,U,S) (3 EA.) (2 APPLICATIONS)  
 28+49 (4' LT.) (O,N,L,Y) (4 EA.) (2 APPLICATIONS)

**646.51 DURABLE CROSSWALK MARKING W/DIAG. LINES (MOD.)**

(THERMOPLASTIC)  
 28+51 (48')  
 STEVENS ST. (33')  
 LAFOUNTAIN ST. (37')

**646.71 TEMPORARY CROSSWALK MARKING W/DIAG LINES (MOD.)**

(PAINT)  
 28+51 (48') (2 APPLICATIONS)  
 STEVENS ST. (33') (2 APPLICATIONS)  
 LAFOUNTAIN ST. (37') (2 APPLICATIONS)

**675.60 ERECTING SALVAGED SIGNS**

AS SHOWN - I

**675.50 REMOVING SIGNS**

AS SHOWN - IO

**604.412 - REHABING DI, CB OR MH**


26+47 - 48' LT (DI)  
 26+53 - @ CURB RT (DI)  
 27+99 - @ CURB RT (DI)  
 28+59 - 48' LT (DI)  
 29+23 - @ CURB RT (DI)  
 29+52 - 48' LT (DI)  
 30+51 - 48' LT (DI)  
 30+87 - @ CURB RT (DI)

**604.42 - CHANGE ELEVATION OF SEWER MANHOLES**

27+96 - 24' LT (SMH)  
 28+16 - 48' LT (SMH)  
 28+24 - 24' LT (SMH)  
 30+47 - 24' LT (SMH)

**629.20 - ADJUST ELEVATION OF VALVE BOXES**

28+32 - 50' LT (WSO)  
 28+59 - 17' LT (WSO)  
 28+60 - 19' LT (WSO)  
 28+88 - 8' RT (WSO)  
 28+91 - 16' LT (WSO)  
 29+09 - 17' LT (WSO)

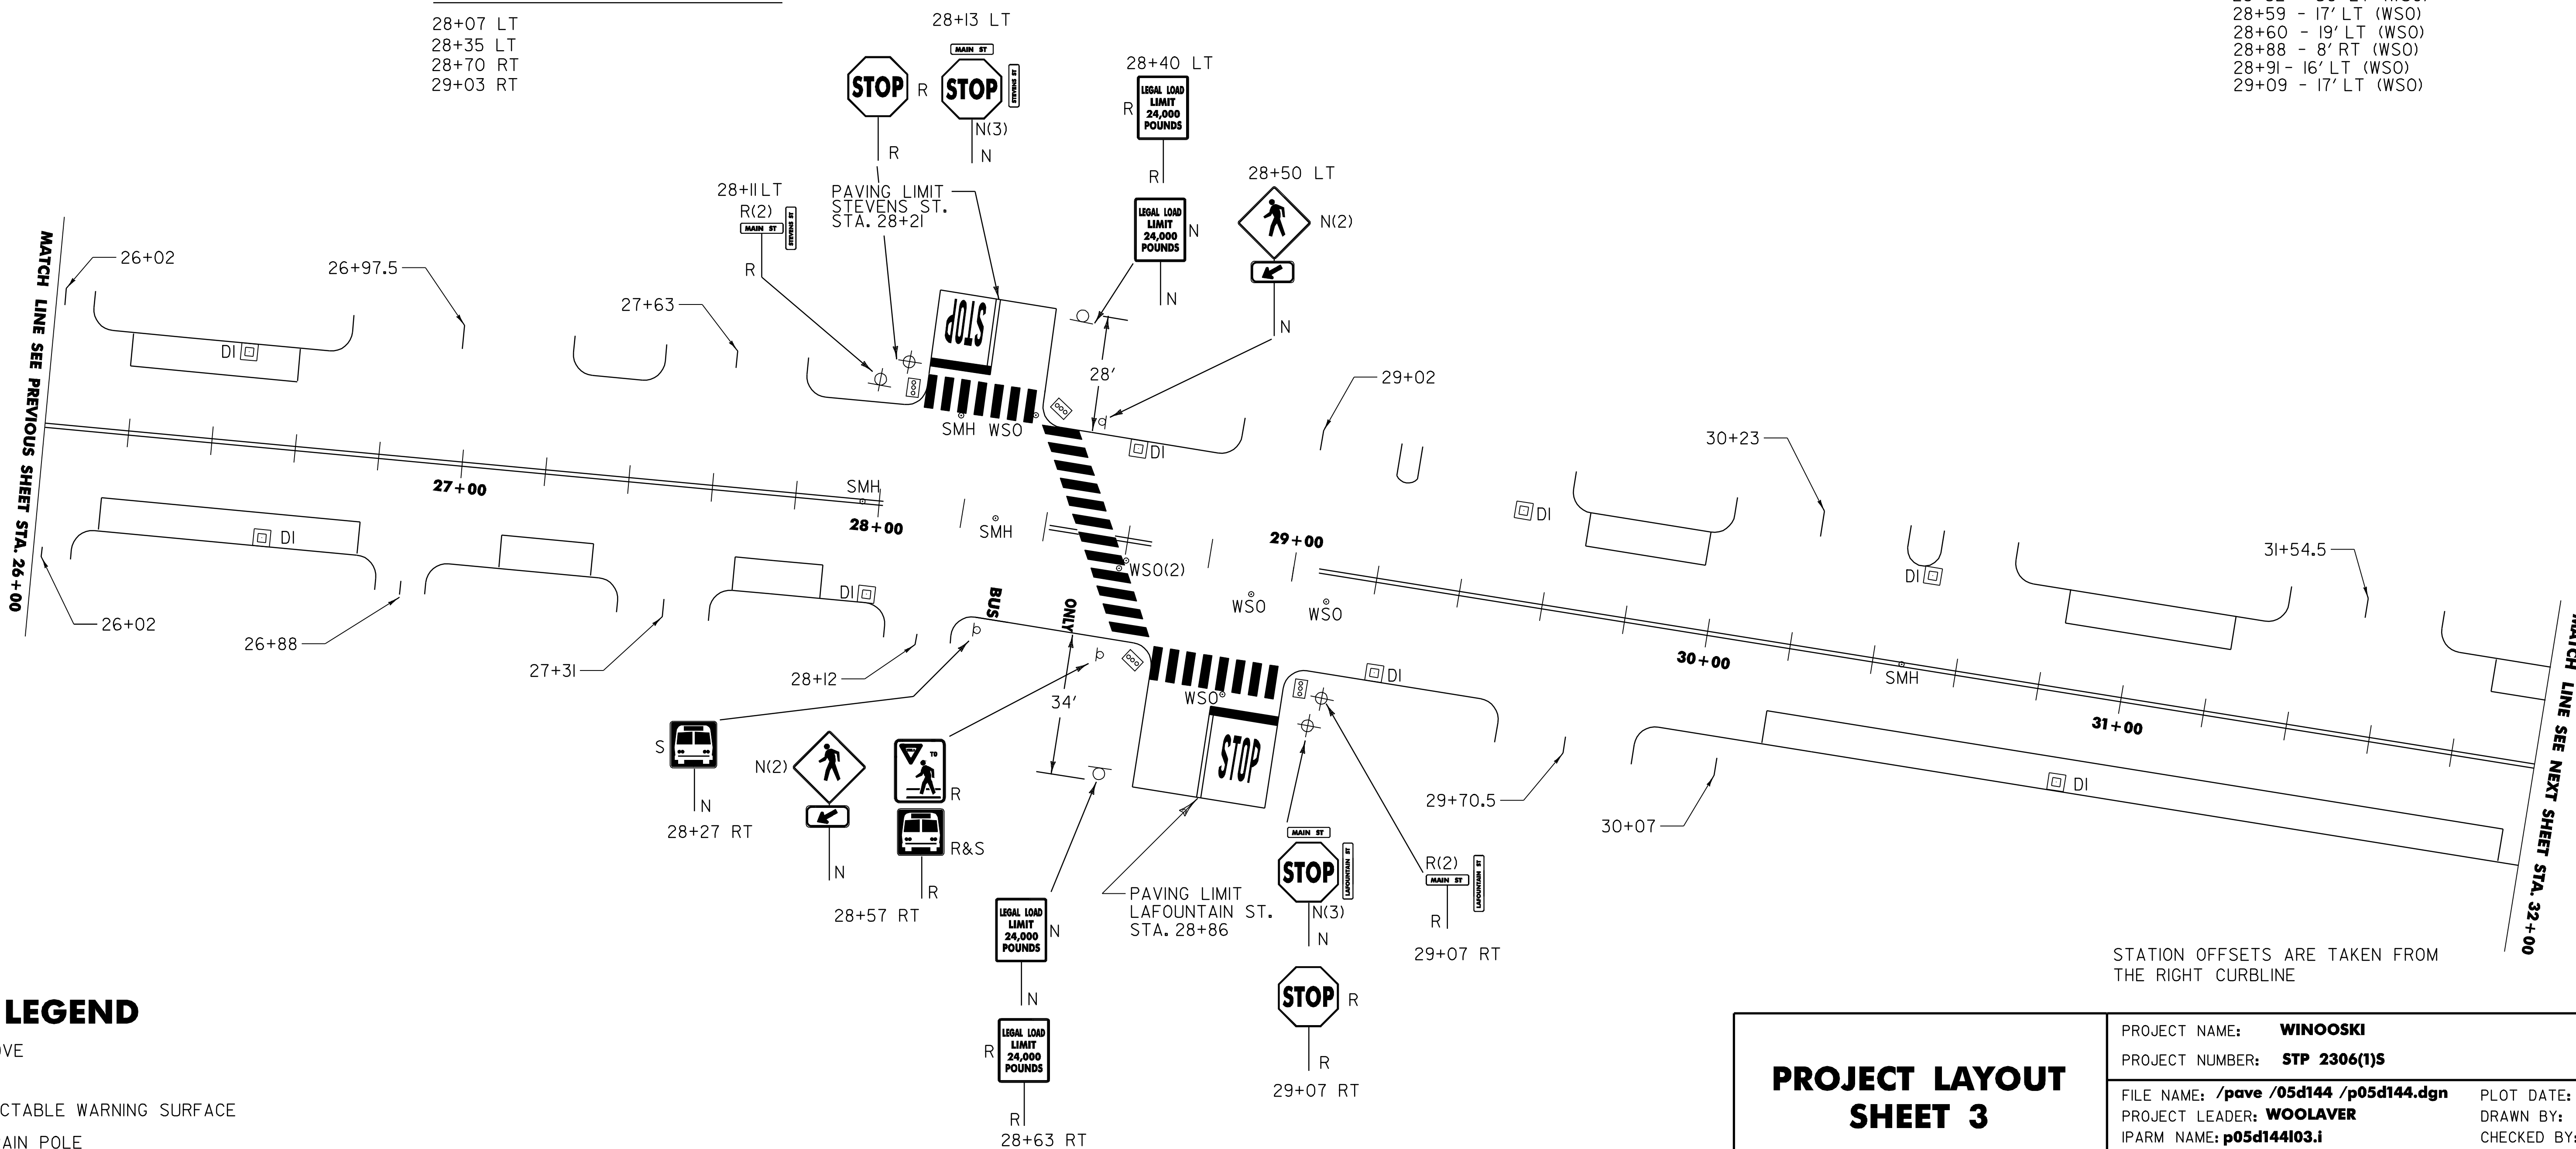

STATION OFFSETS ARE TAKEN FROM THE RIGHT CURBLINE

**LEGEND**

R = REMOVE  
 N = NEW  
 DI = DETECTABLE WARNING SURFACE  
 SP = STRAIN POLE

**PROJECT LAYOUT SHEET 3**

PROJECT NAME: <b>WINOOSKI</b>	PLOT DATE: 18-JAN-2008 11:43
PROJECT NUMBER: <b>STP 2306(1)S</b>	DRAWN BY: <b>WILDER</b>
FILE NAME: /pave /05d144 /p05d144.dgn	CHECKED BY: <b>PAVT MGMT</b>
PROJECT LEADER: <b>WOOLAVER</b>	SHEET 9 OF 23
IPARM NAME: <b>p05d144103.i</b>	

**NTS**