
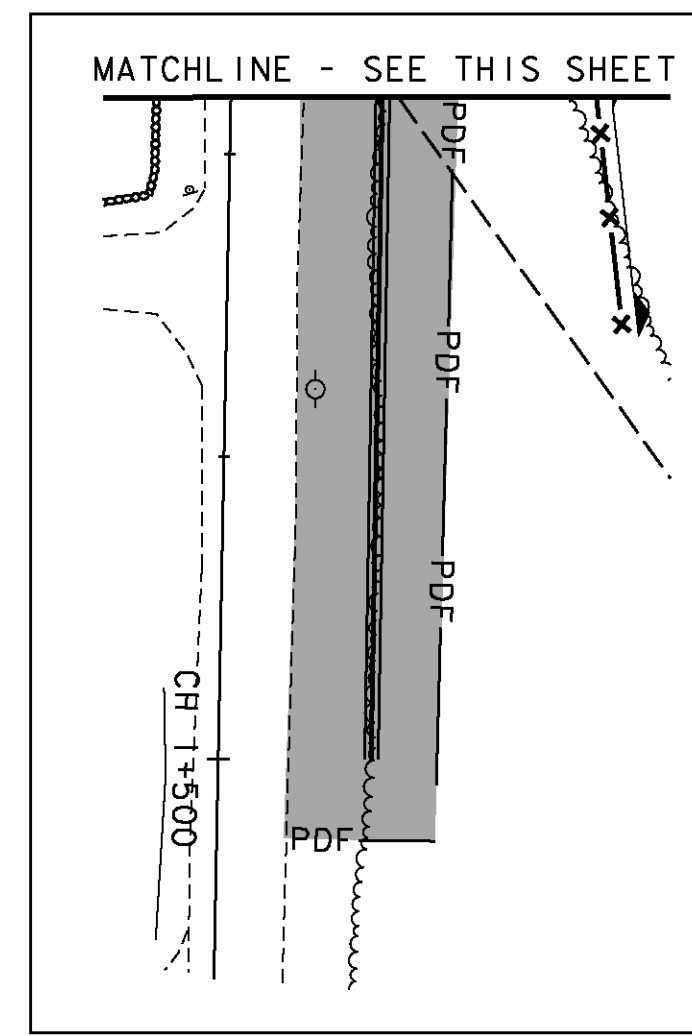


**HAY MULCH**  
STA NB 8+350, 33 m LT - STA NB 8+420, RT



**SEED, WINTER RYE**  
STA NB 8+350, LT - STA NB 8+420, RT

**VEHICLE TRACKING PAD**  
STA CH 1+385, LT

- NOTES:
- FOR STABILIZED CONSTRUCTION ENTRANCE, SEE SHEET EP & SC DETAILS 6. ITEM IS PAID FOR AS 653.35 - VEHICLE TRACKING PAD
  - FOR ROLLED EROSION CONTROL PRODUCT, SEE SHEET EP & SC DETAILS 5. ITEM PAID FOR AS 653.20 - TEMPORARY EROSION MATTING
  - FOR SILT FENCE, SEE SHEET EP & SC DETAILS 4. ITEM IS PAID FOR AS 649.51- GEOTEXTILE FOR SILT FENCE.
  - FOR FILTER FABRIC DROP INLET PROTECTION OR STONE & BLOCK DROP INLET PROTECTION, SEE SHEET EP & SC DETAILS 2. ITEM IS PAID FOR AS 653.40- INLET PROTECTION DEVICE, TYPE 1.
  - FOR CHECK DAM, SEE SHEET EP & SC DETAILS 3. ITEM IS PAID FOR AS 653.25 - TEMPORARY STONE CHECK DAM, TYPE 1

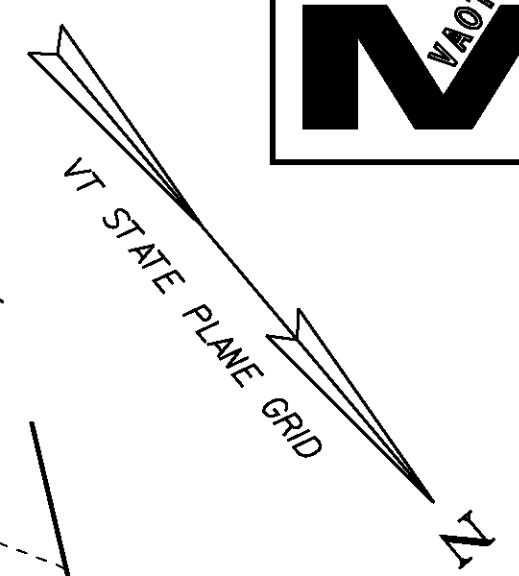

LEGEND	
	VEHICLE TRACKING PAD
	TEMPORARY EROSION MATTING
	SEED AND MULCH
	SILT FENCE
	INLET PROTECTION DEVICE, TYPE 1 (CATCH BASIN OR DROP INLET)
	INLET PROTECTION DEVICE, TYPE 1 (CULVERT)
	FILTER BAG
	PERMANENT STONE CHECK DAM
	TEMPORARY STONE CHECK DAM
	STONE OUTLET PROTECTION

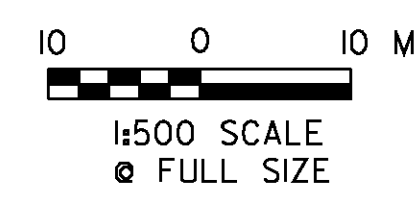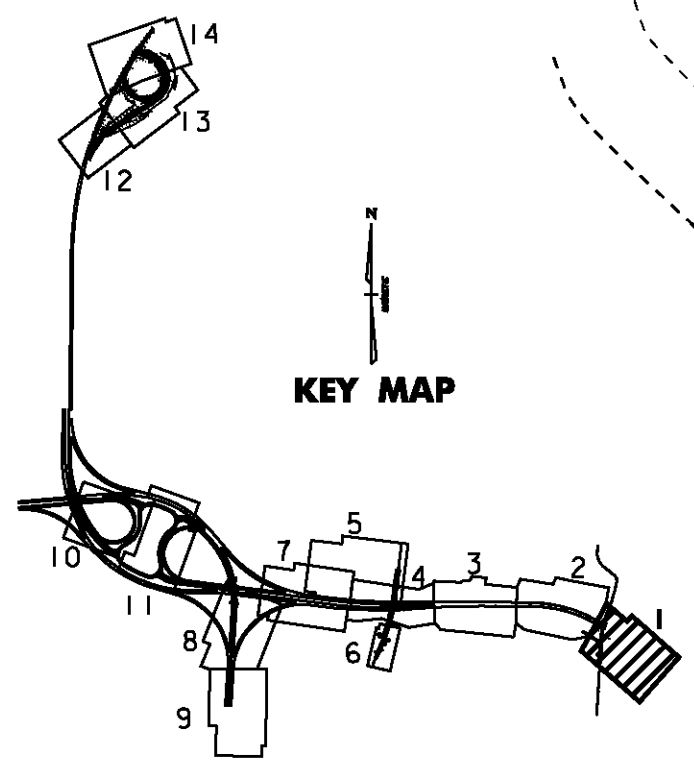

**VERMONT AGENCY OF TRANSPORTATION**

PROJECT NAME: BENNINGTON  
PROJECT NUMBER: AC NH 019-(153)

FILE NAME: ...\\zd307c3ero\_plans.pf  
DESIGN SUPERVISOR: GREG EDWARDS  
DESIGNED BY: MARC FOISY  
**EROSION CONTROL PLAN EC-01**

PLOT DATE: 5/16/2011  
DRAWN BY: STANTEC  
CHECKED BY: GARY SANTY  
SHEET 117 OF 577

V:\953\0002\1\ansport\01\drawing\contract\_3\plot\_files\zd307c3ero\_plans.pf