


646.402 DURABLE 4 INCH WHITE LINE, THERMOPLASTIC
 (ALL LINES WILL INCLUDE EDGE LINE AND LANE LINE BREAKS AND RADIUS FOR SIDE ROADS)
 STA. 224+00 TO 230+00, SOLID LT & RT
 STA. 227+04 TO 228+04, DOTTED RT
 STA. 228+04 TO 229+06, SOLID RT
 STA. 229+28, DOUBLE SOLID LT (GALLISON HILL ROAD)
 646.412 DURABLE 4 INCH YELLOW LINE, THERMOPLASTIC
 (ALL LINES WILL INCLUDE C BREAKS FOR SIDE ROADS)
 STA. 224+00 TO 227+04, SOLID LT & RT
 STA. 224+00 TO 227+04, DASHED LT & RT
 STA. 227+04 TO 229+06, DOUBLE SOLID LT
 STA. 229+28, DOUBLE SOLID LT (GALLISON HILL ROAD)
 STA. 229+48 TO 230+00, DOUBLE SOLID LT & RT
 646.452 DURABLE 8 INCH YELLOW LINE, THERMOPLASTIC
 STA. 229+48 TO 230+00, SOLID DIAGONALS LT & RT
 646.482 DURABLE 24 INCH STOP BAR, THERMOPLASTIC
 STA. 229+28, LT (GALLISON HILL ROAD)

646.492 DURABLE LETTER OR SYMBOL, THERMOPLASTIC
 STA. 224+17, C - ARROW
 STA. 225+43, C - ARROW
 STA. 225+67, C - ARROW
 STA. 226+58, C - ARROW
 STA. 226+82, C - ARROW
 STA. 228+08, C - ARROW
 STA. 228+55, C - *ONLY*
 STA. 229+00, C - ARROW
 STA. 229+28, LT - 'STOP' (GALLISON HILL ROAD)
 646.602 TEMPORARY 4 INCH WHITE LINE, PAINT
 (ALL LINES WILL INCLUDE EDGE LINE AND LANE LINE BREAKS AND RADIUS FOR SIDE ROADS)
 STA. 224+00 TO 230+00, SOLID LT & RT
 STA. 227+04 TO 228+04, DOTTED RT
 STA. 228+04 TO 229+06, SOLID RT
 STA. 229+28, DOUBLE SOLID LT (GALLISON HILL ROAD)

646.612 TEMPORARY 4 INCH YELLOW LINE, PAINT
 (ALL LINES WILL INCLUDE C BREAKS FOR SIDE ROADS)
 STA. 224+00 TO 227+04, SOLID LT & RT
 STA. 224+00 TO 227+04, DASHED LT & RT
 STA. 227+04 TO 229+06, DOUBLE SOLID LT
 STA. 229+28, DOUBLE SOLID LT (GALLISON HILL ROAD)
 STA. 229+48 TO 230+00, DOUBLE SOLID LT & RT
 646.652 TEMPORARY 8 INCH YELLOW LINE, PAINT
 STA. 229+48 TO 230+00, SOLID DIAGONALS LT & RT

646.682 TEMPORARY 24 INCH STOP BAR, PAINT
 STA. 229+28, LT (GALLISON HILL ROAD)
 646.692 TEMPORARY LETTER OR SYMBOL, PAINT
 STA. 224+17, C - ARROW
 STA. 225+43, C - ARROW
 STA. 225+67, C - ARROW
 STA. 226+58, C - ARROW
 STA. 226+82, C - ARROW
 STA. 228+08, C - ARROW
 STA. 229+00, C - ARROW

675.50 REMOVING SIGNS (TYPE A)
 AS SHOWN - 5
 675.60 ERECTING SALVAGED SIGNS
 AS SHOWN - 1

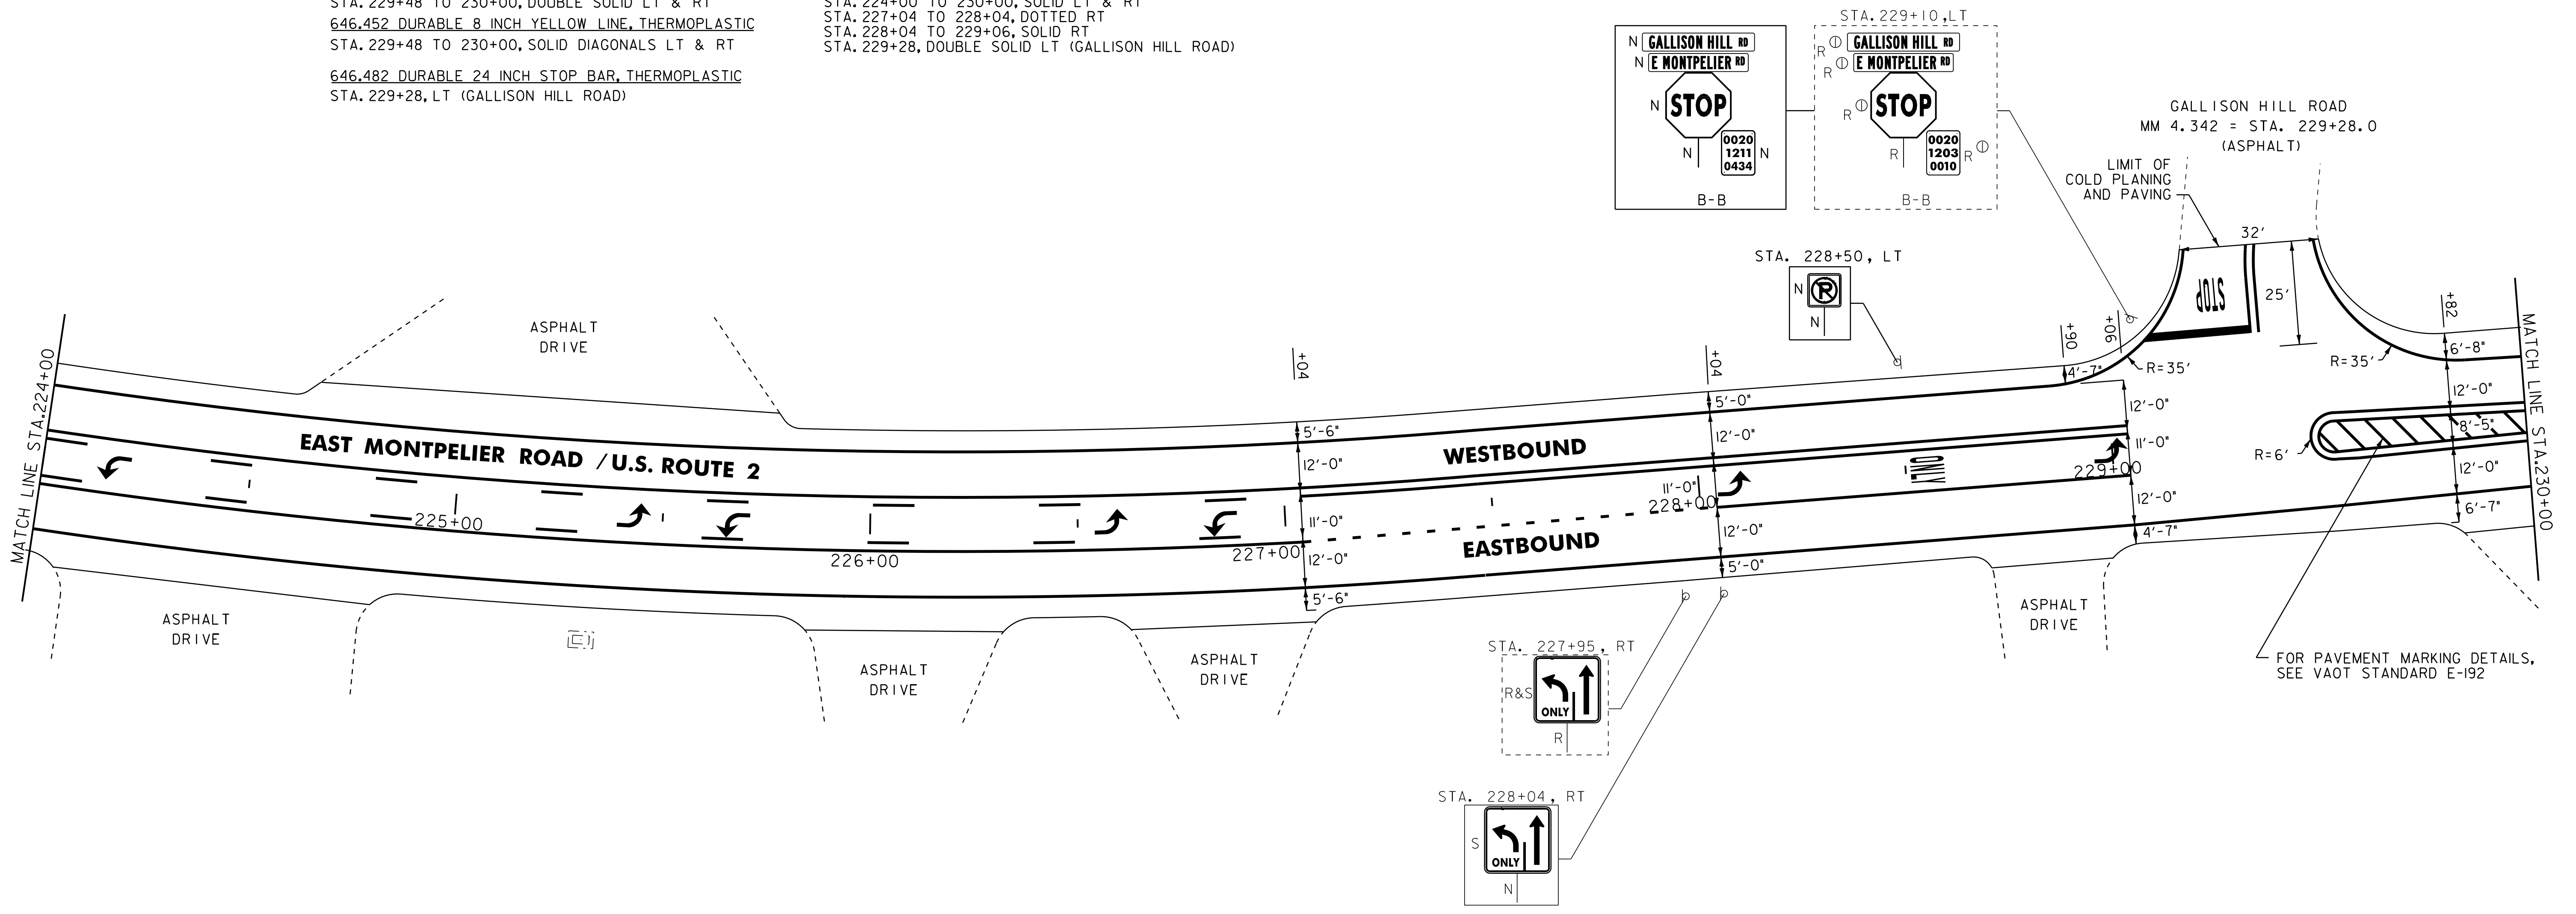

NOTE:
 1. FOR LEGENDS, SEE LAYOUT SHEET #1.
 2. ALL EXISTING SIGNS NOT SHOWN SHALL BE RETAINED AS DIRECTED BY THE RESIDENT ENGINEER.

NOT TO SCALE



PROJECT LAYOUT SHEET #20

PROJECT NAME: MONTPELIER	PLOT DATE: 03-AUG-2011 4:09
PROJECT NUMBER: NH 2604(1)	DRAWN BY: STANTEC
FILE NAME: p06b034.dgn	CHECKED BY: JLL
PROJECT LEADER: JLL	SHEET 37 OF 84
DESIGNED BY: MCF	
IPARM FILE: p06b034120.i	