

604.412 REHAB. DI'S, CB'S, OR MH'S, CLASS I  
 STA. 37+83, RT  
 STA. 38+12, RT  
 STA. 38+23, RT

604.42 CHANGING ELEVATION OF SEWER MANHOLES  
 STA. 37+66, LT

621.20 STEEL BEAM GUARDRAIL, GALVANIZED  
 STA. 37+80.7 TO 38+93.2, LT

621.60 ANCHOR FOR STEEL BEAM RAIL  
 STA. 37+80.7, LT  
 STA. 38+93.2, LT

621.80 REMOVAL AND DISPOSAL OF GUARDRAIL  
 STA. 37+82 TO 38+92, LT

646.402 DURABLE 4 INCH WHITE LINE, THERMOPLASTIC  
 STA. 35+00 TO 41+00, SOLID LT & RT  
 (INCLUDING EDGE LINE BREAKS OR RADII FOR SIDE ROADS)  
 STA. 37+74.1, DOUBLE SOLID RT (SHERWOOD DRIVE)  
 STA. 38+40 TO 39+40, SOLID C (LANE LINE)  
 STA. 39+40 TO 40+40, DOTTED C

646.412 DURABLE 4 INCH YELLOW LINE, THERMOPLASTIC  
 STA. 35+00 TO 36+03, SOLID LT & RT  
 STA. 36+03 TO 37+69, DOUBLE SOLID RT & C  
 STA. 37+74.1, DOUBLE SOLID RT (SHERWOOD DRIVE)  
 STA. 38+40 TO 39+40, DOUBLE SOLID RT  
 STA. 39+40 TO 41+00, DOUBLE SOLID RT & C

646.452 DURABLE 8 INCH YELLOW LINE, THERMOPLASTIC  
 STA. 36+03 TO 37+69, SOLID DIAGONALS RT  
 STA. 39+40 TO 41+00, SOLID DIAGONALS RT

646.482 DURABLE 24 INCH STOP BAR, THERMOPLASTIC  
 STA. 37+74.1, RT (SHERWOOD DRIVE)

646.492 DURABLE LETTER OR SYMBOL, THERMOPLASTIC  
 STA. 37+74.1, RT - 'STOP' (SHERWOOD DRIVE)  
 STA. 38+53, RT - ARROW  
 STA. 38+93, RT - 'ONLY'  
 STA. 39+33, RT - ARROW

646.602 TEMPORARY 4 INCH WHITE LINE, PAINT  
 STA. 35+00 TO 41+00, SOLID LT & RT  
 (INCLUDING EDGE LINE BREAKS OR RADII FOR SIDE ROADS)  
 STA. 37+74.1, DOUBLE SOLID RT (SHERWOOD DRIVE)  
 STA. 38+40 TO 39+40, SOLID C (LANE LINE)  
 STA. 39+40 TO 40+40, DOTTED C


646.612 TEMPORARY 4 INCH YELLOW LINE, PAINT  
 STA. 35+00 TO 36+03, SOLID LT & RT  
 STA. 36+03 TO 37+69, DOUBLE SOLID RT & C  
 STA. 37+74.1, DOUBLE SOLID RT (SHERWOOD DRIVE)  
 STA. 38+40 TO 39+40, DOUBLE SOLID RT  
 STA. 39+40 TO 41+00, DOUBLE SOLID RT & C

646.652 TEMPORARY 8 INCH YELLOW LINE, PAINT  
 STA. 36+03 TO 37+69, SOLID DIAGONALS RT  
 STA. 39+40 TO 41+00, SOLID DIAGONALS RT

646.682 TEMPORARY 24 INCH STOP BAR, PAINT  
 STA. 37+74.1, RT (SHERWOOD DRIVE)

646.692 TEMPORARY LETTER OR SYMBOL, PAINT  
 STA. 38+53, RT - ARROW  
 STA. 39+33, RT - ARROW

675.50 REMOVING SIGNS (TYPE A)  
 AS SHOWN - 2

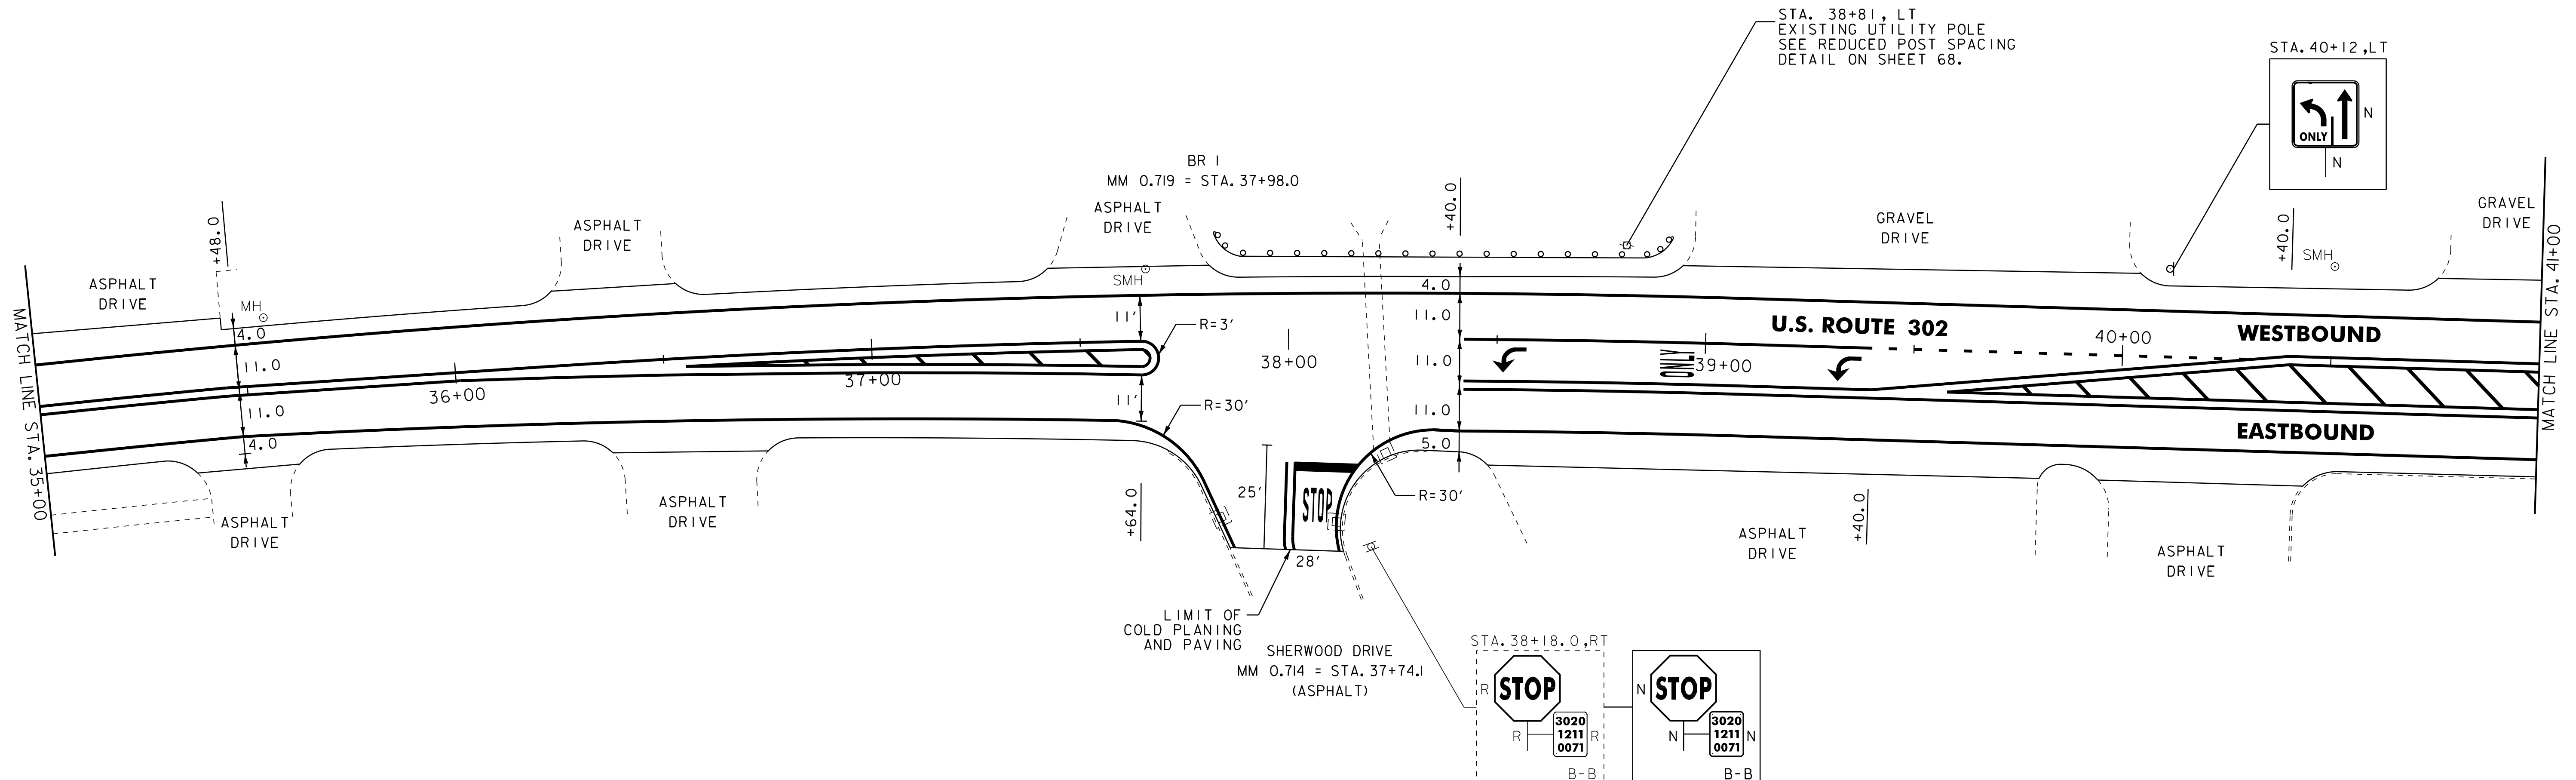

NOTES:  
 1. ALL EXISTING SIGNS NOT SHOWN SHALL BE RETAINED AS DIRECTED BY THE RESIDENT ENGINEER.  
 2. FOR LEGEND, SEE LAYOUT #1.



<b>PROJECT LAYOUT SHEET #6</b>	NOT TO SCALE	
	PROJECT NAME: MONTPELIER	PROJECT NUMBER: STP 2618(I)
	FILE NAME: p06d114.dgn	PLOT DATE: 03-AUG-2011 14:12
	DESIGNED BY: MCF	CHECKED BY: JLL
IPARM FILE: p06d114106.i	DRAWN BY: STANTEC SHEET 79 OF 84	