TEMPORARY 100mm WHITE LINE, PAINT
DURABLE 100mm WHITE LINE, THERMOPLASTIC
STA 3+180 TO 3+221 SOLID RT EDGE LINE
STA 3+180 TO 3+340 SOLID LT EDGE LINE
STA 3+245 TO 3+271 SOLID RT EDGE LINE
STA 3+291 TO 3+340 SOLID RT EDGE LINE

TEMPORARY 100mm YELLOW LINE, PAINT
DURABLE 100mm YELLOW LINE, THERMOPLASTIC
STA 3+180 TO 3+228 SOLID LT & RT
STA 3+233 DOUBLE SOLID RT (CHARLES AVE)
STA 3+240 TO 3+276 SOLID LT & RT
STA 3+276 TO 3+290 DOTTED CL
STA 3+282 DOUBLE SOLID RT (HARTLAND HILL)
STA 3+290 TO 3+340 SOLID LT & RT

TEMPORARY 600mm STOP BAR, PAINT
DURABLE 600mm STOP BAR, TYPE ITAPE
STA 3+233 RT (CHARLES AVE)
STA 3+282 RT (HARTLAND HILL)

TEMPORARY LETTER OR SYMBOL, PAINT
DURABLE LETTER OR SYMBOL, TYPE ITAPE
STA 3+236 RT - "STOP" (CHARLES AVE)
STA 3+285 RT - "STOP" (HARTLAND HILL)

VERTICAL GRANITE CURB
STA 3+269 TO 3+291 LT

CHANGING ELEVATION OF DROP INLETS, CATCH BASINS, OR MANHOLES
STA 3+204 LT (DI) REHAB
STA 3+238 RT (DI)

REHAB. DROP INLETS, CATCH BASINS, OR MANHOLES, CLASS I
STA 3+196 RT (DI) RETAINED
STA 3+262 RT (DI)
STA 3+287 RT (DI)
3+281RT

CHANGING ELEVATION OF SEWER MANHOLES
STA 3+189 LT
STA 3+238 LT
STA 3+278 RT
STA 3+284 RT

ADJUST ELEVATION OF VALVE BOX DONE BY TOWN
STA 3+199 LT
STA 3+334 RT

REMOVAL AND DISPOSAL OF GUARDRAIL
STA 3+312 TO 3+325 RT

STEEL BEAM GUARDRAIL, GALVANIZED
STA 3+310.4 TO 3+314.2 RT
STA3+321.8 TO 3+325.6 RT

SPECIAL PROVISION
(STEEL BEAM GUARDRAIL, GALVANIZED/NESTED)
STA 3+314.2 TO 3+321.8 RT

ANCHOR FOR STEEL BEAM RAIL
STA 3+310.4 RT
STA 3+325.6 RT

REMOVING SIGNS
AS SHOWN - 17

ERECTING SALVAGED SIGNS
AS SHOWN - 4

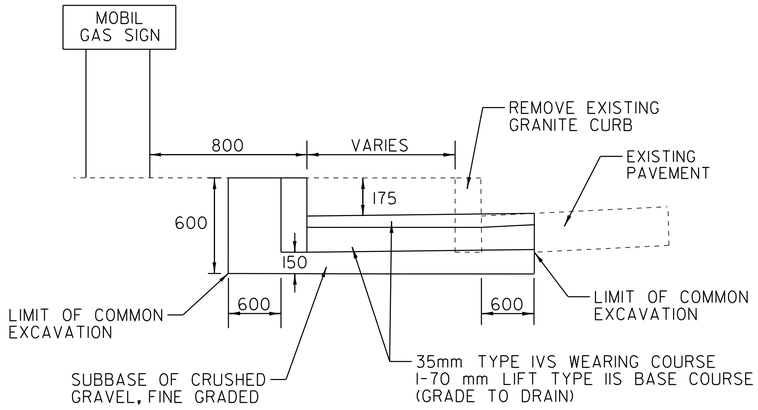

VERTICAL GRANITE CURB DETAIL

NOT TO SCALE

STA 3+269 TO 3+291 LT

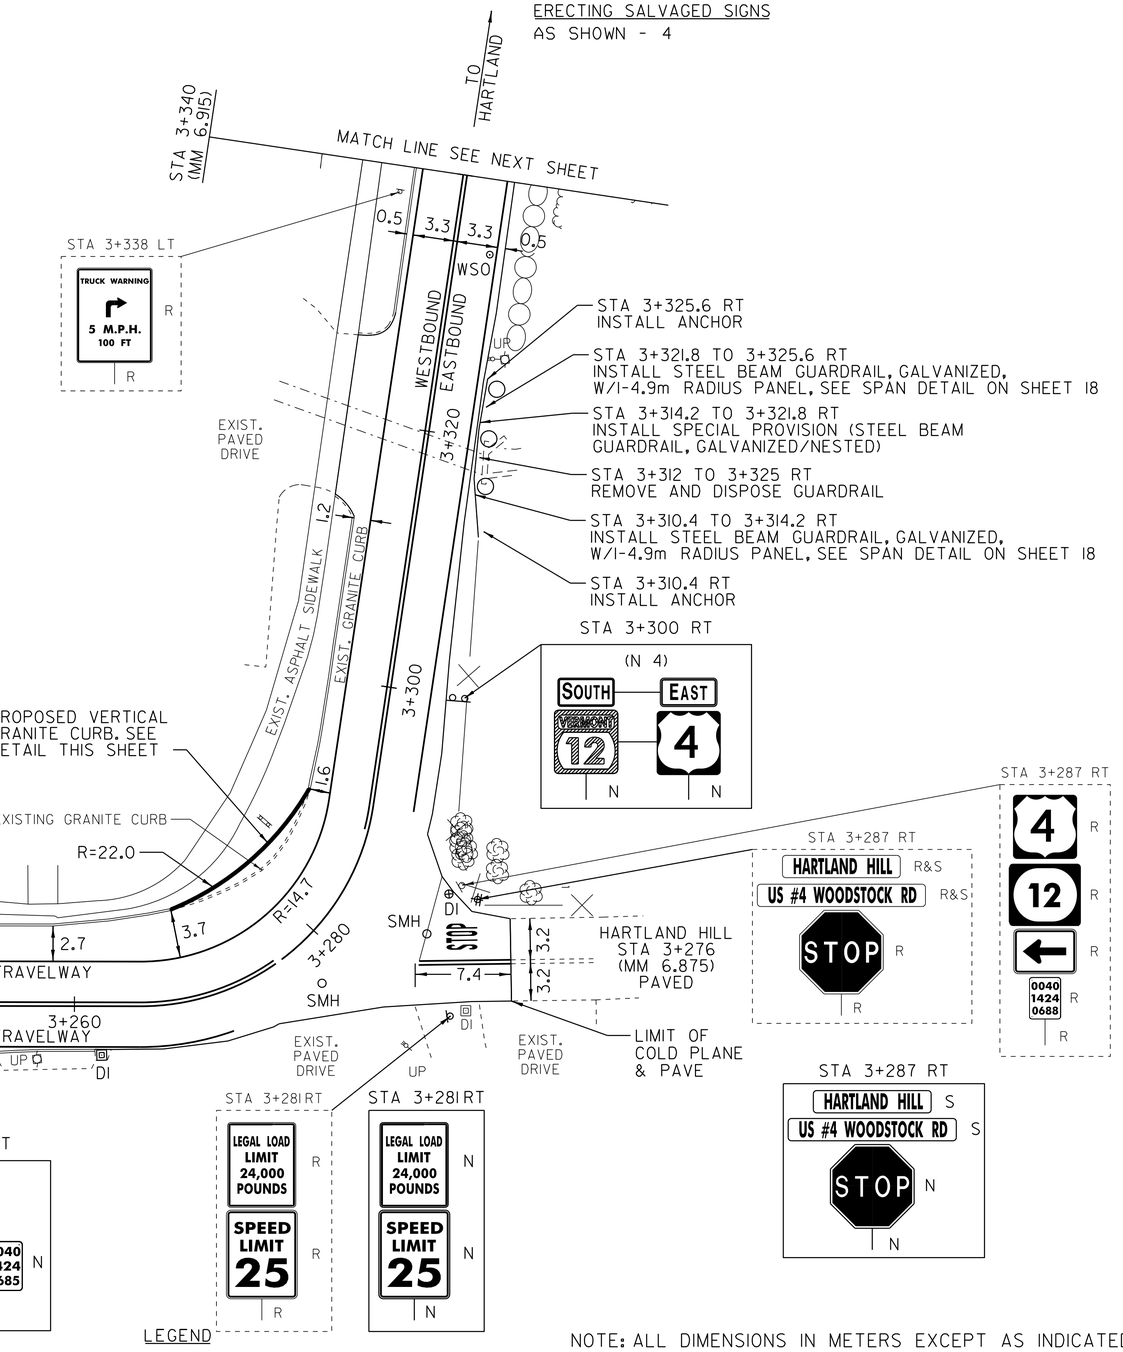

NOT TO SCALE

LEGEND

R	=	REMOVE EXISTING
S	=	SALVAGE
R&S	=	REMOVE AND SALVAGE
N	=	NEW
RET	=	RETAIN
B-B	=	BACK TO BACK
(PM)	=	REMOVE PARKING METER

NOTE: ALL DIMENSIONS IN METERS EXCEPT AS INDICATED

PAVING LAYOUT 14

PROJECT NAME: WOODSTOCK
PROJECT NUMBER: NH 2606(I)S

DESIGN FILE NAME:/pave/06b036/pb036.dgn
IPARM FILE NAME: pb036lal4.i
PROJECT LEADER: PTS
DESIGNED BY: NLL
PLOT DATE: 11-JUN-2012 16:16
DRAWN BY: MRS
CHECKED BY:NLL
SHEET 33 OF 73