

604.412 OR 604.415 REHAB. DIS. CBs OR MHs. CLASS I OR II
 STA. 0+23, LT
 STA. 0+38, RT

621.20 STEEL BEAM GUARDRAIL, GALVANIZED
 STA. 2+19.0 TO 3+50.0, RT

621.60 ANCHOR FOR STEEL BEAM RAIL
 STA. 2+19, RT

621.80 REMOVAL AND DISPOSAL OF GUARDRAIL
 STA. 2+19.0 TO 3+50.0, RT

646.401 DURABLE 4 INCH WHITE LINE, TYPE I TAPE
 (ALL LINES WILL INCLUDE EDGE LINE BREAKS AND
 RADIUS FOR SIDE ROADS)
 STA. 0+21.12 TO 3+50, SOLID LT & RT
 STA. 0+21.12 TO 0+68, SOLID RT
 STA. 0+30 TO 2+54, SOLID LT (LANE LINE)
 STA. 1+75 TO 3+50, DASHED RT
 STA. 2+54 TO 3+50, DASHED LT

646.411 DURABLE 4 INCH YELLOW LINE, TYPE I TAPE
 (ALL LINES WILL INCLUDE C BREAKS FOR SIDE ROADS)
 STA. 0+21.12 TO 0+70, SOLID RT (SLIP RAMP)
 STA. 0+30 TO 0+61, DOUBLE SOLID LT & RT
 STA. 0+61 TO 3+50, SOLID LT & RT (ISLAND)

646.441 DURABLE 8 INCH WHITE LINE, TYPE I TAPE
 STA. 0+68 TO 1+75, SOLID RT (SLIP RAMP)
 STA. 0+70 TO 1+75, SOLID RT (SLIP RAMP)

646.451 DURABLE 8 INCH YELLOW LINE, TYPE I TAPE
 STA. 0+30 TO 0+61, C DIAGONALS

646.481 DURABLE 24 INCH STOP BAR, TYPE I TAPE
 STA. 0+30, LT

646.491 DURABLE LETTER OR SYMBOL, TYPE I TAPE
 STA. 0+39, LT ARROWS (2)
 STA. 0+92, LT "ONLY" (2)
 STA. 1+44, LT ARROWS (2)
 STA. 1+97, LT "ONLY" (2)
 STA. 2+50, LT ARROWS (2)

**BEGIN WATERBURY STP 2201(1)
 VT ROUTE 100 STA. 0+21.12 = MM 0.004**

646.602 TEMPORARY 4 INCH WHITE LINE, PAINT
 (ALL LINES WILL INCLUDE EDGE LINE BREAKS AND
 RADIUS FOR SIDE ROADS)
 STA. 0+21.12 TO 3+50, SOLID LT & RT
 STA. 0+21.12 TO 0+68, SOLID RT
 STA. 0+30 TO 2+54, SOLID LT (LANE LINE)
 STA. 1+24 TO 3+50, DASHED RT
 STA. 2+54 TO 3+50, DASHED LT

646.612 TEMPORARY 4 INCH YELLOW LINE, PAINT
 (ALL LINES WILL INCLUDE C BREAKS FOR SIDE ROADS)
 STA. 0+21.12 TO 0+70, SOLID RT (SLIP RAMP)
 STA. 0+30 TO 0+61, DOUBLE SOLID LT & RT
 STA. 0+61 TO 3+50, SOLID LT & RT (ISLAND)

646.642 TEMPORARY 8 INCH WHITE LINE, PAINT
 STA. 0+68 TO 1+24, RT (SLIP RAMP)
 STA. 0+70 TO 1+24, RT (SLIP RAMP)

646.652 TEMPORARY 8 INCH YELLOW LINE, PAINT
 STA. 0+30 TO 0+61, C DIAGONALS


646.682 TEMPORARY 24 INCH STOP BAR, PAINT
 STA. 0+30, LT

646.692 TEMPORARY LETTER OR SYMBOL, PAINT
 STA. 0+39, LT ARROWS (2)
 STA. 0+92, LT "ONLY" (2)
 STA. 1+44, LT ARROWS (2)
 STA. 1+97, LT "ONLY" (2)
 STA. 2+50, LT ARROWS (2)

646.81 PAINTED CURB
 STA. 0+56 TO 0+86, LT & RT
 STA. 1+40 TO 2+00, RT

646.82 PAINTED ISLAND
 STA. 0+56 TO 3+50, C

675.50 REMOVING SIGNS
 AS SHOWN - I

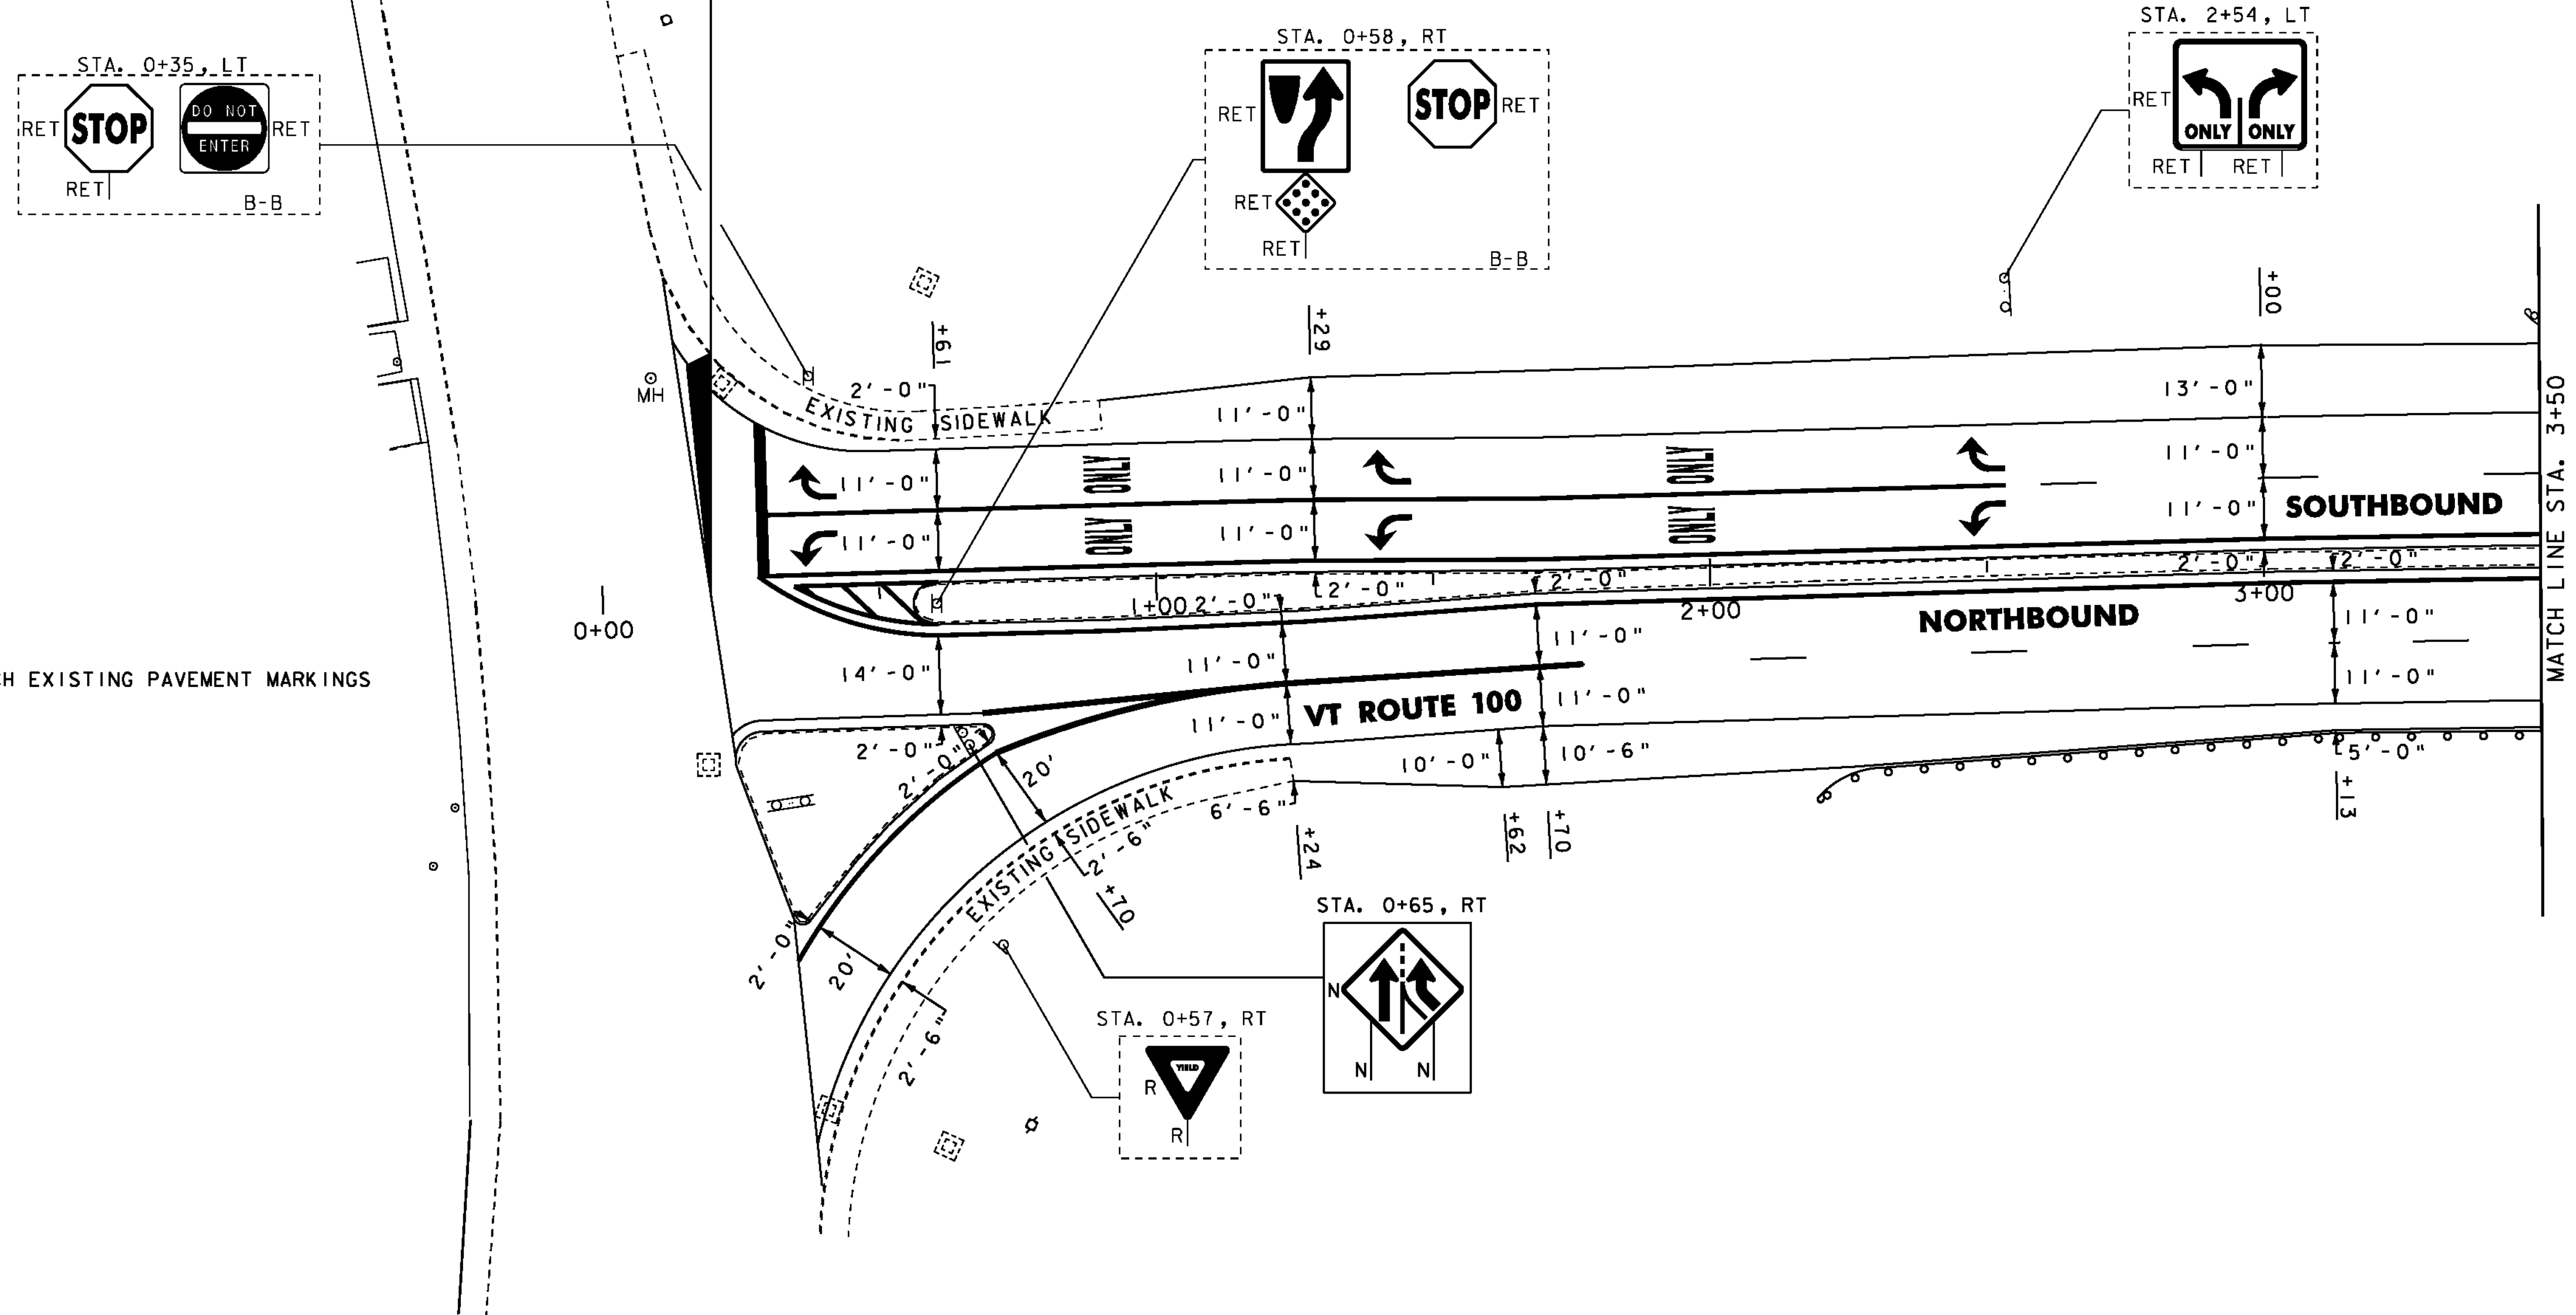

* MATCH EXISTING PAVEMENT MARKINGS

GENERAL LEGEND

- = EXISTING HYDRANT
- = EXISTING DI
- = EXISTING SEWER MANHOLE
- = EXISTING WATER SHUTOFF
- = EXISTING MAILBOX
- = EXISTING PULL BOX
- = EXISTING LIGHT POLE
- = EXISTING DELINEATOR
- = EXISTING UTILITY POLE
- = EXISTING SIGNAL HEAD
- = EXISTING CONTROLLER
- = EXISTING VIDEO VEHICLE DETECTOR
- = PROPOSED VIDEO VEHICLE DETECTOR
- = PROPOSED VIDEO DETECTION AREA
- = EXISTING GUARDRAIL
- = PROPOSED GUARDRAIL

SIGN LEGEND

- N = NEW
- R = REMOVE
- R&S = REMOVE & SALVAGE
- S = SALVAGE SIGN
- RET = RETAIN
- B-B = BACK TO BACK

NOT TO SCALE

NOTE:
 ALL EXISTING SIGNS NOT SHOWN SHALL BE RETAINED.

**PROJECT
 LAYOUT
 SHEET #1**

PROJECT NAME: WATERBURY
 PROJECT NUMBER: STP 2201(1)

FILE NAME: p99b154.dgn
 PROJECT LEADER: JLL
 DESIGNED BY: STANTEC
 IPARM FILE: p99b154i01.i

PLOT DATE: 19-JAN-2011
 DRAWN BY: STANTEC
 CHECKED BY: STANTEC
 SHEET 30 OF 49

