

604.412 OR 604.415 REHAB.
 DIS. CBS OR MHS. CLASS I OR II
 STA. 37+44, LT
 STA. 37+66, LT
 STA. 38+30, LT
 STA. 39+06, LT

621.20 STEEL BEAM GUARDRAIL, GALVANIZED
 STA. 34+62.0 TO 39+50.0, RT

621.80 REMOVAL AND DISPOSAL OF GUARDRAIL
 STA. 34+62.0 TO 39+50.0, RT

646.401 DURABLE 4 INCH WHITE LINE, TYPE I TAPE
 ALL LINES WILL INCLUDE EDGE LINE BREAKS AND
 RADI FOR SIDE ROADS)
 STA. 33+50 TO 39+50, SOLID LT & RT
 STA. 33+50 TO 34+10, SOLID RT (LANE LINE)
 STA. 34+57, DOUBLE SOLID RT (STOWE ST)
 STA. 34+58, DOUBLE SOLID LT (BLUSH HILL RD)
 STA. 35+55 TO 36+58, SOLID LT (LANE LINE)
 STA. 36+58 TO 37+38, DOTTED LT

646.411 DURABLE 4 INCH YELLOW LINE, TYPE I TAPE
 (ALL LINES WILL INCLUDE C BREAKS FOR SIDE ROADS)
 STA. 33+50 TO 34+10, SOLID LT & RT
 STA. 34+57, DOUBLE SOLID RT (STOWE ST)
 STA. 34+58, DOUBLE SOLID LT (BLUSH HILL RD)
 STA. 35+55 TO 37+38 (DOUBLE SOLID RT)
 STA. 37+38 TO 39+50, SOLID LT & RT
 STA. 37+38 TO 39+50, DASHED LT & RT

646.441 DURABLE 8 INCH WHITE LINE, TYPE I TAPE
 STA. 33+50 TO 34+12, LT (DIAGONALS)

646.481 DURABLE 24 INCH STOP BAR, TYPE I TAPE
 STA. 34+10, RT
 STA. 34+57, RT (STOWE ST)
 STA. 34+58, LT (BLUSH HILL RD)
 STA. 35+55, LT

646.491 DURABLE LETTER OR SYMBOL, TYPE I TAPE
 STA. 33+98, RT ARROW (2)
 STA. 34+00, RT ARROW
 STA. 35+66, LT ARROW
 STA. 36+07, LT "ONLY"
 STA. 36+54, LT ARROW
 STA. 37+41, C ARROW
 STA. 38+60, C ARROW

646.602 TEMPORARY 4 INCH WHITE LINE, PAINT
 ALL LINES WILL INCLUDE EDGE LINE BREAKS AND
 RADI FOR SIDE ROADS)
 STA. 33+50 TO 39+50, SOLID LT & RT
 STA. 33+50 TO 34+10, SOLID RT (LANE LINE)
 STA. 34+57, DOUBLE SOLID RT (STOWE ST)
 STA. 34+58, DOUBLE SOLID LT (BLUSH HILL RD)
 STA. 35+55 TO 36+58, SOLID LT (LANE LINE)
 STA. 36+58 TO 37+38, DOTTED LT

646.612 TEMPORARY 4 INCH YELLOW LINE, PAINT
 (ALL LINES WILL INCLUDE C BREAKS FOR SIDE ROADS)
 STA. 33+50 TO 34+10, SOLID LT & RT
 STA. 34+57, DOUBLE SOLID RT (STOWE ST)
 STA. 34+58, DOUBLE SOLID LT (BLUSH HILL RD)
 STA. 35+55 TO 37+38 (DOUBLE SOLID RT)
 STA. 37+38 TO 39+50, SOLID LT & RT
 STA. 37+38 TO 39+50, DASHED LT & RT


646.642 TEMPORARY 8 INCH WHITE LINE, PAINT
 STA. 33+50 TO 34+12, LT (DIAGONALS)

646.682 TEMPORARY 24 INCH STOP BAR, PAINT
 STA. 34+10, RT
 STA. 34+57, RT (STOWE ST)
 STA. 34+58, LT (BLUSH HILL RD)
 STA. 35+55, LT

646.692 TEMPORARY LETTER OR SYMBOL, PAINT
 STA. 33+98, RT ARROW (2)
 STA. 34+00, RT ARROW
 STA. 35+66, LT ARROW
 STA. 36+07, LT "ONLY"
 STA. 36+54, LT ARROW
 STA. 37+41, C ARROW
 STA. 38+60, C ARROW

675.50 REMOVING SIGNS
 AS SHOWN - 2

675.60 ERECTING SALVAGED SIGNS
 AS SHOWN - 2

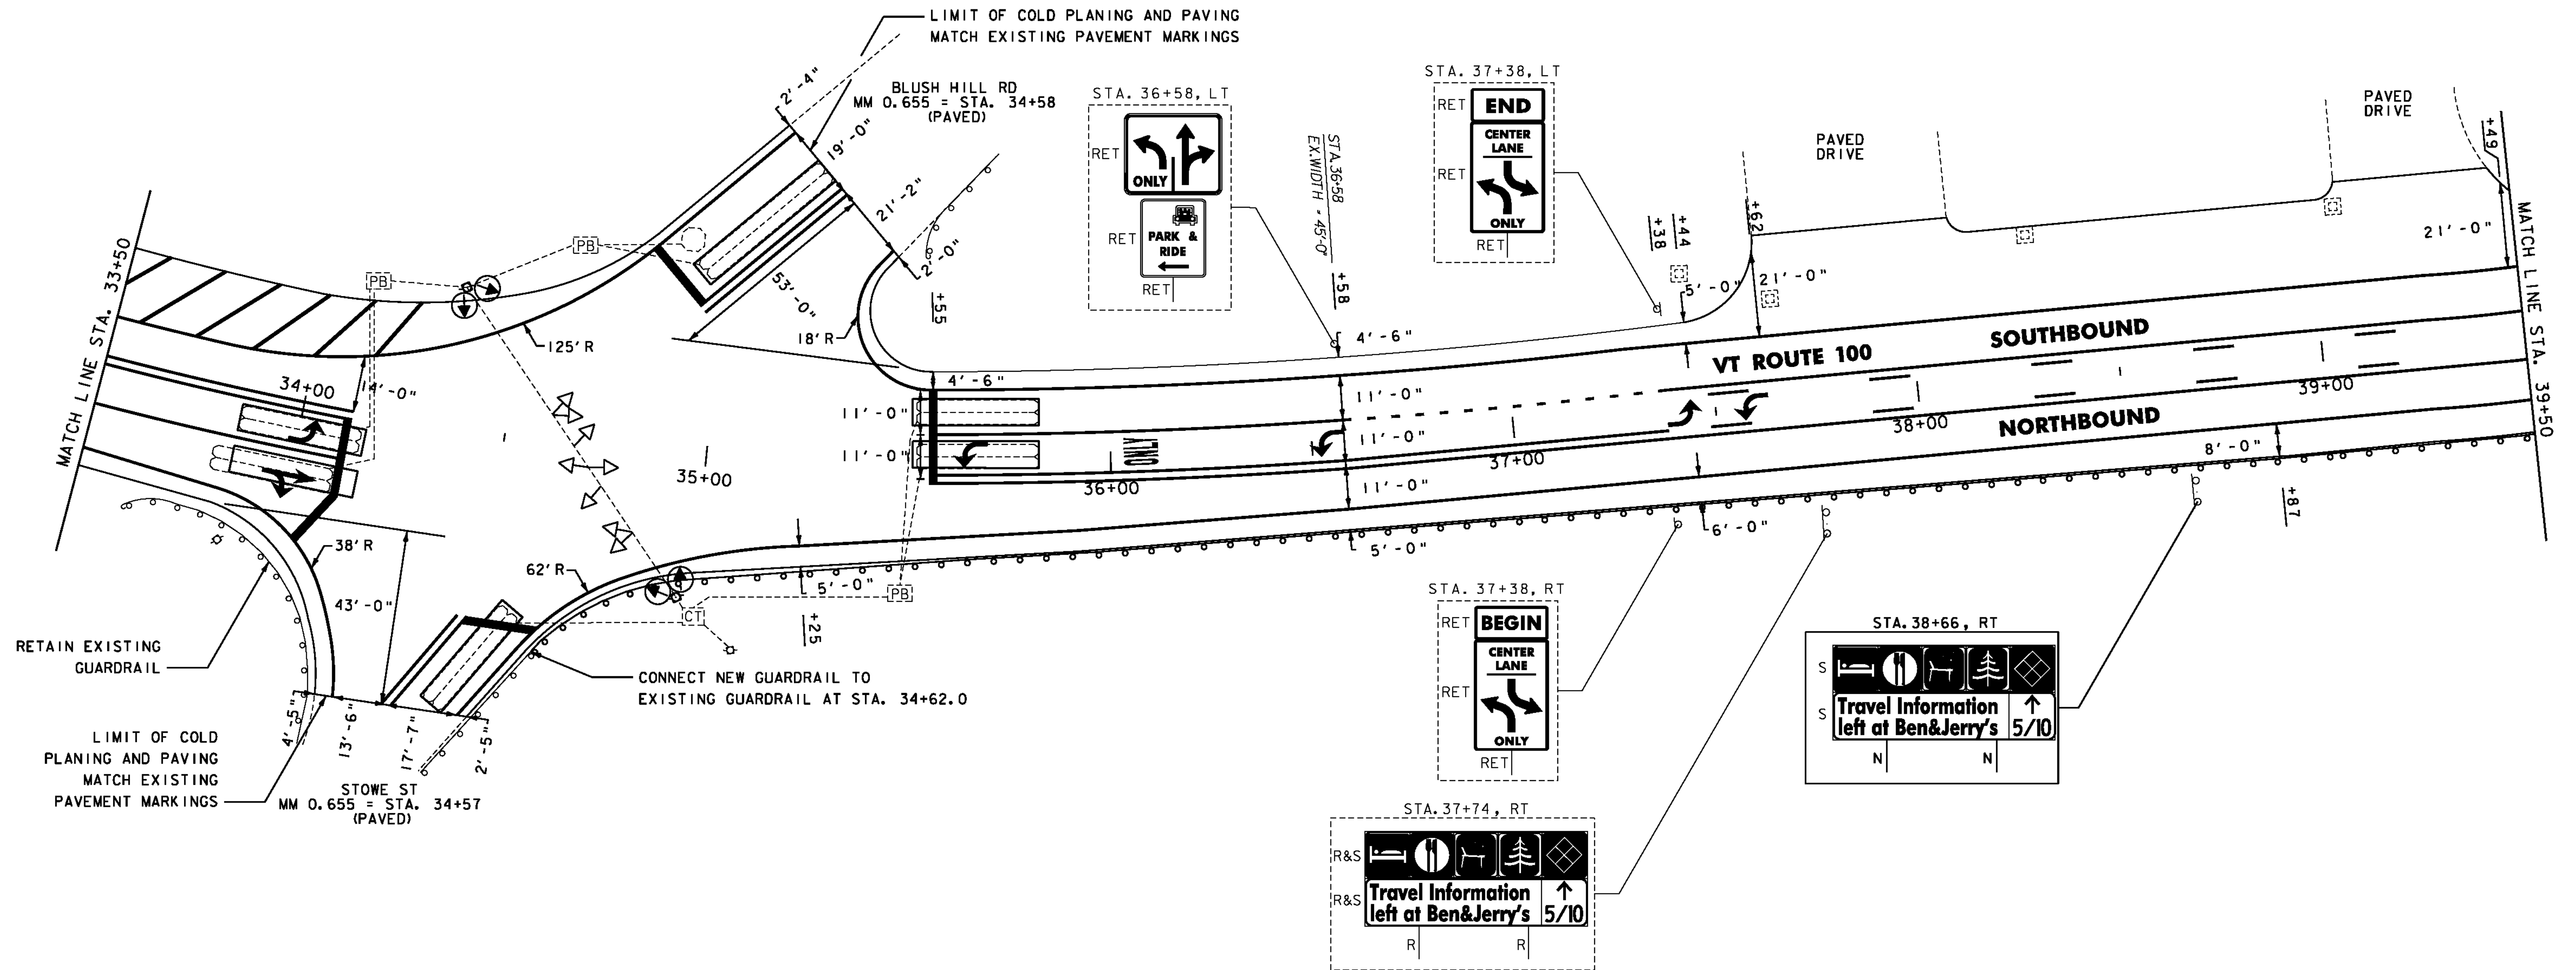

NOTES:
 1. FOR LEGENDS, SEE LAYOUT SHEET #1
 2. ALL EXISTING SIGNS NOT SHOWN SHALL BE RETAINED.

NOT TO SCALE

PROJECT LAYOUT SHEET #7



PROJECT NAME: WATERBURY	PLOT DATE: 12/7/2010
PROJECT NUMBER: STP 2201(1)	DRAWN BY: STANTEC
FILE NAME: p99b154.dgn	CHECKED BY: STANTEC
PROJECT LEADER: JLL	SHEET 36 OF 49
DESIGNED BY: STANTEC	
IPARM FILE: p99b154107.i	