THIS SHEET NOT USED FOR RECORD PLANS

STATION	POSITION	QUANTITY (SY)
TROY		
164+15	LT	15.4
165+18	RT	7.5
165+39	LT	5.5
165+48	RT	6.7
166+33	RT	6.2
168+41	LT	6.1
168+95	RT	8.9
169+36	LT	10.1
170+21	RT	5.9
170+68	LT	5.3
171+30	RT	4.4
171+50	RT	4.4
175+06	RT	32.8
176+27	RT	5.4
177+00	RT	6.2
178+13	RT	4.4
179+84	RT	72.4
181+73	RT	14.3
187+52	RT	9.8
187+84	RT	11.6
190+33	RT	51.6
193+68	RT	46.7
204+70	LT	22.4
208+73	LT	6
213+85	LT	5.4
214+10	LT	8.2
214+67	LT	10.9
215+54	RT	19.6
223+48	RT	8.9
224+44	LT	19.6
225+75	RT	12.4
225+94	LT	11.6
228+32	RT	10.7
230+99	LT	5.7
236+24	RT	8.4

STATION	POSITION	QUANTITY (SY)
240+44	RT	9.1
252+60	RT	10.7
254+47	LT	35.6
258+60	RT	10.7
261+16	RT	10.2
264+56	RT	10
267+27	LT	14
267+81	RT	15.1
273+15	RT	14.7
276+65	LT	14.7
280+55	RT	17.8
284+85	LT	60.4
286+43	RT	33.8
295+71	RT	19.1
304+49	LT	11.6
317+74	LT	26.9
322+72	RT	11.6
323+02	LT	11.6
326+55	LT	15.6
NEWPORT		
7+79	RT	14.6
12+93	LT	12.4
21+40	LT	9.3
22+55	RT	8.4
22+73	LT	8.3
26+55	LT	13.1
32+01	LT	10.8
34+33	RT	61
34+36	LT	16.9
36+04	LT	13.4
38+99	LT	11.4
41+52	LT	14.9
43+76	LT	9
48+03	LT	10.7
50+30	LT	13.9

STATION	POSITION	QUANTITY (SY)
51+65	LT	9.6
52+49	LT	7.4
58+17	LT	10.8
58+49	RT	10.1
62+56	RT	10.8
65+68	RT	26.1
66+93	RT	11.3
67+82	RT	7.4
68+58	RT	42
68+62	LT	85.2
79+17	RT	10.9
81+80	LT	7.8
82+65	LT	12.2
83+98	RT	15.9
84+34	LT	9.8
85+99	RT	17.6
88+87	RT	18
89+37	RT	5.8
89+43	LT	6.7
92+11	RT	12.8
98+77	LT	10.7
99+29	LT	9.7
102+72	RT	14.6
103+42	RT	12
103+47	LT	10.7
112+52	RT	13.1
113+74	LT	15.3
114+44	LT	14.4
116+11	RT	8.9
119+65	RT	9.8
125+37	RT	12.3
	SUBTOTAL	1542.4
	ROUNDING	57.6
	TOTAL	1600

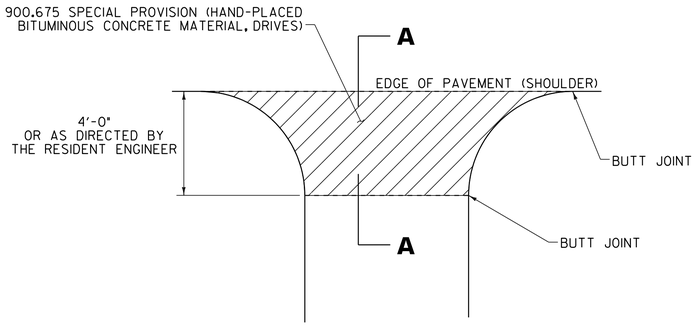

PLAN

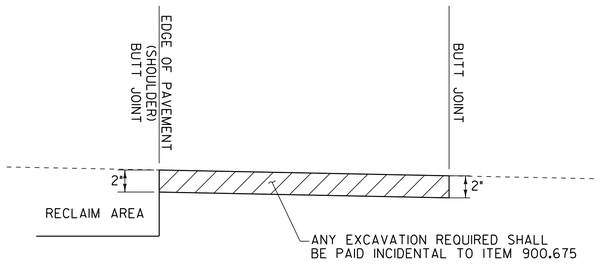

SECTION A–A

HANDWORK DETAILS FOR PAVED DRIVES

VT ROUTE 105

NOTES:

1. PAVING LIFT NOT TO EXCEED 2'' (50mm)

2. THE COST OF PLACING SUBBASE MATERIAL, CLEANING EXISTING PAVED SURFACES, INCLUDING POWER EQUIPMENT, AND FOR FILLING JOINTS, CRACKS AND HOLES WILL NOT BE PAID DIRECTLY BUT WILL BE CONSIDERED INCLUDED IN THE UNIT PRICE BID FOR ITEM 900.675.

3. EXCAVATION NEEDED TO ACHIEVE PROPER DRIVE SLOPES WILL NOT BE PAID DIRECTLY BUT WILL BE CONSIDERED INCLUDED IN THE UNIT PRICE BID FOR ITEM 900.675.

LEGEND

BITUMINOUS PAVEMENT 900.675 SPECIAL PROVISION (HAND-PLACED BITUMINOUS CONCRETE MATERIAL, DRIVES)

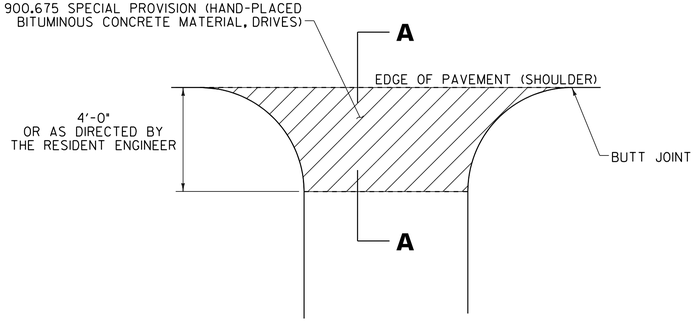

PLAN

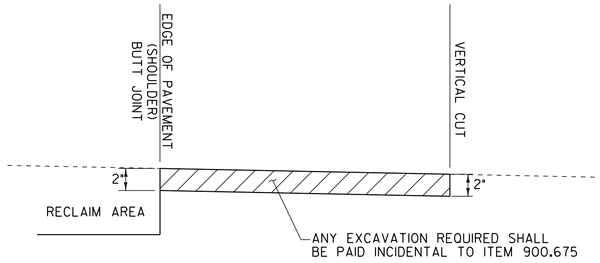

SECTION A–A

HANDWORK DETAILS FOR GRAVEL DRIVES

VT ROUTE 105

DETAILS ARE NOT TO SCALE

HANDWORK FOR DRIVES DETAIL SHEET

PROJECT NAME: TROY-NEWPORT
PROJECT NUMBER: STP 2613(1)

FILE NAME: 06B056.dgn
PROJECT LEADER: CDL
DESIGNED BY: RHB
PLOT FILE: 06b056*08.i

PLOT DATE: 25-OCT-2011 12:17
DRAWN BY: RHB
CHECKED BY: EPD
SHEET 8 OF 31