LOCATION				FEET OF DITCHING				MISC. ITEMS		REMARKS
								653.20	651.15	
SITE	STATION	STATION	POS.	PERCENT GRADE				TEMP. EROS. MATT.	SEED	
				0-1	1-2.5	2.5-10	>10			
U.S. ROUTE 4								SY	LB	
WOODSTOCK:										
1	158+40	161+04	LT		264			176	2	
2	184+80	196+42	LT		1162			773	7	
ROUNDINGS					-			26	1	
TOTALS					1426			975	10	

LOCATION				FEET OF DITCHING				MISC. ITEMS		REMARKS
								653.20	651.15	
SITE	STATION	STATION	POS.	PERCENT GRADE				TEMP. EROS. MATT.	SEED	
				0-1	1-2.5	2.5-10	>10			
								CY	SY	

LOCATION				FEET OF DITCHING				MISC. ITEMS		REMARKS
								653.20	651.15	
SITE	STATION	STATION	POS.	PERCENT GRADE				TEMP. EROS. MATT.	SEED	
				0-1	1-2.5	2.5-10	>10			
								CY	SY	

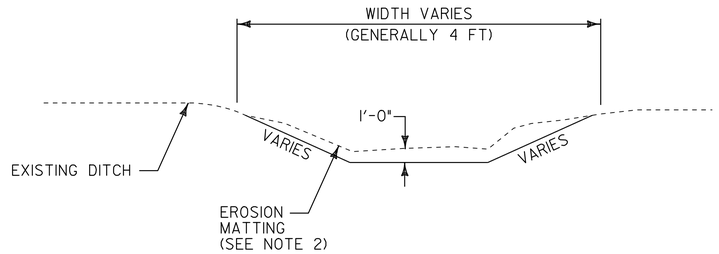

DITCH DETAIL

NOTES:

1. PIPE INLET AND OUTLET AREAS AND DITCH CLEANING THROUGHOUT THE PROJECT SHALL BE PERFORMED AT LOCATIONS IDENTIFIED ON THIS SHEET AND AS DIRECTED BY THE RESIDENT ENGINEER. PAYMENT WILL BE UNDER THE APPLICABLE EQUIPMENT RENTAL ITEM(S).

2. ESTIMATED QUANTITIES OF TEMPORARY EROSION MATTING AND SEED HAVE BEEN INCLUDED AS NEEDED OR AS DIRECTED BY THE RESIDENT ENGINEER.

NOT TO SCALE

DITCH CLEANING DETAIL SHEET

PROJECT NAME: BRIDGEWATER--WOODSTOCK
PROJECT NUMBER: NH-26II(I)S

FILE NAME: p06bl60.dgn
PROJECT LEADER: D.E.G.
DESIGNED BY: D.W.E.
IPARM FILE: p06bl60dcs.i

PLOT DATE: 28-MAY-2010
DRAWN BY: C.A.K.
CHECKED BY: D.E.G.
SHEET 11 OF 80