

646.412 DURABLE 4 INCH YELLOW LINE, THERMOPLASTIC  
 (ALL LINES WILL INCLUDE C/L BREAKS FOR TOWN HIGHWAYS) S=SOLID, D=DASHED

WOODSTOCK:  
 STA. 231+00.00 DOUBLE SOLID LT, TH-23  
 STA. 231+36.96 DOUBLE SOLID LT, TH-II4

646.482 DURABLE 24" STOP BAR, THERMOPLASTIC

WOODSTOCK:  
 STA. 231+00.00 LT, TH-23  
 STA. 231+36.96 LT, TH-II4

646.492 DURABLE LETTER OR SYMBOL, THERMOPLASTIC

WOODSTOCK:  
 STA. 231+00.00 LT, TH-23 "S,T,O,P" (4 EA)  
 STA. 231+36.96 LT, TH-II4 "S,T,O,P" (4 EA)

646.612 TEMPORARY 4 INCH YELLOW LINE, PAINT  
 (ALL LINES WILL INCLUDE C/L BREAKS FOR TOWN HIGHWAYS) S=SOLID, D=DASHED

WOODSTOCK:  
 STA. 231+00.00 DOUBLE SOLID LT, TH-23  
 STA. 231+36.96 DOUBLE SOLID LT, TH-II4

646.682 TEMPORARY 24" STOP BAR, PAINT

WOODSTOCK:  
 STA. 231+00.00 LT, TH-23  
 STA. 231+36.96 LT, TH-II4

646.692 TEMPORARY LETTER OR SYMBOL, PAINT

WOODSTOCK:  
 STA. 231+00.00 LT, TH-23 "S,T,O,P" (8 EA)  
 STA. 231+36.96 LT, TH-II4 "S,T,O,P" (8 EA)

646.442 DURABLE 8 INCH WHITE LINE, THERMOPLASTIC  
 (ALL LINES WILL INCLUDE C/L BREAKS FOR TOWN HIGHWAYS) S=SOLID, D=DASHED


WOODSTOCK:  
 STA. 231+36.96 - STA. 231+75.00 SHOULDER HATCHING LT, TH-II4

675.50 REMOVING SIGNS

AS SHOWN - II

675.60 ERECTING SALVAGED SIGNS

AS SHOWN - 4

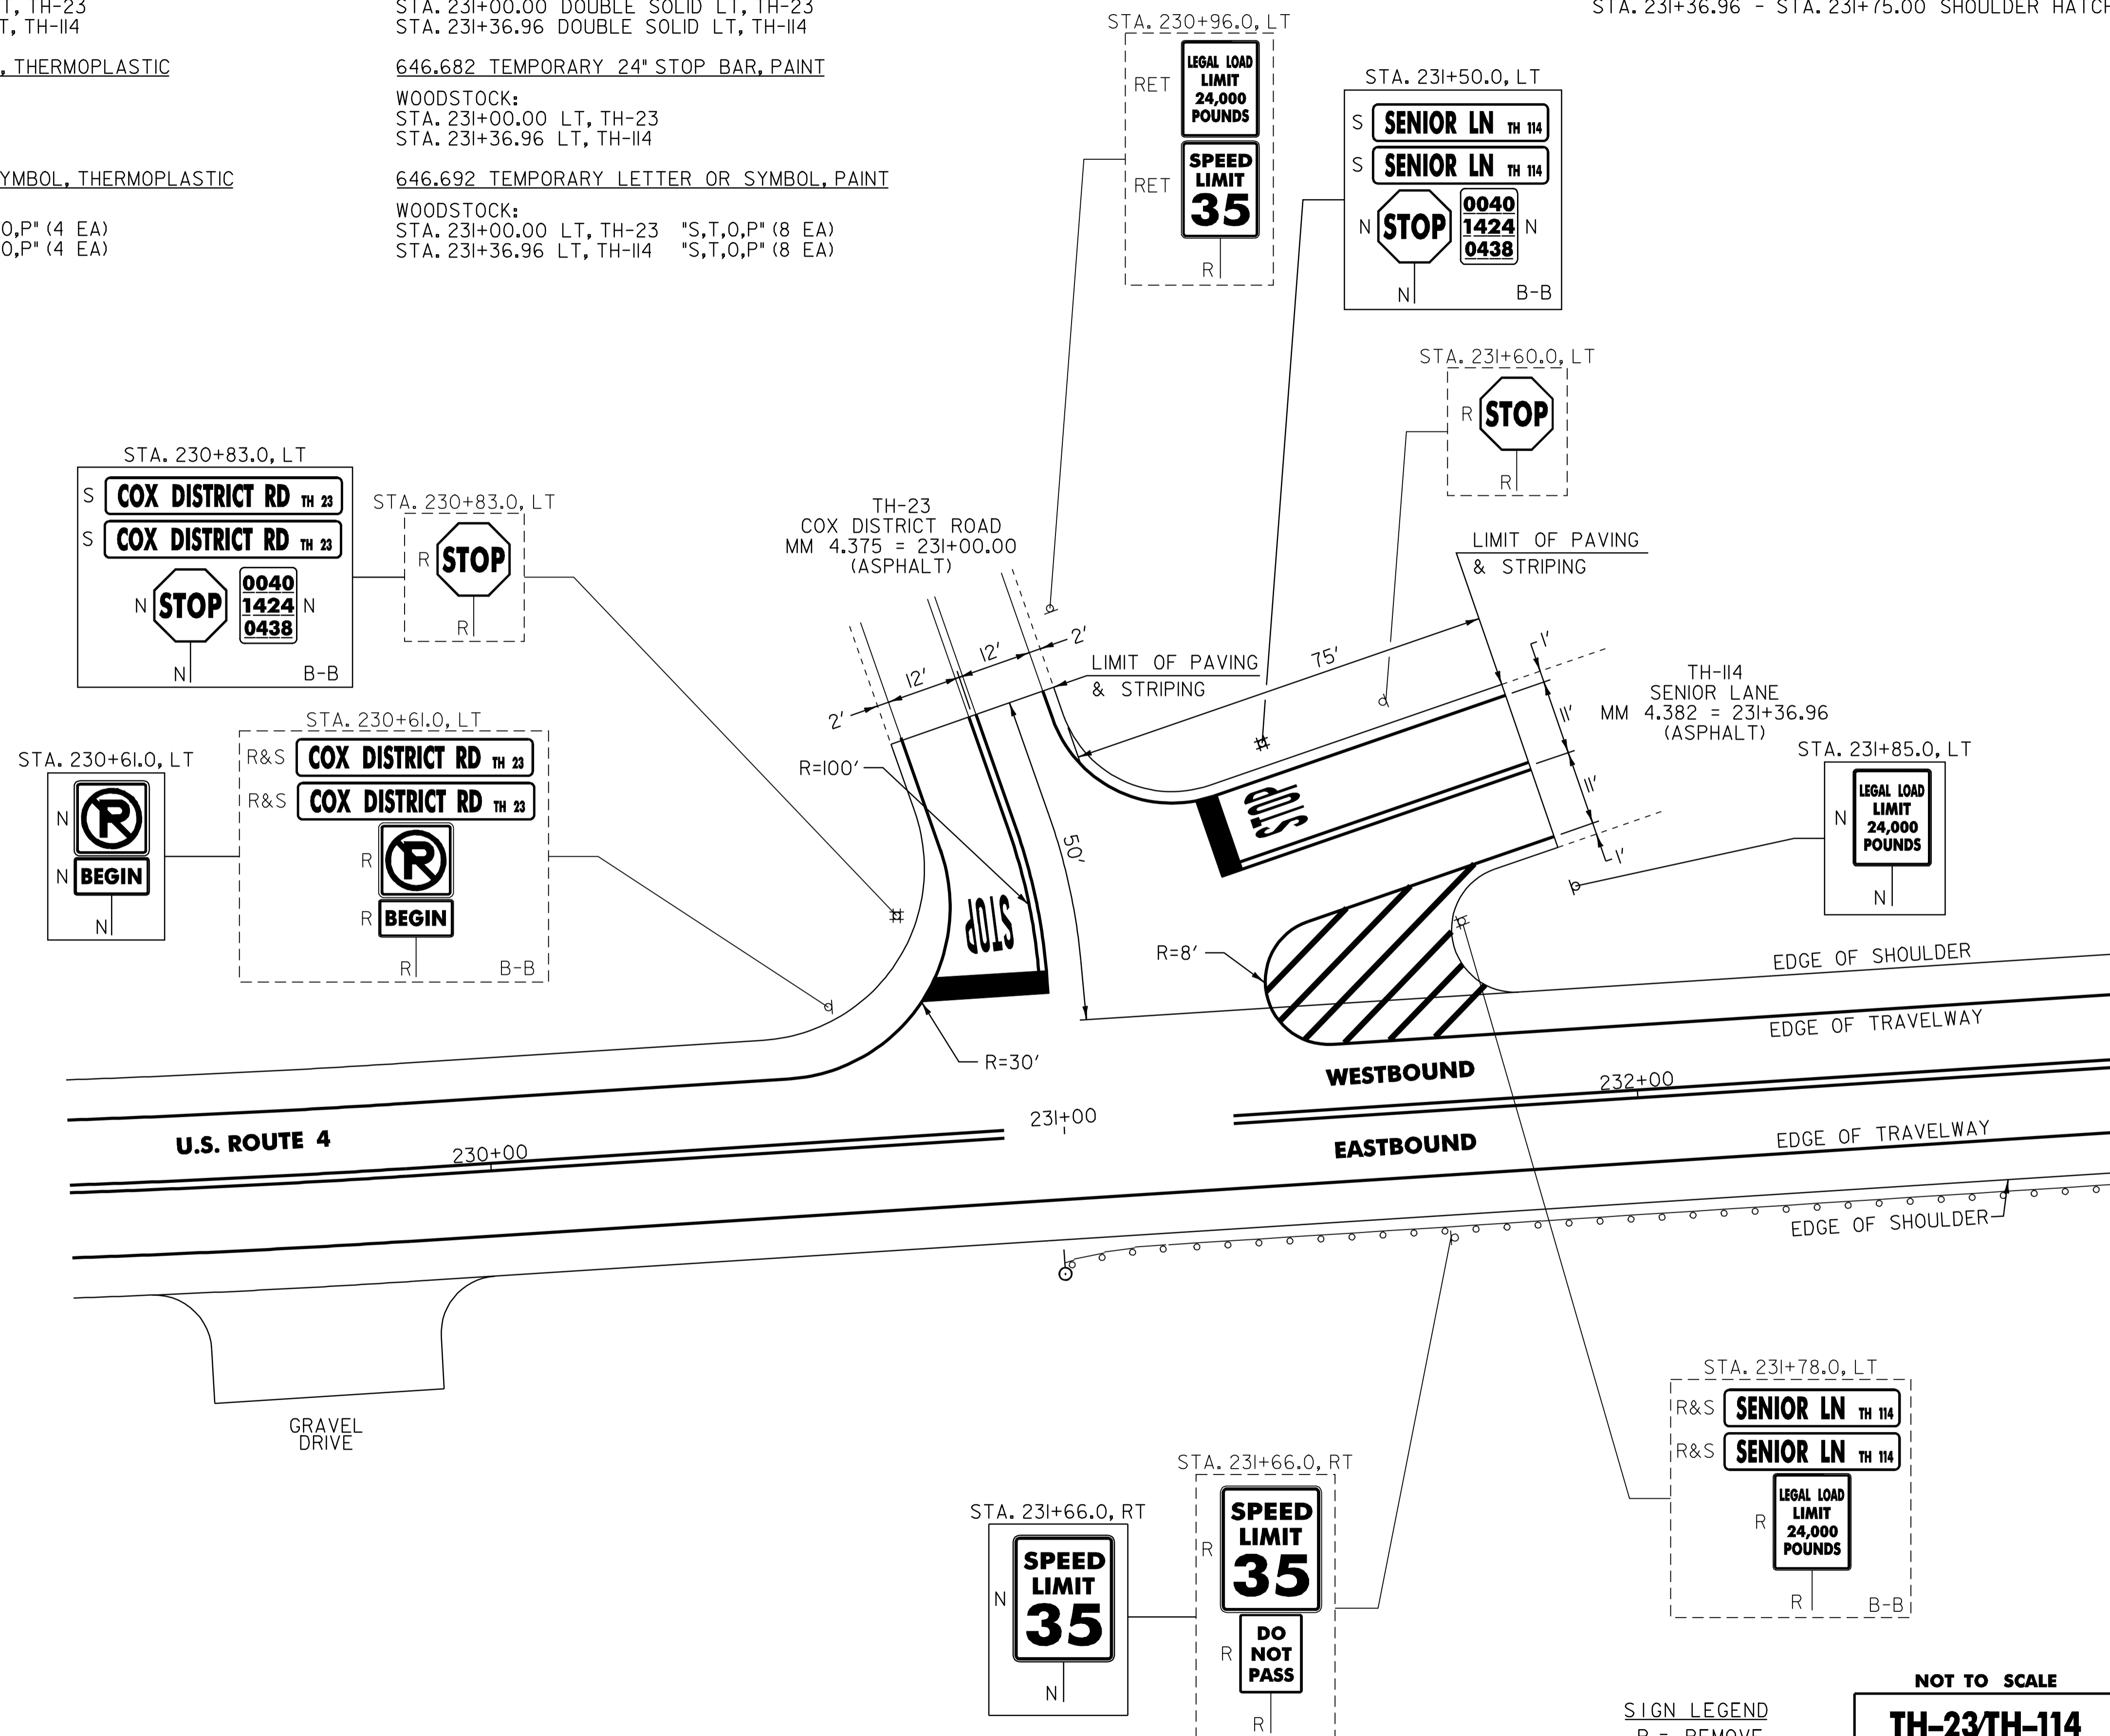

NOTE:  
 I. PAVING LIMIT ON ALL TOWN HIGHWAYS SHALL BE MEASURED 25 FT BACK FROM U.S. ROUTE 4 EDGE OF SHOULDER UNLESS DENOTED OTHERWISE ON THE PLANS OR AS DIRECTED BY THE RESIDENT ENGINEER.

SIGN LEGEND  
 R = REMOVE  
 S = SALVAGE  
 N = NEW  
 RET = RETAIN  
 B-B = BACK TO BACK  
 EXISTING = - - - - -  
 NEW = \_\_\_\_\_

<b>TH-23/TH-114 INTERSECTION DETAIL SHEET</b>	NOT TO SCALE	
	PROJECT NAME: BRIDGEWATER - WOODSTOCK	PROJECT NUMBER: NH_2611(S)
	FILE NAME: p06b160.dgn	PLOT DATE: 28-MAY-2010
	DESIGNED BY: D.W.E.	CHECKED BY: D.E.G.
	IPARM FILE: p05b036int01.i	SHEET 37 OF 80