

TEMPORARY 4" WHITE LINE, PAINT
 DURABLE 4" WHITE LINE, THERMOPLASTIC
 35+00 TO 40+90 SOLID LT
 35+00 TO 45+00 SOLID RT
 40+90 TO 40+91 SOLID LT (TH 84)
 41+07 TO 41+66 SOLID LT (TH 84)
 41+66 TO 45+00 SOLID LT

TEMPORARY 4" YELLOW LINE, PAINT
 DURABLE 4" YELLOW LINE, THERMOPLASTIC
 35+00 TO 41+01 SOLID LT & RT
 41+13 DOUBLE SOLID LT (TH 84)
 41+41 TO 45+00 SOLID LT & RT

TEMPORARY LETTER OR SYMBOL, PAINT
 DURABLE LETTER OR SYMBOL, THERMOPLASTIC
 41+03 LT - "STOP" (TH 84)

TEMPORARY 24" STOP BAR, PAINT
 DURABLE 24" STOP BAR, THERMOPLASTIC
 41+00 TO 41+12 LT (TH 84)


REMOVAL AND DISPOSAL OF GUARDRAIL
 35+00.0 TO 37+27.0 RT
 36+05.0 TO 37+80.0 LT

STEEL BEAM GUARDRAIL, GALVANIZED
 35+00.0 TO 36+90.0 RT
 36+42.5 TO 37+42.5 LT

MANUFACTURED TERMINAL SECTION, FLARED
 DELINEATOR WITH STEEL POST
 36+05.0 LT
 37+27.5 RT
 37+80.0 LT

REMOVING SIGNS
 AS SHOWN - 7

ERECTING SALVAGED SIGNS
 AS SHOWN - 1

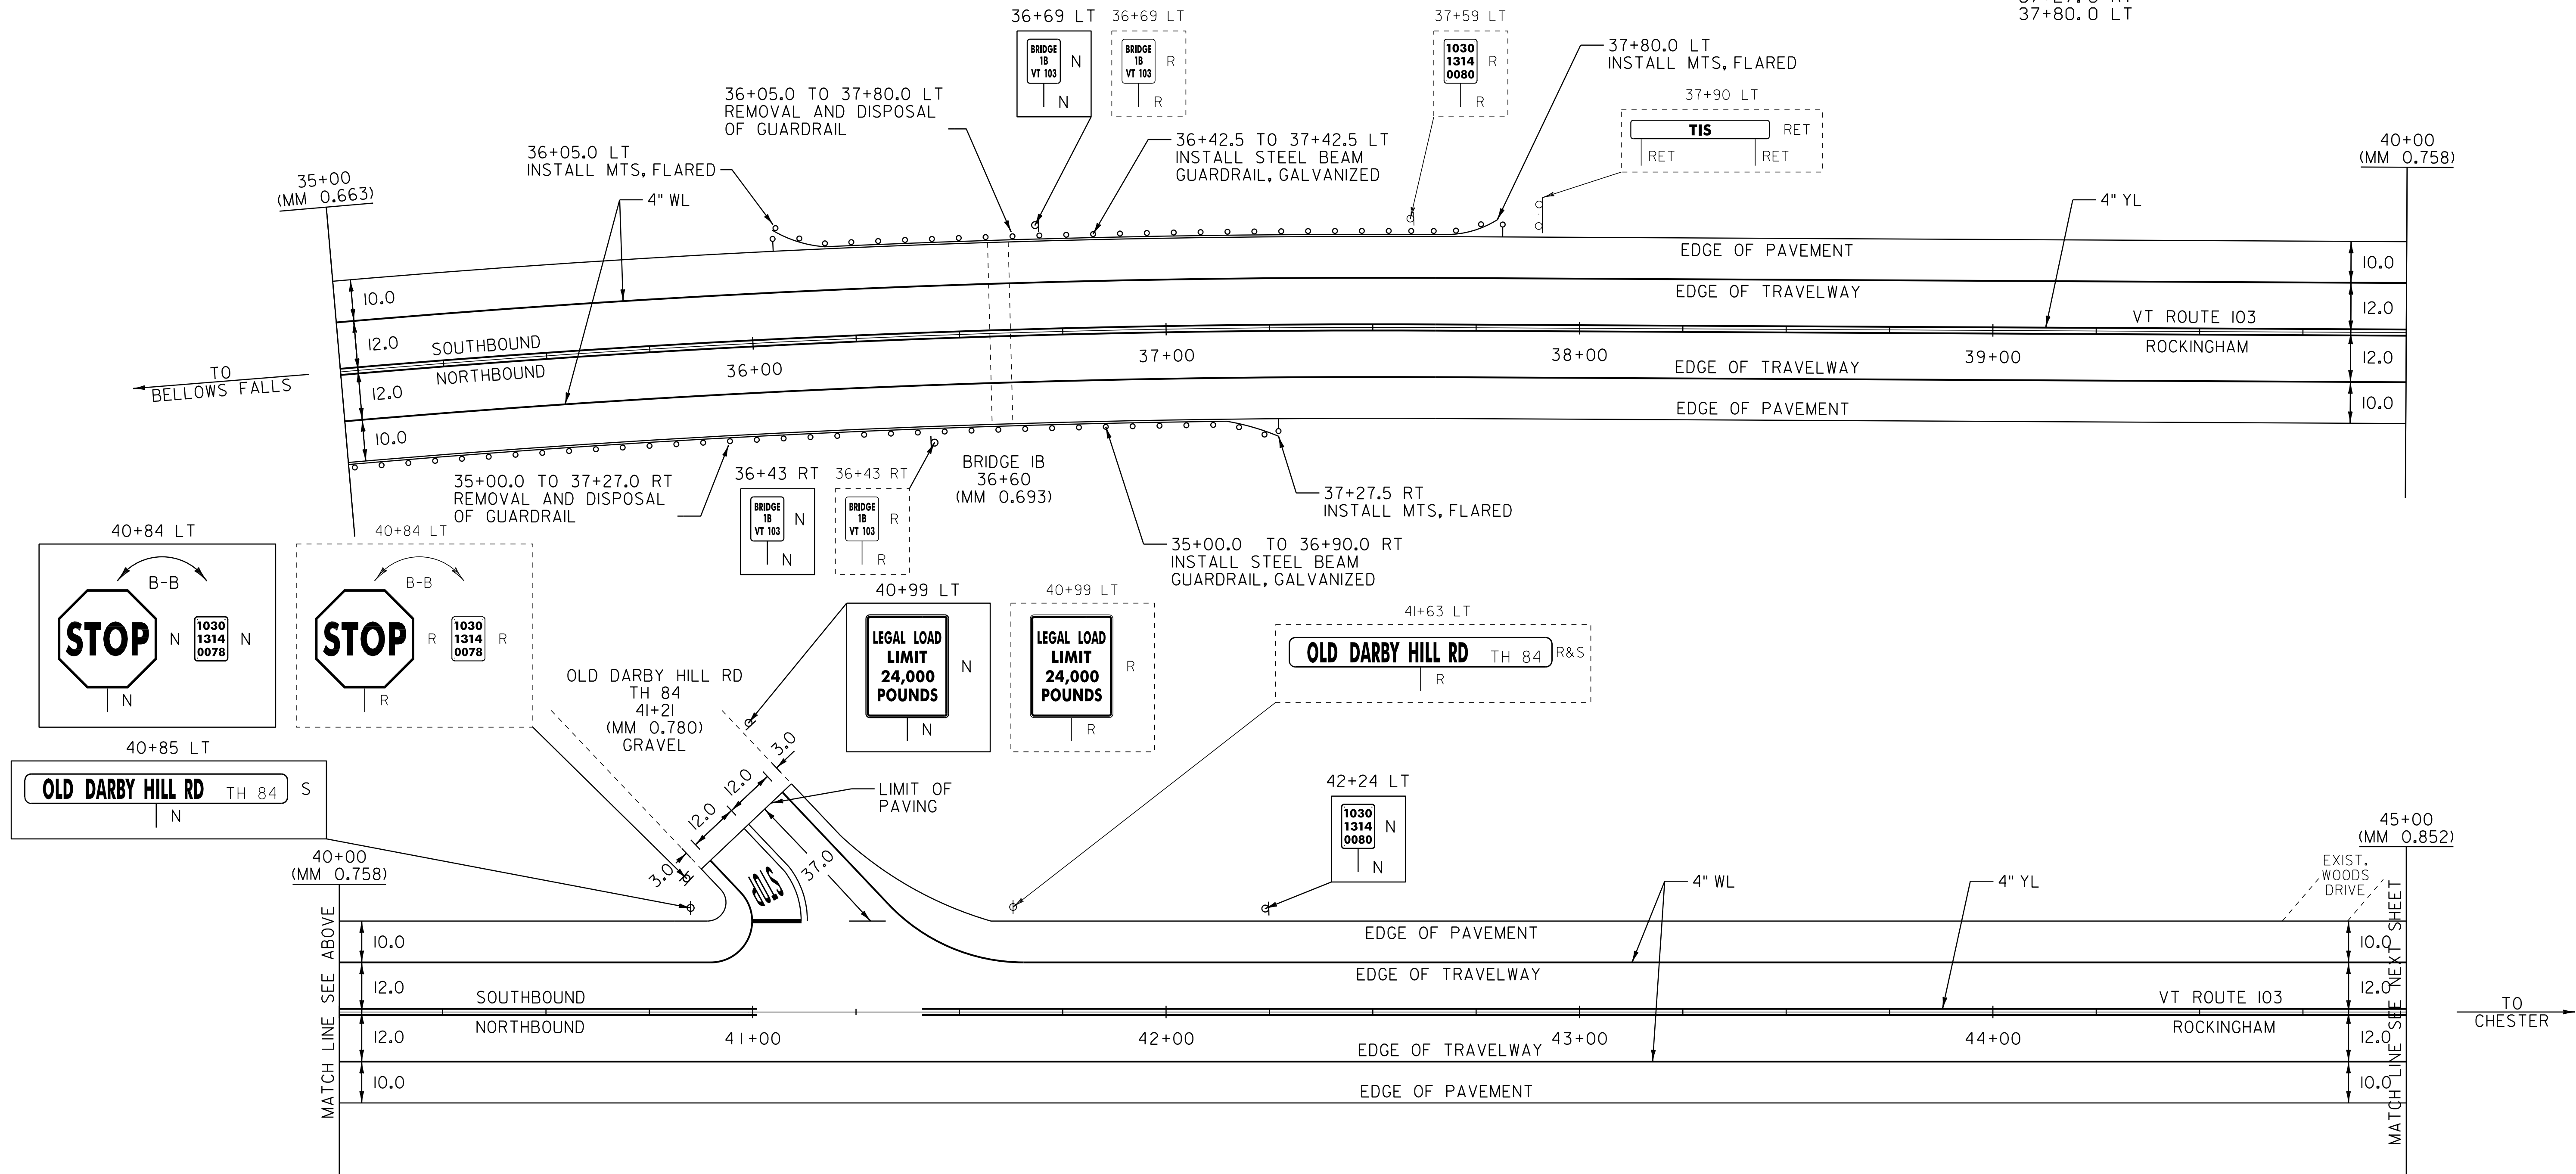

LEGEND

- R = REMOVE EXISTING
- S = SALVAGE
- R&S = REMOVE AND SALVAGE
- N = NEW
- RET = RETAIN
- B-B = BACK TO BACK
- = EXISTING GUARDRAIL
- = PROPOSED GUARDRAIL
- YL = YELLOW LINE
- WL = WHITE LINE
- ⊙ = TYPE I DELINEATOR, WHITE

PAVING LAYOUT 8

PROJECT NAME: ROCKINGHAM-CHESTER
 PROJECT NUMBER: NH 2628(I)

FILE NAME: 06B224
 PROJECT LEADER: PTS
 DESIGNED BY: NLL
 IPARM FILE NAME: pb2241a08.i

PLOT DATE: 31-AUG-2012 14:01
 DRAWN BY: MRS
 CHECKED BY: PTS
 SHEET 22 OF 82

NOT TO SCALE