

TEMPORARY 4" WHITE LINE, PAINT
 DURABLE 4" WHITE LINE, THERMOPLASTIC
 76+00 TO 87+00 SOLID LT
 76+00 TO 85+23 SOLID RT
 85+23 TO 85+61 SOLID RT (TH 6)
 85+95 TO 86+36 SOLID RT (TH 6)
 86+36 TO 87+00 SOLID RT

TEMPORARY 4" YELLOW LINE, PAINT
 DURABLE 4" YELLOW LINE, THERMOPLASTIC
 76+00 TO 83+90 DASHED LT, SOLID RT
 83+90 TO 85+57 SOLID LT & RT
 85+77 DOUBLE SOLID RT (TH 6)
 85+97 TO 86+50 SOLID LT & RT
 86+50 TO 87+00 SOLID LT, DASHED RT


TEMPORARY LETTER OR SYMBOL, PAINT
 DURABLE LETTER OR SYMBOL, THERMOPLASTIC
 85+88 RT - "STOP" (TH 6)
 TEMPORARY 24" STOP BAR, PAINT
 DURABLE 24" STOP BAR, THERMOPLASTIC
 85+78 TO 86+05 RT (TH 6)

REMOVAL AND DISPOSAL OF GUARDRAIL
 76+00.0 TO 81+80.0 LT
 76+00.0 TO 84+47.0 RT
 STEEL BEAM GUARDRAIL, GALVANIZED
 76+00.0 TO 84+12.5 RT
 76+17.5 TO 81+42.5 LT

REHAB. DROP INLETS, CATCH BASINS,
 OR MANHOLES, CLASS I, CLASS II OR CLASS III
 79+71 RT (DI)
 BITUMINOUS CONCRETE
 CURB, TYPE A
 76+55 TO 79+72 RT

REMOVING SIGNS
 AS SHOWN - 9
 ERECTING SALVAGED SIGNS
 AS SHOWN - 1

MANUFACTURED TERMINAL SECTION, FLARED
 DELINEATOR WITH STEEL POST
 81+80.0 LT
 84+50.0 RT

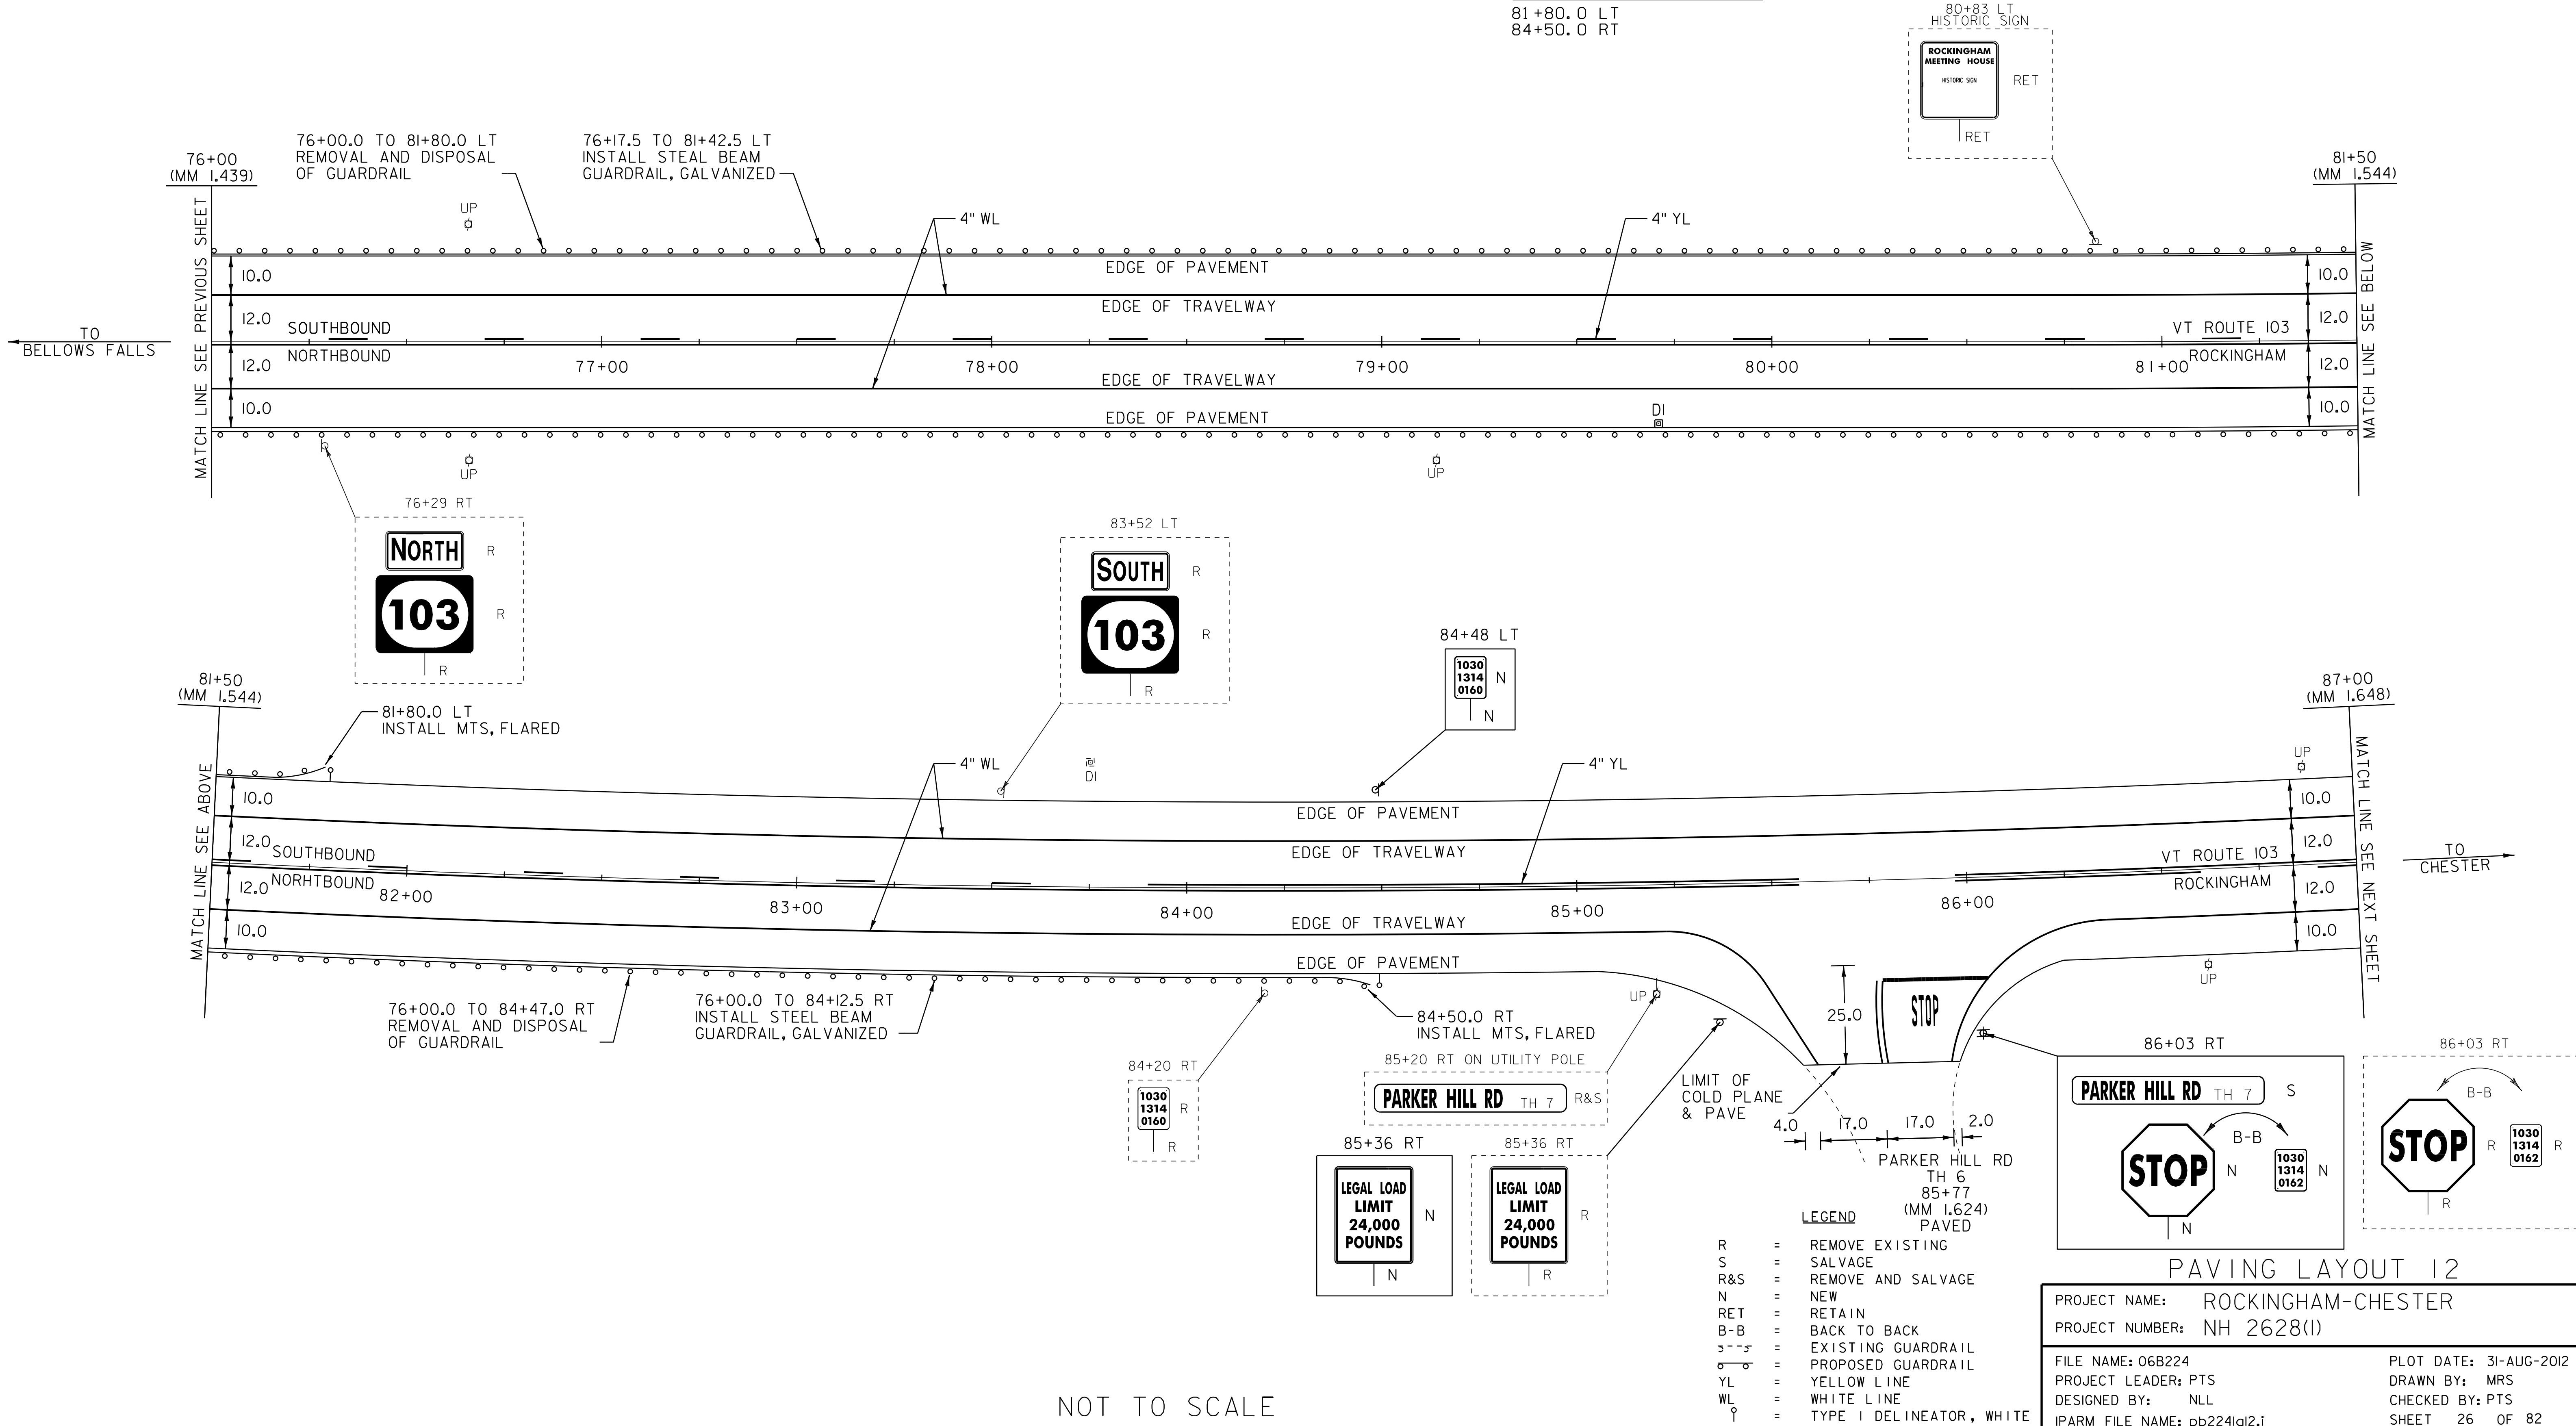

NOT TO SCALE

- LEGEND**
- R = REMOVE EXISTING
 - S = SALVAGE
 - R&S = REMOVE AND SALVAGE
 - N = NEW
 - RET = RETAIN
 - B-B = BACK TO BACK
 - = EXISTING GUARDRAIL
 - = PROPOSED GUARDRAIL
 - YL = YELLOW LINE
 - WL = WHITE LINE
 - ⊙ = TYPE I DELINEATOR, WHITE

PAVING LAYOUT 12

PROJECT NAME: ROCKINGHAM-CHESTER
 PROJECT NUMBER: NH 2628(I)

FILE NAME: 06B224
 PROJECT LEADER: PTS
 DESIGNED BY: NLL
 IPARM FILE NAME: pb224l02.i

PLOT DATE: 31-AUG-2012 14:02
 DRAWN BY: MRS
 CHECKED BY: PTS
 SHEET 26 OF 82