

646.602 TEMPORARY 4" WHITE LINE, PAINT
 646.402 DURABLE 4" WHITE LINE, THERMOPLASTIC OR
 646.403 DURABLE 4" WHITE LINE, EPOXY PAINT OR
 646.404 DURABLE 4" WHITE LINE, POLYUREA.

167+00 TO 168+87 SOLID LT
 167+00 TO 172+50 SOLID RT
 169+67 TO 172+50 SOLID LT

646.612 TEMPORARY 4" YELLOW LINE, PAINT
 646.412 DURABLE 4" YELLOW LINE, THERMOPLASTIC OR
 646.413 DURABLE 4" YELLOW LINE, EPOXY PAINT OR
 646.414 DURABLE 4" YELLOW LINE, POLYUREA.

162+00 TO 169+07 SOLID LT & RT
 169+47 TO 171+34 SOLID LT & RT
 171+34 TO 172+50 SOLID LT, DASHED RT


621.50 MANUFACTURED
 TERMINAL SECTION, FLARED
 171+77 TO 172+14.5 RT

621.80 REMOVAL AND DISPOSAL OF GUARDRAIL
 171+77 TO 172+14.5 RT

900.620 SPECIAL PROVISION
 (DELINEATOR WITH STEEL POST)
 171+77 RT

675.50 REMOVING SIGNS
 AS SHOWN - 5

675.60 ERECTING SALVAGED SIGNS
 AS SHOWN - 2

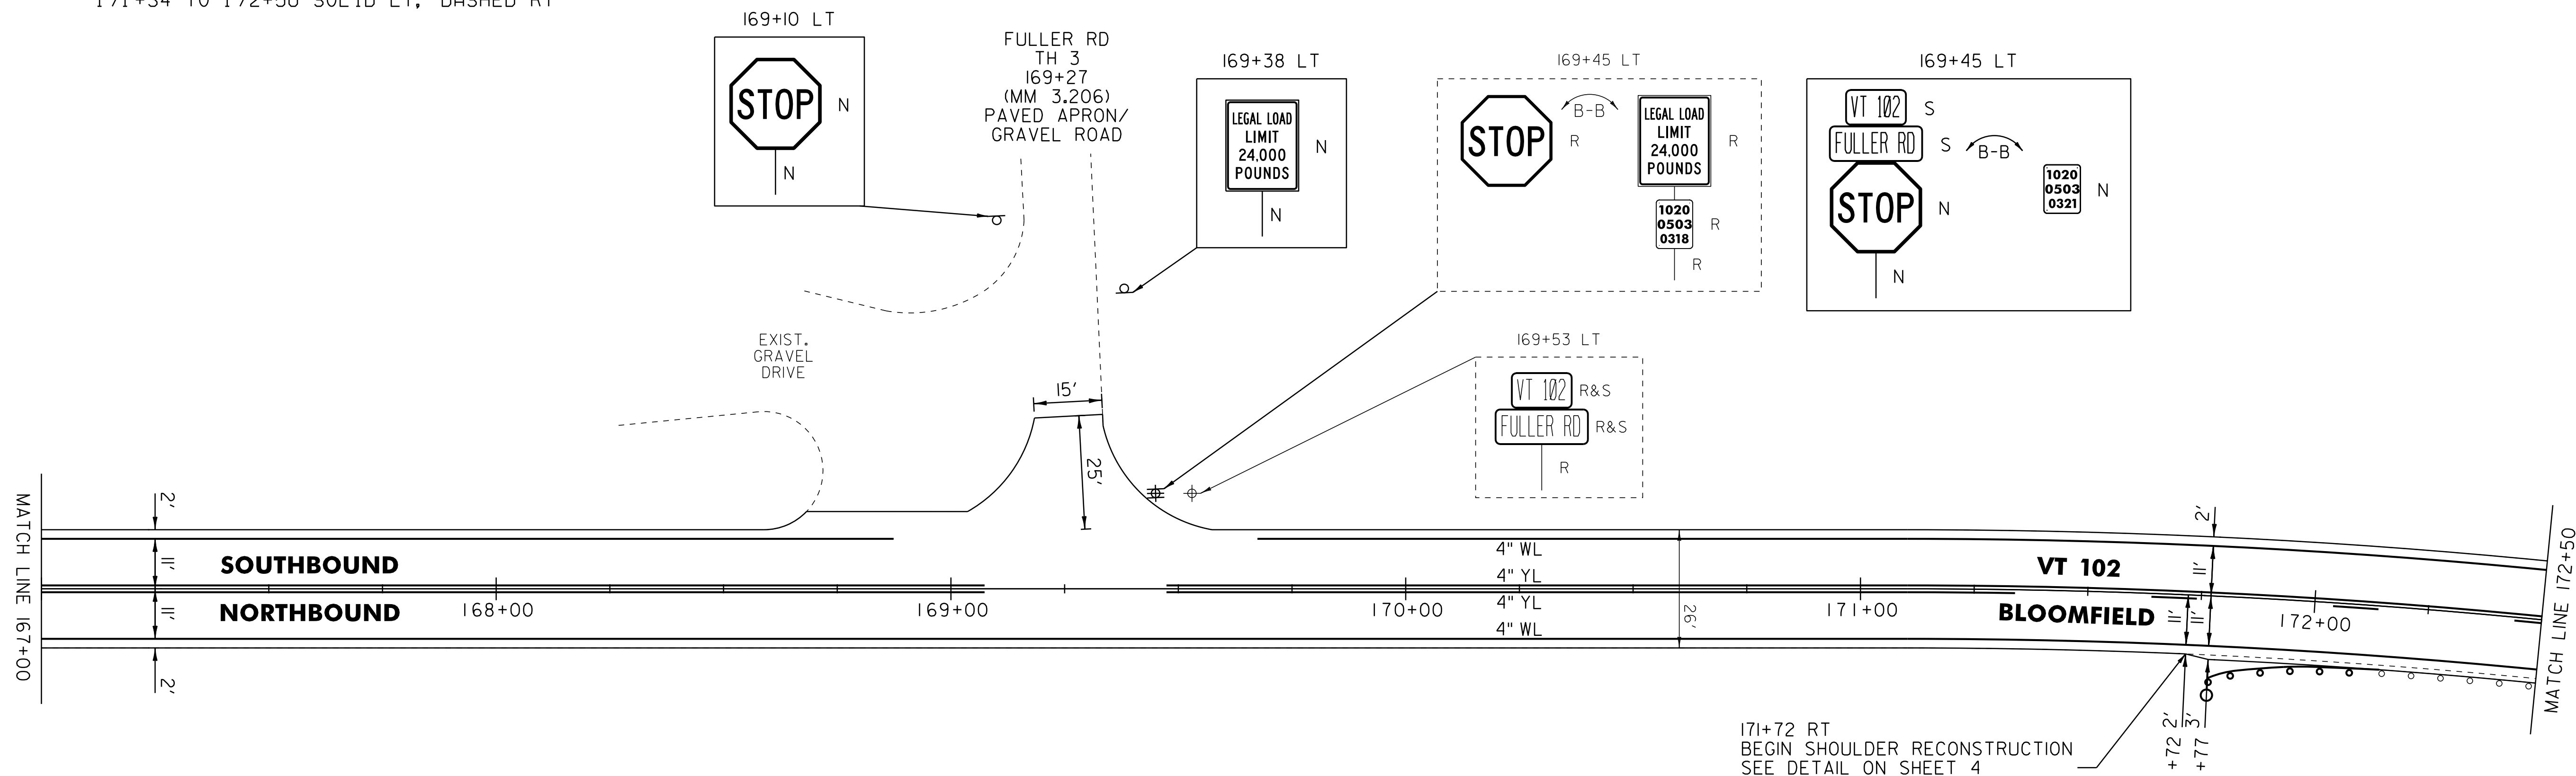

NOT TO SCALE

LEGEND

R	=	REMOVE EXISTING
S	=	SALVAGE
R&S	=	REMOVE AND SALVAGE
N	=	NEW
RET	=	RETAIN
B-B	=	BACK TO BACK
—○—	=	EXISTING GUARDRAIL
—○—	=	PROPOSED GUARDRAIL
YL	=	YELLOW LINE
WL	=	WHITE LINE
—○—	=	DELINEATOR

ROADWAY LAYOUT 16

PROJECT NAME: BLOOMFIELD-LEMINGTON	
PROJECT NUMBER: STP 2610(I)	
FILE NAME: /pave/06c052/pc052	PLOT DATE: 19-JUN-2013 16:59
PROJECT LEADER: PTS	DRAWN BY: SNG
DESIGNED BY: NLL	CHECKED BY: PTS
IPARM FILE NAME: 06C052_30	SHEET 30 OF 82