

646.602 TEMPORARY 4" WHITE LINE, PAINT  
 646.402 DURABLE 4" WHITE LINE, THERMOPLASTIC OR  
 646.403 DURABLE 4" WHITE LINE, EPOXY PAINT OR  
 646.404 DURABLE 4" WHITE LINE, POLYUREA.

L127+00 TO L132+50 SOLID RT  
 L127+00 TO L129+97 SOLID LT  
 L129+97 TO L130+28 SOLID LT ( TH 4)  
 L130+71 TO L130+92 SOLID LT ( TH 4)  
 L130+92 TO L132+50 SOLID LT

646.612 TEMPORARY 4" YELLOW LINE, PAINT  
 646.412 DURABLE 4" YELLOW LINE, THERMOPLASTIC OR  
 646.413 DURABLE 4" YELLOW LINE, EPOXY PAINT OR  
 646.414 DURABLE 4" YELLOW LINE, POLYUREA.

L127+00 TO L130+25 SOLID LT & RT  
 L130+47 TO L130+51 DOUBLE SOLID LT ( TH 4)  
 L130+66 TO L132+50 SOLID LT & RT

646.682 TEMPORARY 24" STOP BAR, PAINT  
 646.482 DURABLE 24" STOP BAR, THERMOPLASTIC OR  
 646.483 DURABLE 24" STOP BAR, EPOXY PAINT OR  
 646.484 DURABLE 24" STOP BAR, POLYUREA.

L130+09 TO L130+47 LT


646.692 TEMPORARY LETTER OR SYMBOL, PAINT  
 646.492 DURABLE LETTER OR SYMBOL, THERMOPLASTIC OR  
 646.493 DURABLE LETTER OR SYMBOL, EPOXY PAINT OR  
 646.494 DURABLE LETTER OR SYMBOL, POLYUREA.  
 L130+33 LT - " STOP"

201.31 THINNING AND TRIMMING FOR SIGNS

L130+17 LT

675.50 REMOVING SIGNS

AS SHOWN - 4

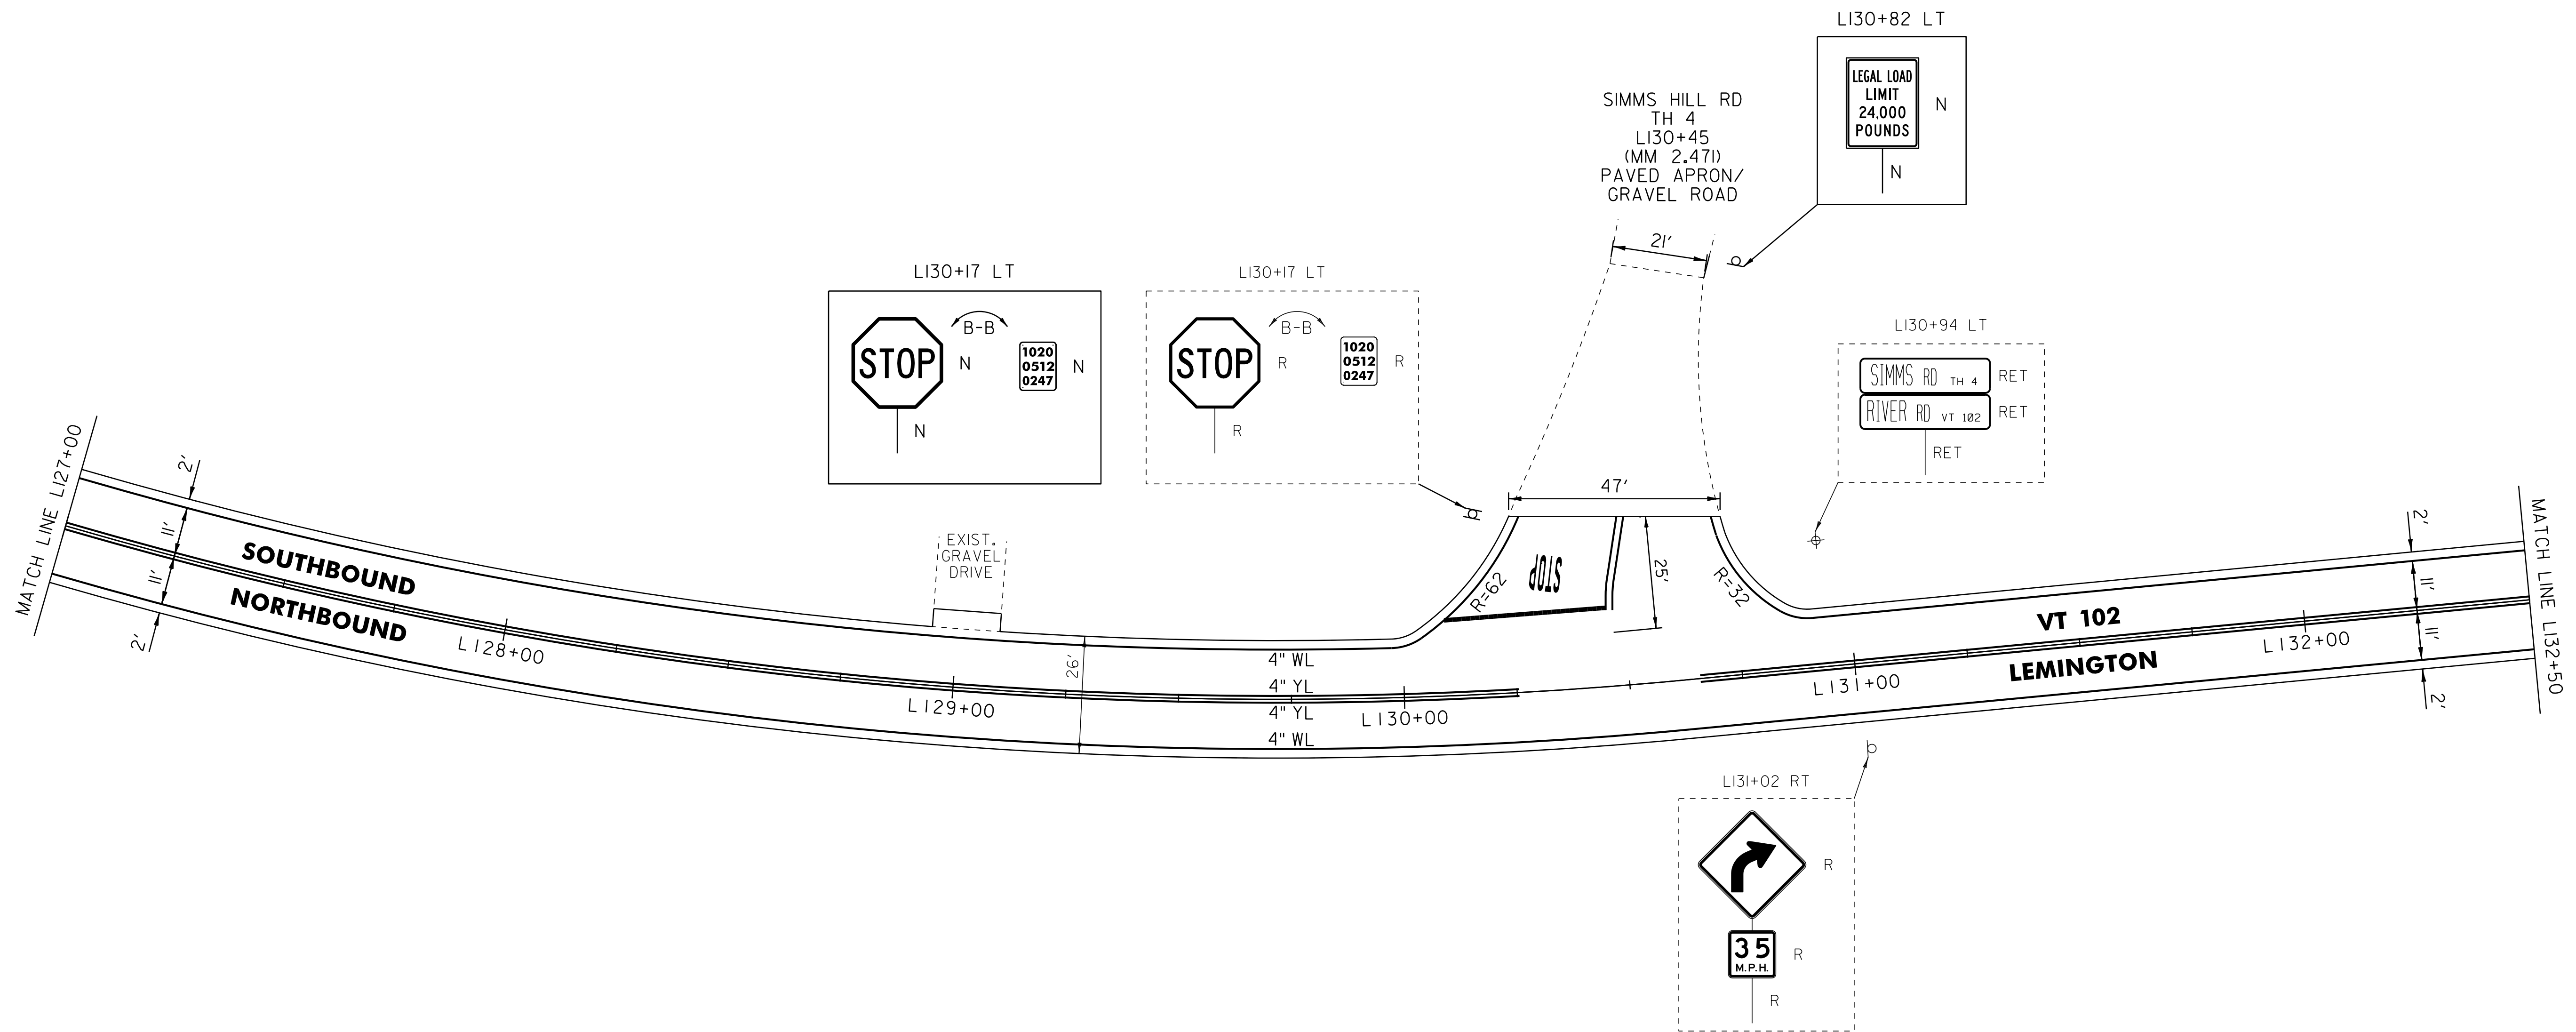

NOT TO SCALE

LEGEND

- R = REMOVE EXISTING
- S = SALVAGE
- R&S = REMOVE AND SALVAGE
- N = NEW
- RET = RETAIN
- B-B = BACK TO BACK
- = EXISTING GUARDRAIL
- = PROPOSED GUARDRAIL
- YL = YELLOW LINE
- WL = WHITE LINE
- = DELINEATOR

ROADWAY LAYOUT 49

PROJECT NAME: BLOOMFIELD-LEMINGTON

PROJECT NUMBER: STP 2610(I)

FILE NAME: /pave/06c052/pc052

PROJECT LEADER: PTS

DESIGNED BY: NULL

IPARM FILE NAME: 06C052.63

PLOT DATE: 19-JUN-2013 17:00

DRAWN BY: SNG

CHECKED BY: PTS

SHEET 63 OF 82