LOCATION				FEET OF DITCHING				MISC. ITEMS					REMARKS
				PERCENT GRADE				613.10	613.11	649.31	651.15	653.20	
SITE	STATION	STATION	POS.	0-1	1-2.5	2.5-10	>10	STONE FILL, TYPE I	STONE FILL, TYPE II	GEOT. UNDER STONE FILL	SEED	TEMP. EROS. MATT.	
VT. ROUTE 125								CY	CY	SY	LB	SY	
MIDDLEBURY:													
1	60+90	64+70	RT		380						3	169	
2	75+00	83+00	LT		800						6	356	
3	141+00	154+10	RT			1310		194		873			
4	191+40	216+85	RT				2545		377	1697			
ROUNDINGS					-	-	-	6	23	30	-	-	
TOTALS					1180	1310	2545	200	400	2600	9	525	

LOCATION				FEET OF DITCHING				MISC. ITEMS					REMARKS
				PERCENT GRADE				613.10	613.11	649.31	651.15	653.20	
SITE	STATION	STATION	POS.	0-1	1-2.5	2.5-10	>10	STONE FILL, TYPE I	STONE FILL, TYPE II	GEOT. UNDER STONE FILL	SEED	TEMP. EROS. MATT.	
								CY	CY	SY	LB	SY	

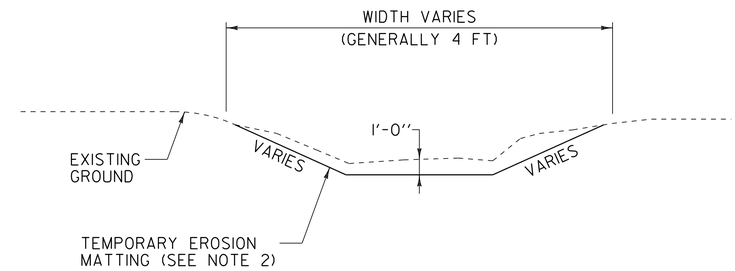

DITCH DETAIL

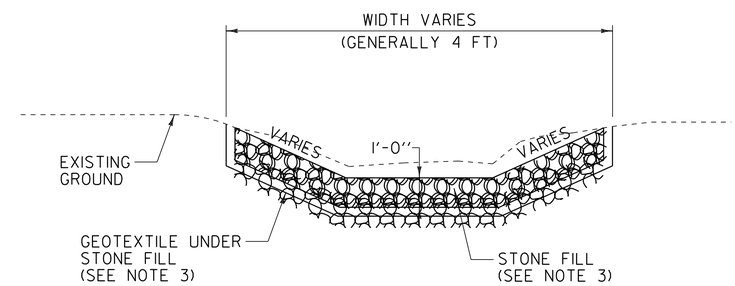

STONE DITCH DETAIL

NOTES:

1. PIPE INLET AND OUTLET AREAS AND DITCH CLEANING THROUGHOUT THE PROJECT SHALL BE PERFORMED AT LOCATIONS IDENTIFIED ON THIS SHEET AND AS DIRECTED BY THE RESIDENT ENGINEER. PAYMENT WILL BE UNDER THE APPLICABLE EQUIPMENT RENTAL ITEM(S).
2. ESTIMATED QUANTITIES OF TEMPORARY EROSION MATTING AND SEED HAVE BEEN INCLUDED AS NEEDED OR AS DIRECTED BY THE RESIDENT ENGINEER.
3. ESTIMATED QUANTITIES OF STONE FILL TYPE I, STONE FILL TYPE II, AND GEOTEXTILE UNDER STONE FILL HAVE BEEN INCLUDED AS NEEDED. STONE FILL TYPE I SHALL BE USED IN ALL DITCHES WITH A GRADE BETWEEN 2.5 AND 10 PERCENT AND STONE FILL TYPE II SHALL BE USED IN ALL DITCHES WITH A GRADE OVER 10 PERCENT OR AS DIRECTED BY THE RESIDENT ENGINEER.

NOT TO SCALE

DITCH CLEANING DETAIL SHEET

PROJECT NAME: MIDDLEBURY

PROJECT NUMBER: STP 2627(1)

FILE NAME: p06c222.dgn
PROJECT LEADER: D.E.G.
DESIGNED BY: M.J.L.
IPARM FILE: p06c222dcd.i

PLOT DATE: 19-SEP-2013 11:14
DRAWN BY: C.A.K.
CHECKED BY: D.W.E.
SHEET 19 OF 114