

646.406 DURABLE 4 INCH WHITE LINE, RECESSED POLYUREA
 (ALL LINES WILL INCLUDE EDGE LINE BREAKS AND RADIUS FOR TOWN HIGHWAYS)
 CORNWALL:
 STA 5+00.00 - STA 34+00.00 EDGE LINE LT & RT

646.416 DURABLE 4 INCH YELLOW LINE, RECESSED POLYUREA
 (ALL LINES WILL INCLUDE C/L BREAKS FOR TOWN HIGHWAYS) S=SOLID, D=DASHED
 CORNWALL:
 STA 5+00.00 - STA 26+90.00 LT @ RT
 STA 26+90.00 - STA 34+00.00 S - S
 STA 19+69.44 DOUBLE SOLID LT, TH-25
 STA 23+49.60 DOUBLE SOLID RT, TH-3

646.602 TEMPORARY 4 INCH WHITE LINE, PAINT
 (ALL LINES WILL INCLUDE EDGE LINE BREAKS AND RADIUS FOR TOWN HIGHWAYS)
 CORNWALL:
 STA 5+00.00 - STA 34+00.00 EDGE LINE LT & RT

646.612 TEMPORARY 4 INCH YELLOW LINE, PAINT
 (ALL LINES WILL INCLUDE C/L BREAKS FOR TOWN HIGHWAYS) S=SOLID, D=DASHED
 CORNWALL:
 STA 5+00.00 - STA 26+90.00 LT @ RT
 STA 26+90.00 - STA 34+00.00 S - S
 STA 19+69.44 DOUBLE SOLID LT, TH-25
 STA 23+49.60 DOUBLE SOLID RT, TH-3


646.481 DURABLE 24 INCH STOP BAR, TYPE 1 TAPE
 CORNWALL:
 STA 19+69.44 LT, TH-25
 STA 23+49.60 RT, TH-3

646.682 TEMPORARY 24 INCH STOP BAR, PAINT
 CORNWALL:
 STA 23+49.60 RT, TH-3

646.491 DURABLE LETTER OR SYMBOL, TYPE 1 TAPE
 CORNWALL:
 STA 19+69.44 LT, TH-25 "S,T,O,P" (4 EA)
 STA 23+49.60 RT, TH-3 "S,T,O,P" (4 EA)

646.692 TEMPORARY LETTER OR SYMBOL, PAINT
 CORNWALL:
 STA 23+49.60 RT, TH-3 "S,T,O,P" (4 EA)

675.50 REMOVING SIGNS AS SHOWN - 1

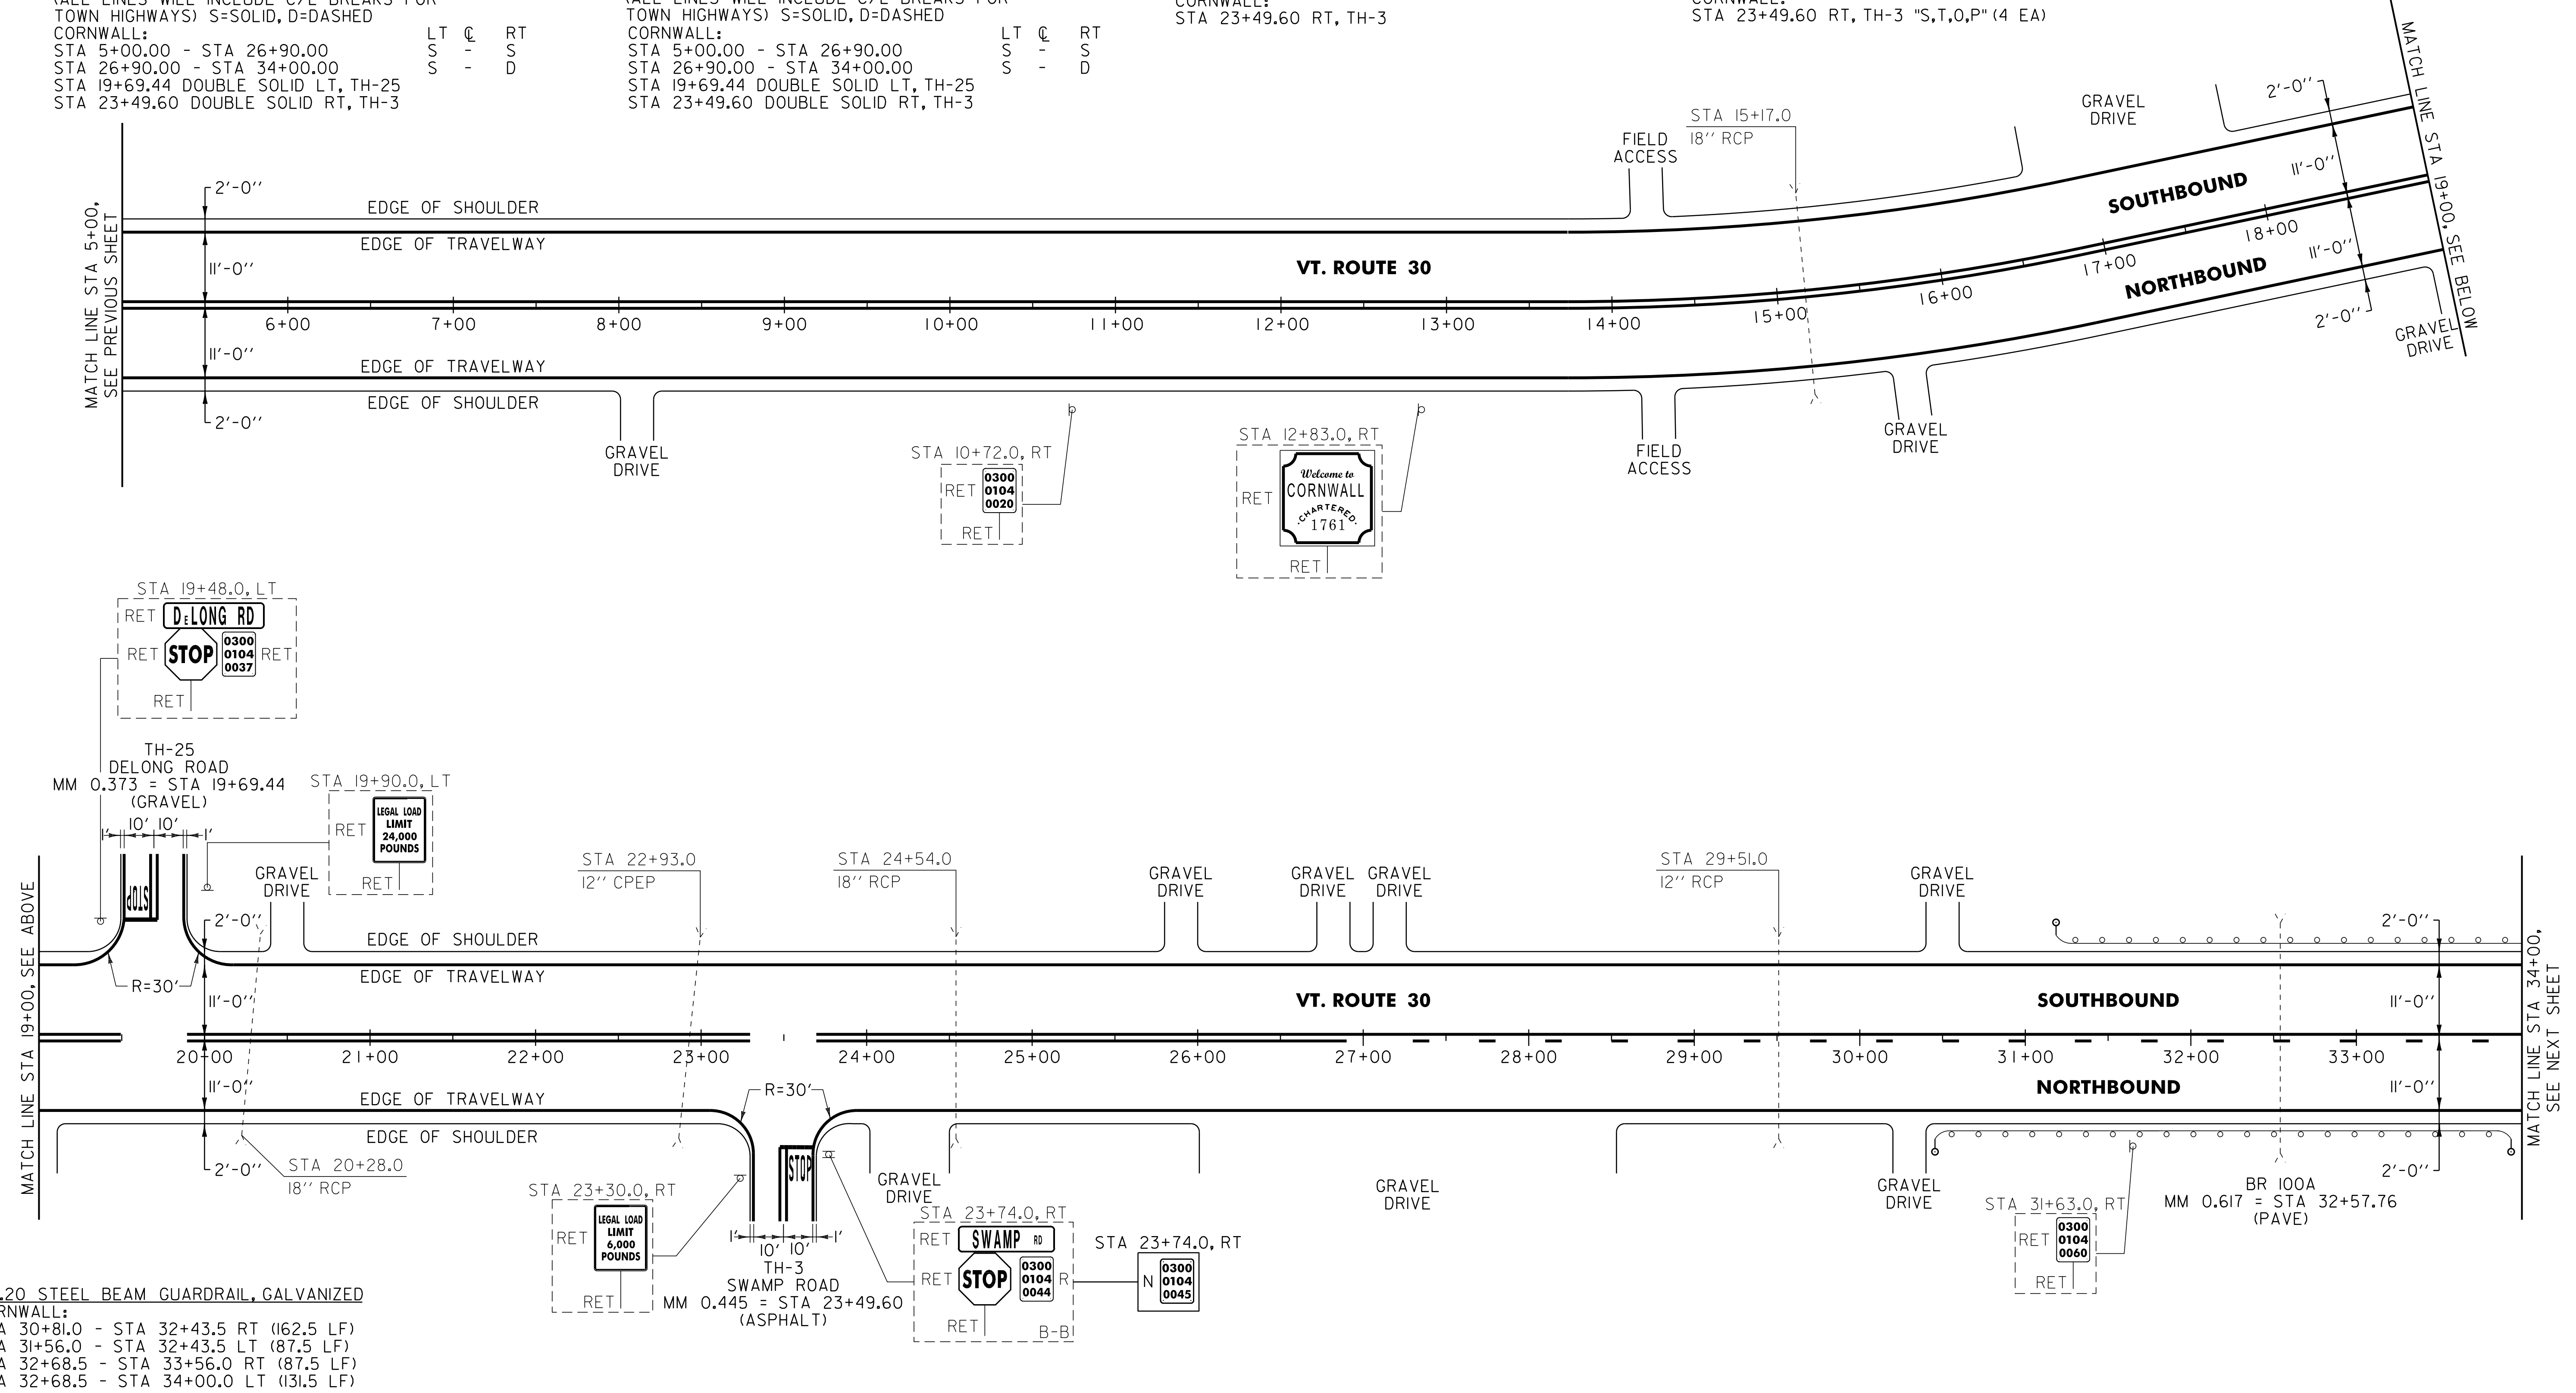

621.20 STEEL BEAM GUARDRAIL, GALVANIZED
 CORNWALL:
 STA 30+81.0 - STA 32+43.5 RT (162.5 LF)
 STA 31+56.0 - STA 32+43.5 LT (87.5 LF)
 STA 32+68.5 - STA 33+56.0 RT (87.5 LF)
 STA 32+68.5 - STA 34+00.0 LT (131.5 LF)

621.216 HD STEEL BEAM GUARDRAIL, GALVANIZED NESTED
 CORNWALL:
 STA 32+43.5 - STA 32+68.5 RT (25.0 LF)
 STA 32+43.5 - STA 32+68.5 LT (25.0 LF)

621.50 MANUFACTURED TERMINAL SECTION, FLARED
 CORNWALL:
 STA 30+43.5 - STA 30+81.0 RT
 STA 31+18.5 - STA 31+56.0 LT
 STA 33+56.0 - STA 33+93.5 RT

621.80 REMOVAL AND DISPOSAL OF GUARDRAIL
 CORNWALL:
 STA 31+61.0 - STA 33+26.0 RT (165.0 LF)
 STA 31+84.0 - STA 33+11.0 LT (127.0 LF)

676.10 DELINEATOR WITH STEEL POST
 CORNWALL:
 STA 30+43.5 RT
 STA 31+18.5 LT
 STA 33+93.5 RT

NOTE:
 1. PAVING LIMIT ON ALL TOWN HIGHWAYS SHALL BE MEASURED 25 FT BACK FROM VT. ROUTE 30 EDGE OF SHOULDER UNLESS DENOTED OTHERWISE ON THE PLANS OR AS DIRECTED BY THE RESIDENT ENGINEER.

SIGN LEGEND
 R = REMOVE
 S = SALVAGE
 N = NEW
 RET = RETAIN
 B-B = BACK TO BACK
 EXISTING = - - - - -
 NEW = _____

NOT TO SCALE

PROJECT LAYOUT SHEET #10	PROJECT NAME: WHITING - MIDDLEBURY	PLOT DATE: 30-MAR-2012 14:13
	PROJECT NUMBER: STP 2629(II)	DRAWN BY: C.A.K.
	FILE NAME: p06c226.dgn	CHECKED BY: D.E.G.
	PROJECT LEADER: D.E.G.	SHEET 26 OF 133

DWG. NO. p06c226(II).1