

646.402 DURABLE 4 INCH WHITE LINE, THERMOPLASTIC
 (ALL LINES WILL INCLUDE EDGE LINE BREAKS AND
 RADIUS FOR TOWN HIGHWAYS)

U.S. ROUTE 7:
 STA 30+00.00 - STA 30+65.00 DASHED LANE LINE LT
 STA 30+00.00 - STA 30+64.00 SOLID LANE LINE C/L
 STA 30+00.00 - STA 30+64.00 SOLID LANE LINE RT
 STA 30+00.00 - STA 30+64.00 DASHED LANE LINE RT
 STA 30+00.00 - STA 31+00.00 EDGE LINE LT/RT

646.412 DURABLE 4 INCH YELLOW LINE, THERMOPLASTIC
 (ALL LINES WILL INCLUDE C/L BREAKS FOR
 TOWN HIGHWAYS)

U.S. ROUTE 7:
 STA 30+00.00 - STA 30+65.00 DOUBLE SOLID LT

646.481 DURABLE 24 INCH STOP BAR, TYPE I TAPE

U.S. ROUTE 7:
 STA 30+65.00 LT/RT

646.491 DURABLE LETTER OR SYMBOL, TYPE I TAPE

U.S. ROUTE 7:
 STA 30+55.75 LT, ARROW (1EA)
 STA 30+55.75 RT, ARROW (1EA)

646.511 DURABLE RAILROAD CROSSING SYMBOL, TYPE I TAPE

U.S. ROUTE 7:
 STA 30+20.00 LT (1EA)
 STA 30+20.00 LT (1EA)

646.612 TEMPORARY 4 INCH YELLOW LINE, PAINT
 (ALL LINES WILL INCLUDE C/L BREAKS FOR
 TOWN HIGHWAYS)

U.S. ROUTE 7:
 STA 30+00.00 - STA 30+65.00 DOUBLE SOLID LT

646.602 TEMPORARY 4 INCH WHITE LINE, PAINT
 (ALL LINES WILL INCLUDE EDGE LINE BREAKS AND
 RADIUS FOR TOWN HIGHWAYS)

U.S. ROUTE 7:
 STA 30+00.00 - STA 30+65.00 DASHED LANE LINE LT
 STA 30+00.00 - STA 30+64.00 SOLID LANE LINE C/L
 STA 30+00.00 - STA 30+64.00 SOLID LANE LINE RT
 STA 30+00.00 - STA 30+64.00 DASHED LANE LINE RT
 STA 30+00.00 - STA 31+00.00 EDGE LINE LT/RT

646.682 TEMPORARY 24 INCH STOP BAR, PAINT


U.S. ROUTE 7:
 STA 30+65.00 LT/RT

646.692 TEMPORARY LETTER OR SYMBOL, PAINT

U.S. ROUTE 7:
 STA 30+55.75 LT, ARROW (2 EA)
 STA 30+55.75 RT, ARROW (2 EA)

646.712 TEMPORARY RAILROAD CROSSING SYMBOL, PAINT

U.S. ROUTE 7:
 STA 30+20.00 LT (2 EA)
 STA 30+20.00 LT (2 EA)

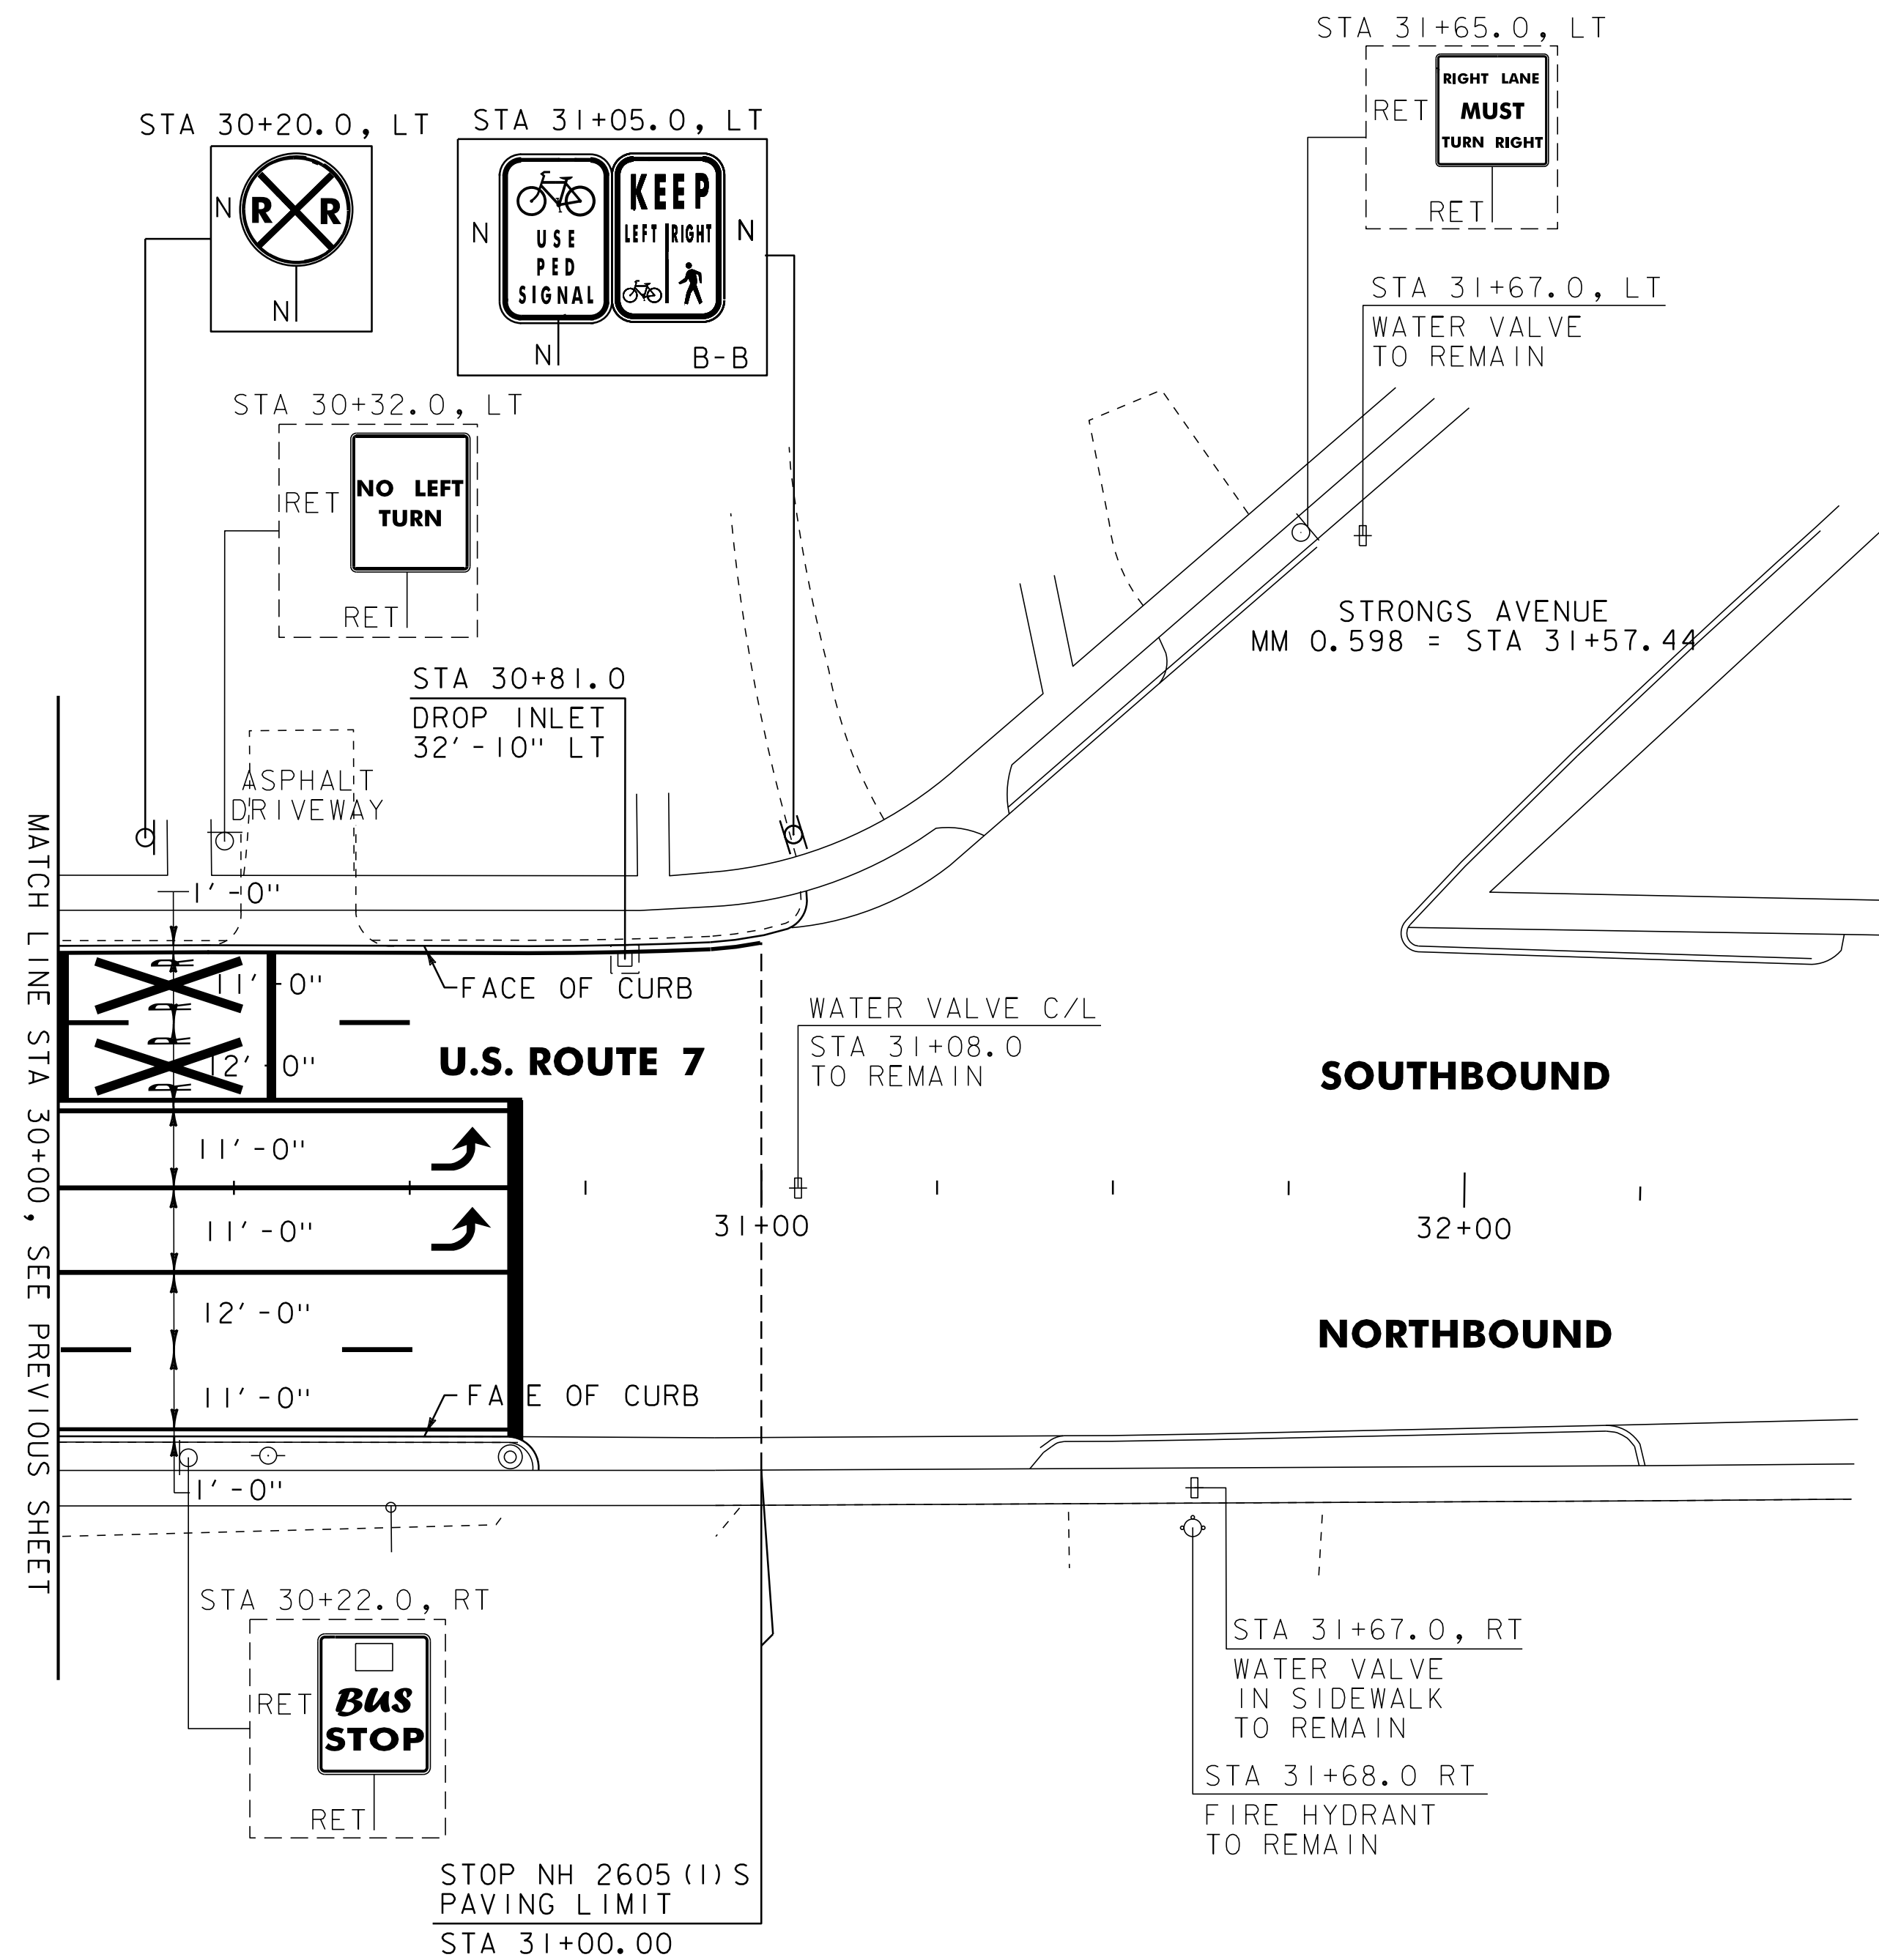

604.412 REHAB. DROP INLETS, CATCH BASINS, OR MANHOLES, CLASS I
 U.S. ROUTE 7:
 STA 30+81.0 LT

NOTE:
 1. SEE SHEET 41 FOR VIDEO DETECTION SYSTEM SHEET.

SIGN LEGEND
 R = REMOVE
 S = SALVAGE
 N = NEW
 RET = RETAIN
 B-B = BACK TO BACK
 EXISTING = -----
 NEW = _____

PROJECT LAYOUT SHEET #6	PROJECT NAME: RUILAND CITY	PLOT DATE: 03-AUG-2012 12:2
	PROJECT NUMBER: NH 2605(1)S	DRAWN BY: CAK
	DESIGNED BY: MJL	CHECKED BY: DWE
	IPARM FILE: p06d050106.i	SHEET 18 OF 76