

646.602 TEMPORARY 4" WHITE LINE, PAINT  
 646.402 DURABLE 4" WHITE LINE, THERMOPLASTIC  
 313+50 TO 324+00 SOLID LT  
 313+50 TO 324+00 SOLID RT

646.612 TEMPORARY 4" YELLOW LINE, PAINT  
 646.412 DURABLE 4" YELLOW LINE, THERMOPLASTIC  
 313+50 TO 324+00 SOLID LT & RT

621.205 STEEL BEAM GUARDRAIL  
 GALVANIZED W/8' POSTS  
 319+25.5 TO 321+75.5 RT


621.50 MANUFACTURED  
 TERMINAL SECTION, FLARED  
 318+88 TO 319+25.5 RT  
 321+75.5 TO 322+13 RT

621.80 REMOVAL AND DISPOSAL OF GUARDRAIL  
 319+32 TO 321+70 RT

900.620 SPECIAL PROVISION  
 (DELINEATOR WITH STEEL POST)  
 318+88 RT  
 322+13 RT

675.50 REMOVING SIGNS  
 AS SHOWN - 9

675.60 ERECTING SALVAGED SIGNS  
 AS SHOWN - 1

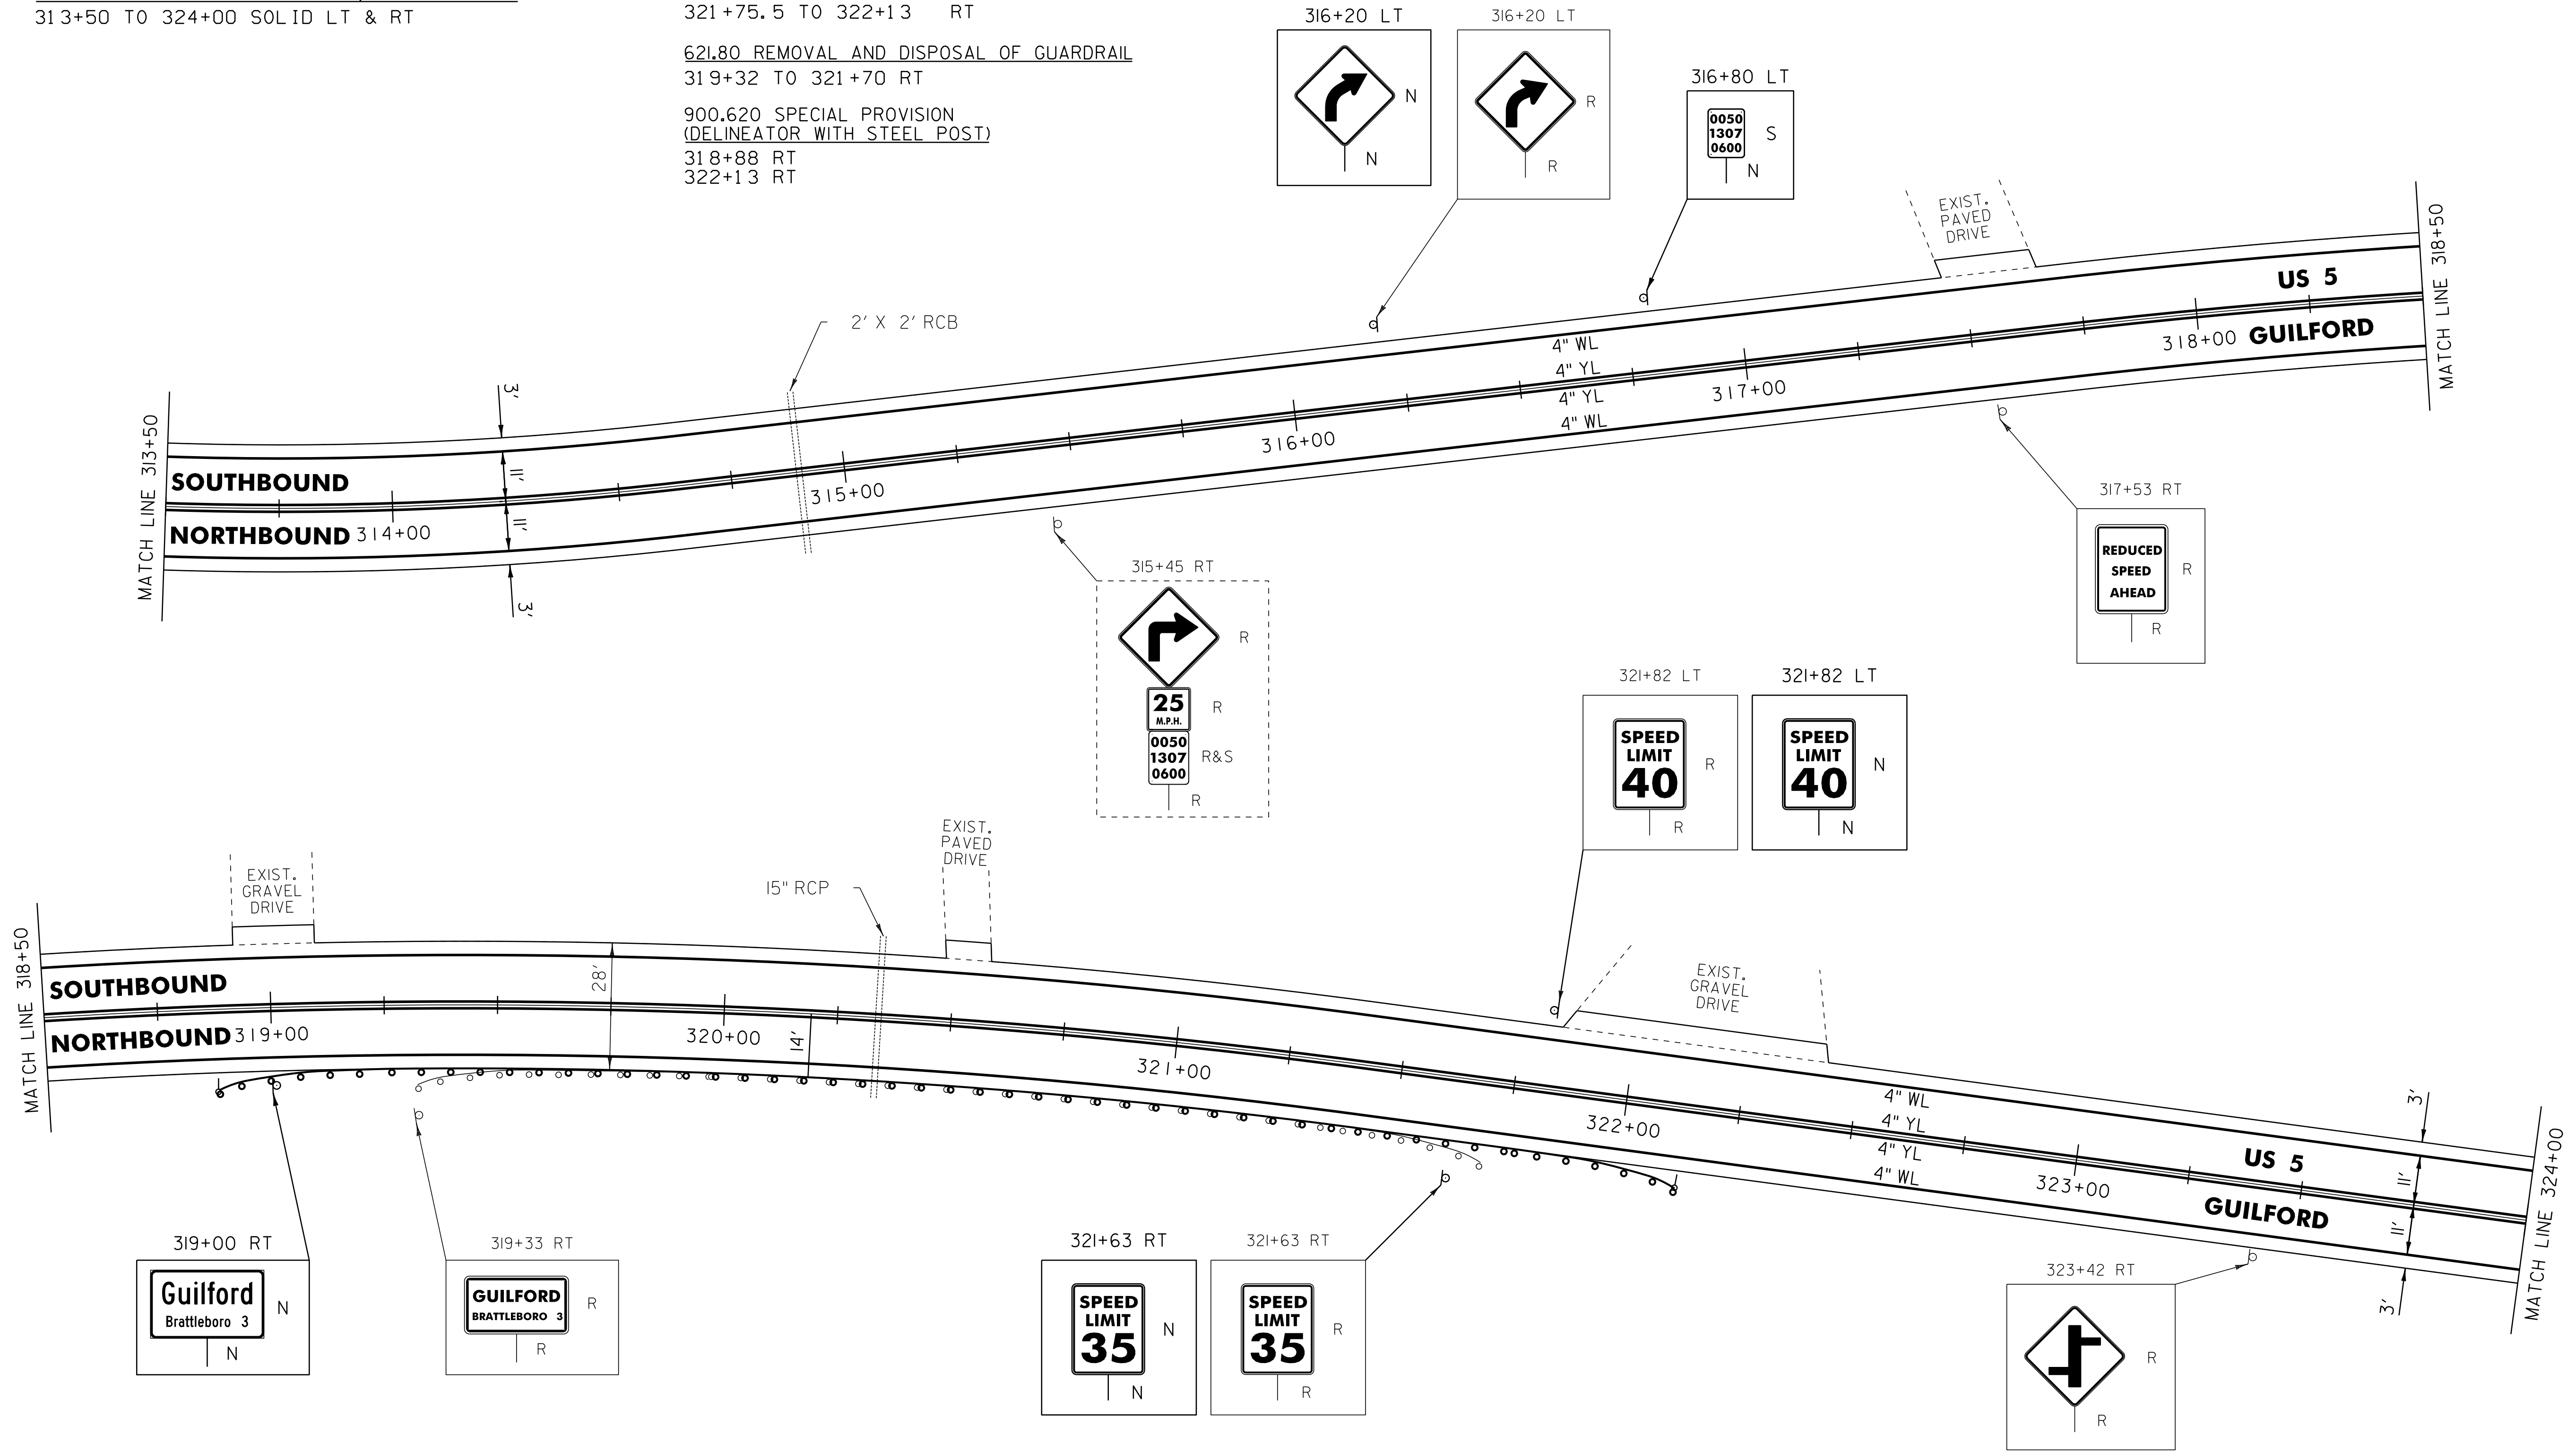

LEGEND

- R = REMOVE EXISTING
- S = SALVAGE
- R&S = REMOVE AND SALVAGE
- N = NEW
- RET = RETAIN
- B-B = BACK TO BACK
- = EXISTING GUARDRAIL
- = PROPOSED GUARDRAIL
- YL = YELLOW LINE
- WL = WHITE LINE
- = DELINEATOR

**ROADWAY LAYOUT 38**

PROJECT NAME: GUILFORD-BRATTLEBORO  
 PROJECT NUMBER: STP 2707(1)

FILE NAME: /pave/07cl66/pcl66  
 PROJECT LEADER: PTS  
 DESIGNED BY: NLL  
 IPARM FILE NAME: 07Cl66.57

PLOT DATE: 29-JAN-2013 11:41  
 DRAWN BY: WWG  
 CHECKED BY: NLL/PTS  
 SHEET 57 OF 97

NOT TO SCALE