

MILLED RUMBLE STRIPS
 STA. 20+00 TO 21+50, C
 24+02 25+00


TEMPORARY 4 INCH WHITE LINE, PAINT
 DURABLE 4 INCH WHITE LINE (OPTION BID ITEM)
 (ALL LINES WILL INCLUDE EDGE LINE BREAKS
 AND RADIUS FOR SIDE ROADS)
 STA. 20+00 TO 25+00, SOLID LT & RT
 STA. 21+50, SOLID LT (EDGELINES, RICE HILL ROAD, TH-9)
 STA. 21+96, SOLID RT (EDGELINES, SHAWVILLE ROAD, TH-1)

TEMPORARY 4 INCH YELLOW LINE, PAINT
 DURABLE 4 INCH YELLOW LINE (OPTION BID ITEM)
 (ALL LINES WILL INCLUDE C BREAKS FOR SIDE ROADS)
 STA. 20+00 TO 22+70, SOLID LT & RT
 STA. 22+70 TO 25+00, SOLID LT, DASHED RT
 STA. 21+50, DOUBLE SOLID LT (RICE HILL ROAD, TH-9)
 STA. 21+96, DOUBLE SOLID RT (SHAWVILLE ROAD, TH-1)

TEMPORARY 24 INCH STOP BAR, PAINT
 DURABLE 24 INCH STOP BAR (OPTION BID ITEM)
 STA. 21+50, LT (RICE HILL ROAD, TH-9)
 STA. 21+96, RT (SHAWVILLE ROAD, TH-1)

TEMPORARY LETTER OR SYMBOL, PAINT
 DURABLE LETTER OR SYMBOL (OPTION BID ITEM)
 STA. 21+50, LT "STOP" (RICE HILL ROAD, TH-9)
 STA. 21+96, RT "STOP" (SHAWVILLE ROAD, TH-1)

REMOVING SIGNS
 AS SHOWN - 7

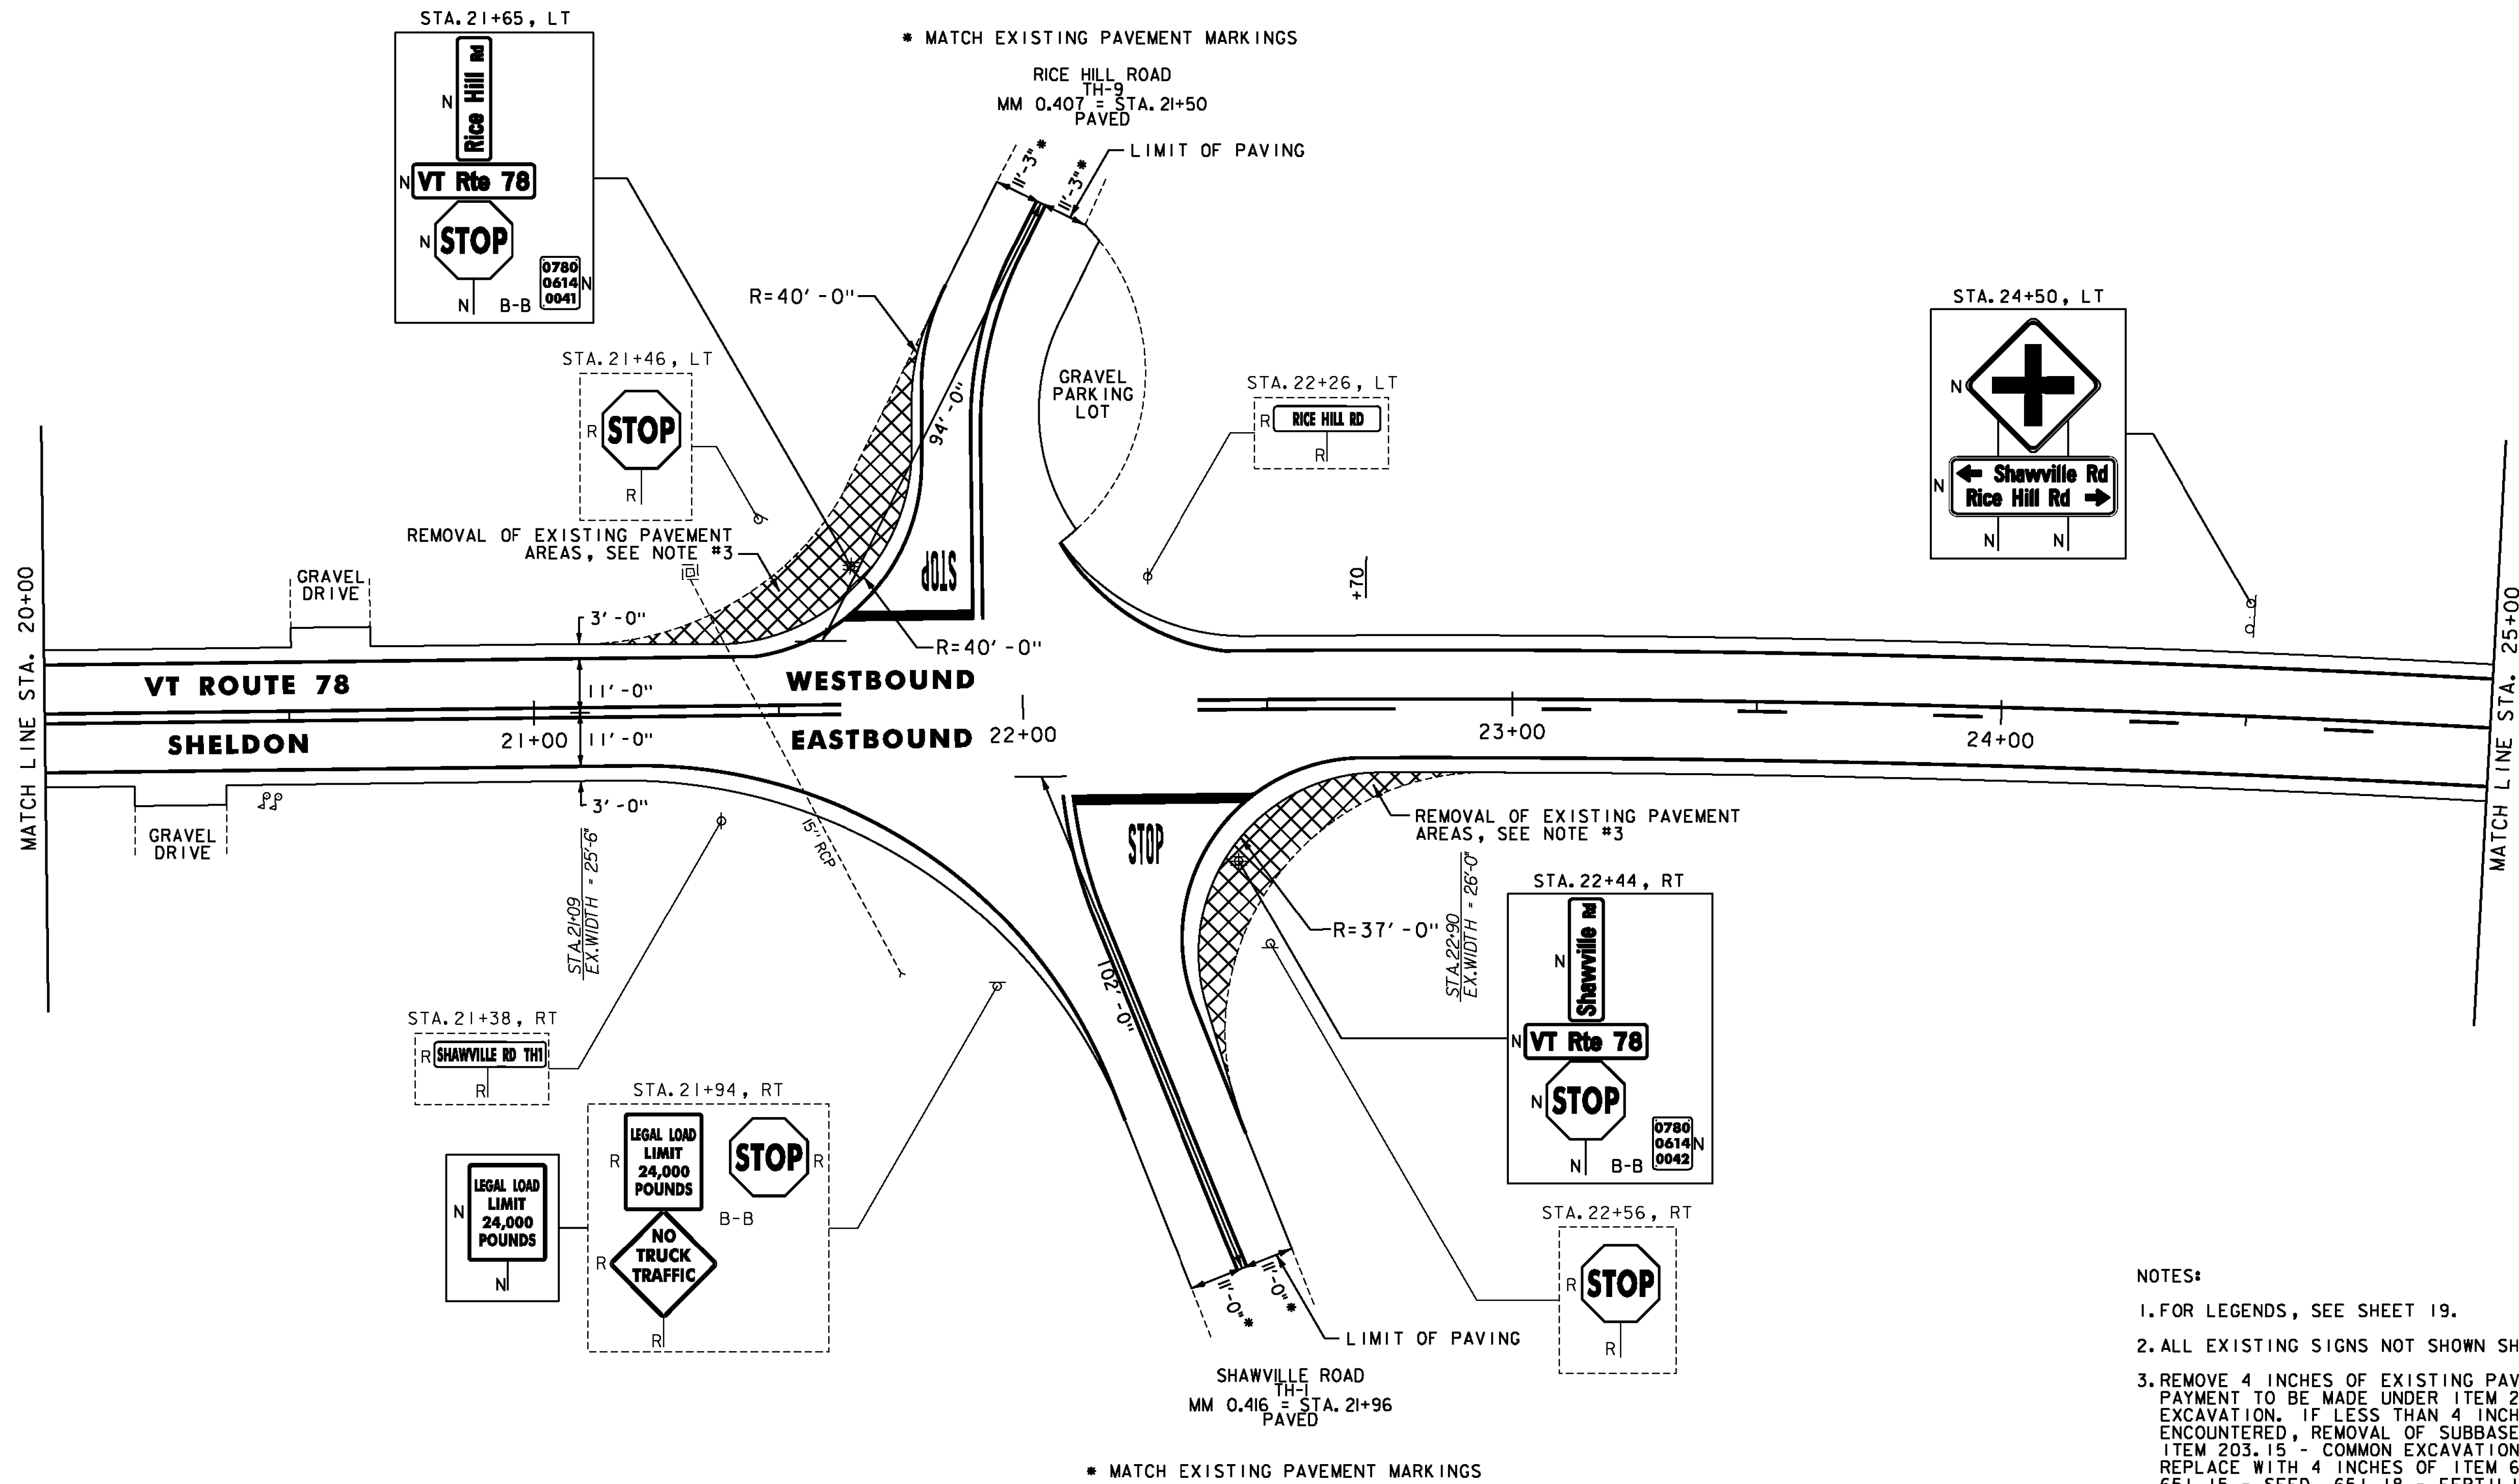

- NOTES:
1. FOR LEGENDS, SEE SHEET 19.
 2. ALL EXISTING SIGNS NOT SHOWN SHALL BE RETAINED.
 3. REMOVE 4 INCHES OF EXISTING PAVEMENT AS SHOWN. PAYMENT TO BE MADE UNDER ITEM 203.15 - COMMON EXCAVATION. IF LESS THAN 4 INCHES OF PAVEMENT IS ENCOUNTERED, REMOVAL OF SUBBASE SHALL BE PAID UNDER ITEM 203.15 - COMMON EXCAVATION. REPLACE WITH 4 INCHES OF ITEM 651.35 - TOPSOIL, 651.15 - SEED, 651.18 - FERTILIZER, 651.20 - AGRICULTURAL LIMESTONE AND 653.20 - TEMPORARY EROSION MATTING. ESTIMATED QUANTITIES OF THE INDICATED ITEMS HAVE BEEN INCLUDED FOR USE AS DIRECTED BY THE ENGINEER.

NOT TO SCALE

PROJECT LAYOUT SHEET #57

PROJECT NAME: SWANTON-SHELDON
 PROJECT NUMBER: STP 2715(I)

FILE NAME: p07cl86.dgn
 PROJECT LEADER: G. EDWARDS
 DESIGNED BY: G. BARRETT

PLOT DATE: 4/24/2014
 DRAWN BY: G. BARRETT
 CHECKED BY: M. FOISY
 SHEET 75 OF 121

