LOCATION				FEET OF DITCHING			MISCELLANEOUS ITEMS				REMARKS
							613.10	649.31	651.15	653.20	
SITE	STATION	STATION	POS.	PERCENT GRADE			STONE FILL, TYPE I	GEOT. UNDER STONE FILL	SEED	TEMP. EROS. MATT.	
				0-2.5	2.5-10	>10					
BARTON							CY	SY	LB	SY	
U.S. ROUTE 5											
1	259+20	260+20	LT	100					1	44	
2	311+35	312+60	RT	125					1	56	
3	313+20	315+00	RT	180					1	80	
VT ROUTE 16											
4	92+19	93+12	RT	93					1	41	
5	99+50	100+40	RT	90					1	40	
6	101+00	103+90	RT	290					2	129	
VT ROUTE 58											
7	26+60	28+35	RT	175					1	78	
8	39+10	39+76	RT	66					1	29	
											*SEE DETAILED SUMMARY OF QUANTITIES ON SHEET 6
TOTALS				1119					9*	497*	

LOCATION				FEET OF DITCHING			MISCELLANEOUS ITEMS				REMARKS
							613.10	649.31	651.15	653.20	
SITE	STATION	STATION	POS.	PERCENT GRADE			STONE FILL, TYPE I	GEOT. UNDER STONE FILL	SEED	TEMP. EROS. MATT.	
				0-2.5	2.5-10	>10					
							CY	SY	LB	SY	

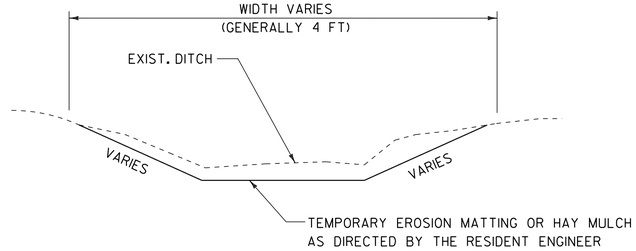

DITCH DETAIL 0 – 2.5 PERCENT

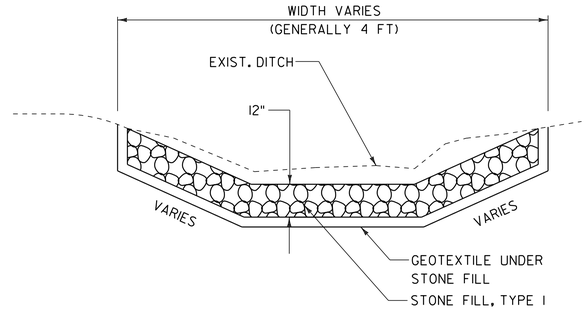

DITCH DETAIL ≥ 2.5 PERCENT

NOTES:

1. PIPE INLET AND OUTLET AREAS AND DITCH CLEANING THROUGHOUT THE PROJECT SHALL BE PERFORMED AT LOCATIONS IDENTIFIED ON THIS SHEET AND AS DIRECTED BY THE RESIDENT ENGINEER. PAYMENT WILL BE UNDER THE APPLICABLE EQUIPMENT RENTAL ITEM(S).

2. GRADES BETWEEN 0 AND 2.5 PERCENT SHALL USE 651.15, SEED AND ITEM 653.20, TEMPORARY EROSION MATTING AS DIRECTED BY THE RESIDENT ENGINEER. GRADES 2.5 PERCENT OR GREATER SHALL USE ITEM 649.31, GEOTEXTILE UNDER STONE FILL AND ITEM 613.10, STONE FILL TYPE I AS DIRECTED BY THE RESIDENT ENGINEER.

NOT TO SCALE

Stantec

DITCH CLEANING DETAIL SHEET

PROJECT NAME: BARTON
PROJECT NUMBER: STP 2702(1)

FILE NAME: p07c192.dgn
PROJECT LEADER: JLL
DESIGNED BY: STANTEC
IPARM FILE: p07c192dcs.i

PLOT DATE: 30-OCT-2013 17:0
DRAWN BY: STANTEC
CHECKED BY: STANTEC
SHEET 15 OF 75