

REHAB, DIS, CBS OR MHS, CLASS I OR II  
 STA. 25+16, RT  
 CHANGE ELEVATION OF SEWER MANHOLES  
 STA. 25+30, LT  
 VERTICAL GRANITE CURB  
 STA. 25+03 TO 25+15, LT  
 REMOVAL OF EXISTING CURB  
 STA. 25+17, LT  
 PORTLAND CEMENT CONCRETE SIDEWALK,  
 5 INCH  
 STA. 25+01 TO 25+20, LT  
 DETECTABLE WARNING SURFACE  
 STA. 25+17, LT  
 STEEL BEAM GUARDRAIL, GALVANIZED  
 STA. 25+79 TO 27+50, LT  
 ANCHOR FOR STEEL BEAM RAIL  
 STA. 25+79, LT  
 REMOVAL AND DISPOSAL OF GUARDRAIL  
 STA. 25+88 TO 27+50, LT


ADJUST ELEVATION OF VALVE BOX  
 STA. 22+53, LT  
 STA. 24+25, RT  
 STA. 25+34, LT

DURABLE 4 INCH WHITE LINE  
 (ALL LINES WILL INCLUDE EDGE LINE BREAKS AND  
 RADII FOR SIDE ROADS)  
 STA. 21+50 TO 27+50, SOLID LT & RT  
 STA. 25+24, SOLID RT (LIBERTY ST)  
 DURABLE 4 INCH YELLOW LINE  
 (ALL LINES WILL INCLUDE @ BREAKS FOR SIDE ROADS)  
 STA. 21+50 TO 27+50, SOLID LT & RT  
 STA. 25+24, DOUBLE SOLID RT (LIBERTY ST)

DURABLE 8 INCH WHITE LINE  
 STA. 22+53 TO 22+65, LT (HYDRANT)  
 STA. 24+18 TO 24+30, RT (HYDRANT)  
 (SEE DETAIL ON SHEET 14)  
 DURABLE 24 INCH STOP BAR  
 STA. 25+24, RT (LIBERTY ST)  
 DURABLE LETTER OR SYMBOL  
 STA. 25+24, RT "STOP" (LIBERTY ST)

DURABLE CROSSWALK MARKING  
 STA. 23+87, LT & RT  
 STA. 25+19, LT & RT  
 TEMPORARY 4 INCH WHITE LINE, PAINT  
 (ALL LINES WILL INCLUDE EDGE LINE BREAKS AND  
 RADII FOR SIDE ROADS)  
 STA. 21+50 TO 27+50, SOLID LT & RT  
 STA. 25+24, SOLID RT (LIBERTY ST)  
 TEMPORARY 4 INCH YELLOW LINE, PAINT  
 (ALL LINES WILL INCLUDE @ BREAKS FOR SIDE ROADS)  
 STA. 21+50 TO 27+50, SOLID LT & RT  
 STA. 25+24, DOUBLE SOLID RT (LIBERTY ST)

TEMPORARY 8 INCH WHITE LINE, PAINT  
 STA. 22+53 TO 22+65, LT (HYDRANT)  
 STA. 24+18 TO 24+30, RT (HYDRANT)  
 (SEE DETAIL ON SHEET 14)  
 TEMPORARY 24 INCH STOP BAR, PAINT  
 STA. 25+24, RT (LIBERTY ST)  
 TEMPORARY LETTER OR SYMBOL, PAINT  
 STA. 25+24, RT "STOP" (LIBERTY ST)  
 TEMPORARY CROSSWALK MARKING, PAINT  
 STA. 23+87, LT & RT  
 STA. 25+19, LT & RT  
 REMOVING SIGNS  
 AS SHOWN - 7

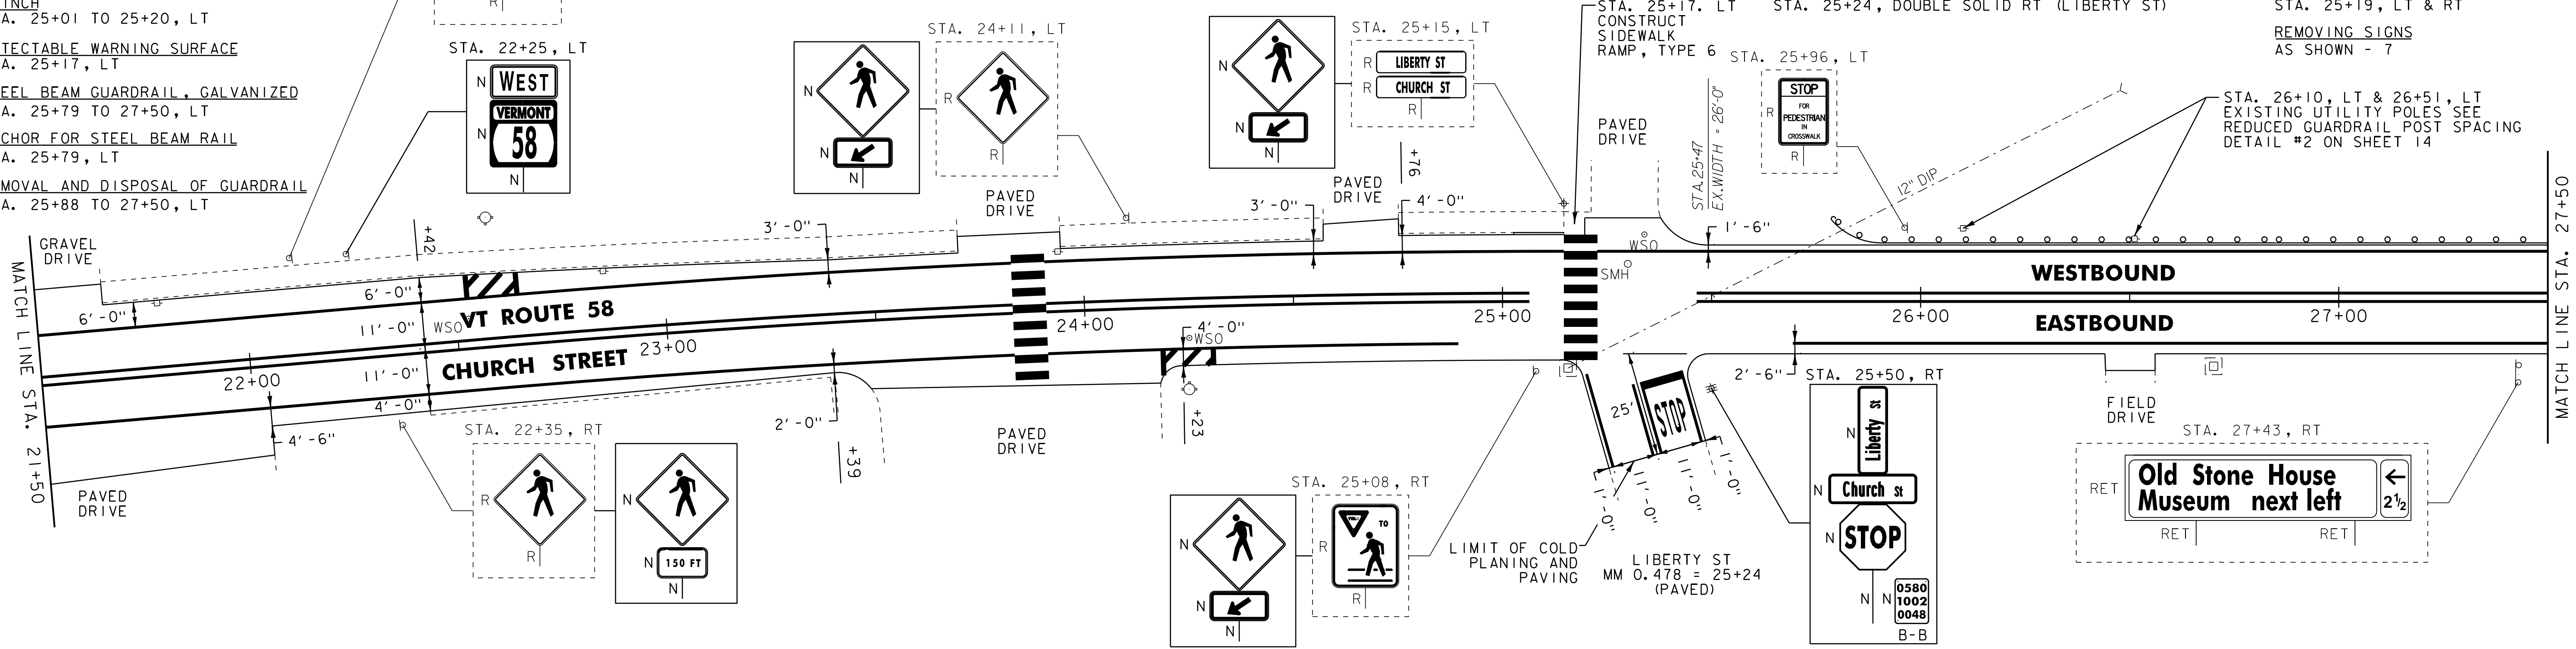

REHAB, DIS, CBS OR MHS, CLASS I OR II  
 STA. 30+50, RT  
 CHANGING ELEVATION OF SEWER MANHOLE  
 STA. 30+21, LT  
 STEEL BEAM GUARDRAIL, GALVANIZED  
 STA. 27+50.0 TO 32+47.0, LT


ANCHOR FOR STEEL BEAM RAIL  
 STA. 32+47.0, LT  
 REMOVAL AND DISPOSAL OF GUARDRAIL  
 STA. 27+50.0 TO 32+47.0, LT  
 DURABLE 4 INCH WHITE LINE  
 (ALL LINES WILL INCLUDE EDGE LINE BREAKS AND  
 RADII FOR SIDE ROADS)  
 STA. 27+50 TO 32+50, SOLID LT & RT

DURABLE 4 INCH YELLOW LINE  
 (ALL LINES WILL INCLUDE @ BREAKS FOR SIDE ROADS)  
 STA. 27+50 TO 32+50, SOLID LT & RT  
 STA. 29+33 TO 29+96, DOUBLE SOLID RT (EAST ST)

DURABLE 24 INCH STOP BAR  
 STA 29+96 TO 30+18, RT (EAST ST)  
 DURABLE LETTER OR SYMBOL  
 STA. 30+01, RT "STOP" (EAST ST)

TEMPORARY 4 INCH WHITE LINE, PAINT  
 (ALL LINES WILL INCLUDE EDGE LINE BREAKS AND  
 RADII FOR SIDE ROADS)  
 STA. 27+50 TO 32+50, SOLID LT & RT  
 TEMPORARY 4 INCH YELLOW LINE, PAINT  
 (ALL LINES WILL INCLUDE @ BREAKS FOR SIDE ROADS)  
 STA. 27+50 TO 32+50, SOLID LT & RT  
 STA. 29+33 TO 29+96, DOUBLE SOLID RT (EAST ST)

TEMPORARY 24 INCH STOP BAR, PAINT  
 STA 29+96 TO 30+18, RT (EAST ST)  
 TEMPORARY LETTER OR SYMBOL, PAINT  
 STA. 30+01, RT "STOP" (EAST ST)  
 REMOVING SIGNS  
 AS SHOWN - 2

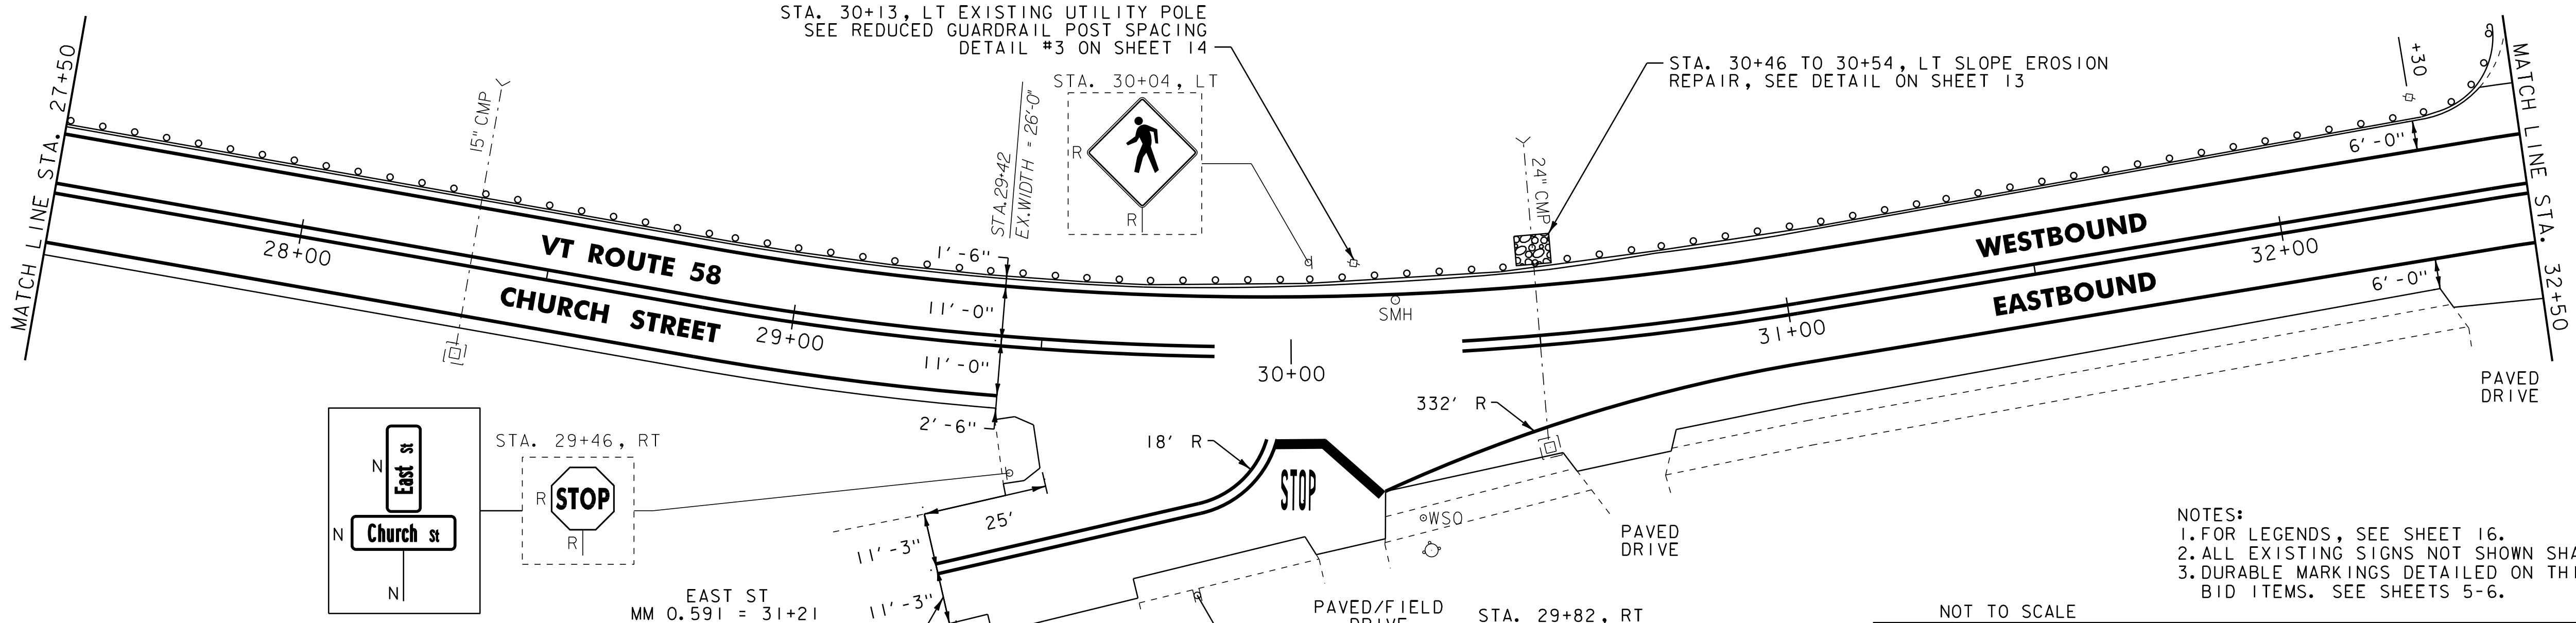

NOTES:  
 1. FOR LEGENDS, SEE SHEET 16.  
 2. ALL EXISTING SIGNS NOT SHOWN SHALL BE RETAINED.  
 3. DURABLE MARKINGS DETAILED ON THIS SHEET ARE OPTION  
 BID ITEMS. SEE SHEETS 5-6.

NOT TO SCALE

**PROJECT LAYOUT SHEET #20**

PROJECT NAME: BARTON	PLOT DATE: 30-OCT-2013 17:0
PROJECT NUMBER: STP 2702(I)	DRAWN BY: STANTEC
FILE NAME: p07c192.dgn	DESIGNED BY: STANTEC
IPARM FILE: p07c192i20.i	SHEET 36 OF 75

