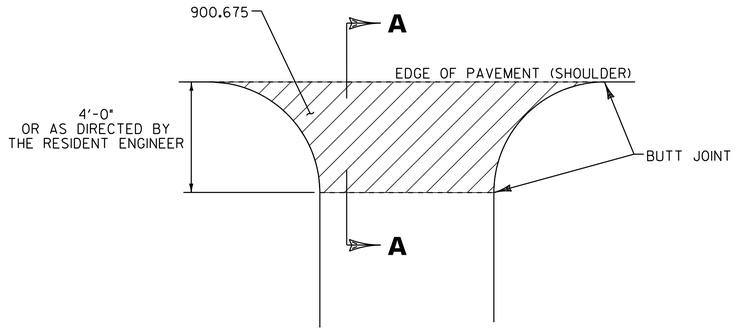

PLAN

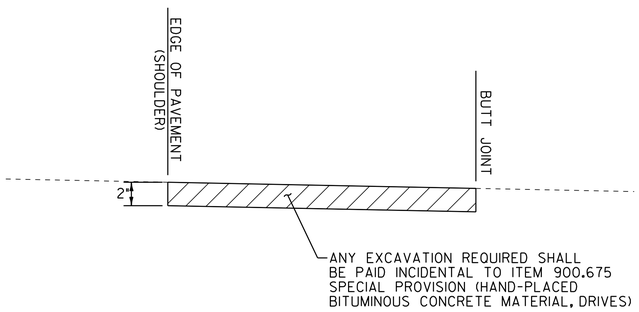

SECTION

HANDWORK DETAILS FOR PAVED DRIVES

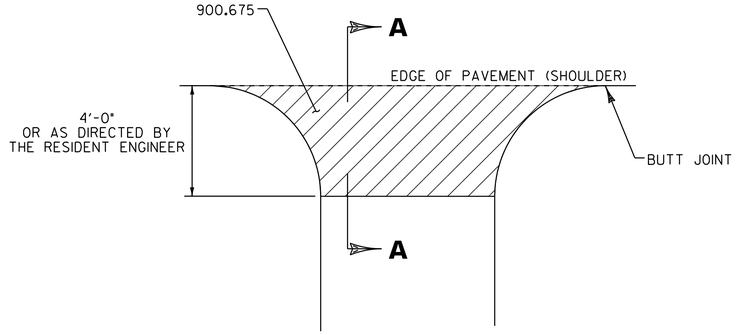

PLAN

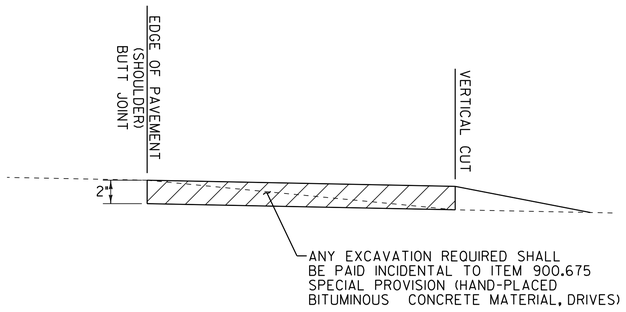

SECTION A-A

HANDWORK DETAILS FOR GRAVEL DRIVES

STATION	POSITION	QUANTITY (SY)
STP 2620(1)		
VT ROUTE 105		
130+67	RT	15
131+58	LT	20
132+09	RT	44
132+51	LT	8
132+74	RT	8
133+79	RT	6
133+82	LT	5
134+47	RT	10
134+71	LT	4
134+92	LT	8
135+29	RT	13
136+03	RT	4
136+21	RT	7
136+25	LT	8
137+30	RT	6
138+21	LT	10
138+43	RT	10
138+81	RT	16
138+92	LT	8
139+17	LT	7
140+09	LT	7
140+97	RT	5

STATION	POSITION	QUANTITY (SY)
141+20	LT	7
141+97	RT	5
143+14	RT	6
143+20	LT	5
143+33	LT	4
143+96	RT	5
144+07	LT	5
144+74	LT	8
145+02	LT	7
145+20	RT	4
146+07	RT	5
146+70	RT	7
147+01	LT	17
147+77	RT	6
148+63	LT	8
149+32	LT	36
152+21	LT	24
153+49	RT	15
154+59	RT	8
154+91	RT	11
157+03	RT	5
157+99	LT	22
159+16	RT	8
159+90	RT	6

STATION	POSITION	QUANTITY (SY)
160+09	LT	11
160+42	RT	5
160+45	LT	4
161+38	RT	6
162+62	RT	6
163+08	RT	7
163+66	LT	8
VT ROUTE 243		
47+24	LT	58
47+37	RT	38
48+03	RT	21
48+85	LT	88
49+04	RT	5
50+01	LT	17
52+36	LT	10
53+52	RT	7
53+66	LT	5
54+36	LT	5
54+62	LT	6
54+71	RT	6
55+38	LT	5
55+73	LT	6
55+95	RT	6
56+30	RT	11

STATION	POSITION	QUANTITY (SY)
56+57	LT	21
58+06	LT	43
59+04	LT	42
59+80	LT	24
59+89	RT	10
60+46	LT	10
60+61	RT	6
SUBTOTAL		960
ROUNDING		10
TOTAL		970

NOTES:

1. PAVING LIFT SHALL BE A MINIMUM OF 1 1/2 " AND A MAXIMUM OF 2".
2. THE COST OF PROVIDING AND PLACING SUBBASE MATERIAL, CLEANING EXISTING PAVED SURFACES, INCLUDING POWER EQUIPMENT, AND FOR FILLING JOINTS, CRACKS AND HOLES WILL NOT BE PAID DIRECTLY BUT WILL BE CONSIDERED INCIDENTAL TO ITEM 900.675 SPECIAL PROVISION (HAND-PLACED BITUMINOUS CONCRETE MATERIAL, DRIVES).
3. EXCAVATION NEEDED TO ACHIEVE PROPER DRIVE SLOPES WILL NOT BE PAID DIRECTLY BUT WILL BE CONSIDERED INCIDENTAL TO ITEM 900.675 SPECIAL PROVISION (HAND-PLACED BITUMINOUS CONCRETE MATERIAL, DRIVES).

LEGEND

ITEM 900.675 SPECIAL PROVISION (HAND-PLACED BITUMINOUS CONCRETE MATERIAL, DRIVES)

NOT TO SCALE

Stantec

DRIVE DETAIL SHEET

PROJECT NAME: NORTH TROY
PROJECT NUMBER: STP 2620(1)

FILE NAME: p06b208.dgn
PROJECT LEADER: JLL
DESIGNED BY: MCF
IPARM FILE: p06b208ds.i
PLOT DATE: 25-OCT-2011 14:03
DRAWN BY: STANTEC
CHECKED BY: JLL
SHEET 83 OF 116