LOCATION				FEET OF DITCHING			MISC. ITEMS			REMARKS
							613.10	649.31	653.20	
SITE	STATION	STATION	POS.	PERCENT GRADE			STONE FILL TYP. I	GEOT. UNDER STONE FILL	TEMP. EROS. MATT.	
				0-1	1-2.5	2.5-10	CY	SY	SY	
VT ROUTE 243										
TROY										
1	6+12	10+56	RT	444						
2	10+56	23+76	RT		1320				587	
3	23+76	45+67	RT		264	1927	285	1285	117	
PROJECT SUBTOTALS (EST.)				444	1584	1927	285	1285	704	
ROUNDING				-	-	-	15	15	-	
PROJECT TOTALS				444	1584	1927	300	1300	704	

LOCATION				FEET OF DITCHING			MISC. ITEMS			REMARKS
							613.10	649.31	653.20	
SITE	STATION	STATION	POS.	PERCENT GRADE			STONE FILL TYP. I	GEOT. UNDER STONE FILL	TEMP. EROS. MATT.	
				0-1	1-2.5	2.5-10	CY	SY	SY	

LOCATION				FEET OF DITCHING			MISC. ITEMS			REMARKS
							613.10	649.31	653.20	
SITE	STATION	STATION	POS.	PERCENT GRADE			STONE FILL TYP. I	GEOT. UNDER STONE FILL	TEMP. EROS. MATT.	
				0-1	1-2.5	2.5-10	CY	SY	SY	

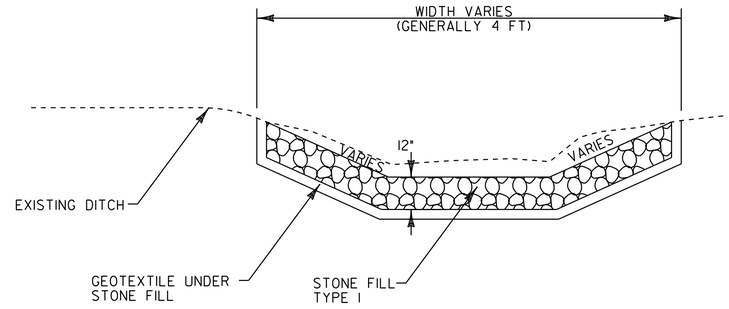

DITCH DETAIL

NOTES:

1. PIPE INLET AND OUTLET AREAS, AND DITCH CLEANING THROUGH PROJECT, SHALL BE PERFORMED AT LOCATIONS INDICATED ON THIS SHEET AND AS DIRECTED BY THE VAOT RESIDENT ENGINEER. PAYMENT WILL BE UNDER THE APPLICABLE EQUIPMENT RENTAL ITEM(S).

2. ESTIMATED QUANTITIES OF TEMPORARY EROSION MATTING, SEED, AND STONE FILL TYPE I HAVE BEEN INCLUDED. DITCHES WITH A GRADE LESS THAN 1 PERCENT SHALL BE SEEDED. TEMPORARY EROSION MATTING SHALL BE USED IN ALL DITCHES WITH A GRADE BETWEEN 1 AND 2.5 PERCENT. STONE FILL, TYPE I SHALL BE USED IN ALL DITCHES WITH A GRADE BETWEEN 2.5 AND 10 PERCENT OR AS DIRECTED BY THE VAOT RESIDENT ENGINEER.

Stantec

DITCH CLEANING DETAIL SHEET

PROJECT NAME: TROY
PROJECT NUMBER: STP 2621(1)

FILE NAME: p06c210.dgn
PROJECT LEADER: JLL
DESIGNED BY: MCF
IPARM FILE: p06c210dcs.i

PLOT DATE: 25-OCT-2011 14:04
DRAWN BY: STANTEC
CHECKED BY: JLL
SHEET 107 OF 116