

TEMPORARY 4 INCH WHITE LINE, PAINT
 DURABLE 4 INCH WHITE LINE (OPTION BID ITEM)
 C47+50 TO C53+50 SOLID LT & RT

TEMPORARY 4 INCH YELLOW LINE, PAINT
 DURABLE 4 INCH YELLOW LINE (OPTION BID ITEM)
 C47+50 TO C53+50 SOLID LT & RT

STEEL BEAM GUARDRAIL, GALVANIZED
 C47+78.5 TO C48+78.5 RT
 C51+73 TO C52+10.5 RT





STEEL BEAM GUARDRAIL,
 GALVANIZED W/8 FEET POSTS
 C47+50 TO C47+78.5 RT

REMOVE AND RESET GUARDRAIL
 C52+10.5 TO C53+50 RT

ANCHOR FOR STEEL BEAM RAIL
 2 (SEE STANDARD G-1d)

REMOVAL AND DISPOSAL OF GUARDRAIL
 C47+50 TO C48+78 RT
 C51+73 TO C52+10.5 RT

DELINEATOR WITH STEEL POST
 C48+78.5 RT
 C51+73 RT

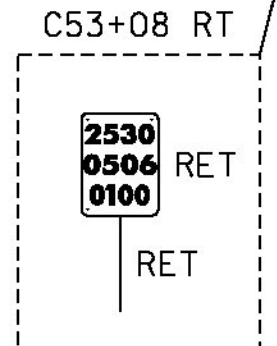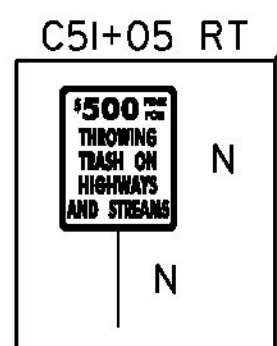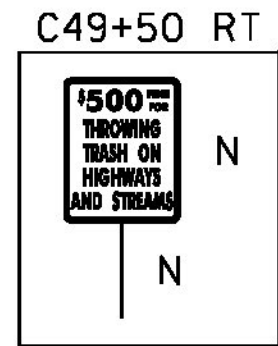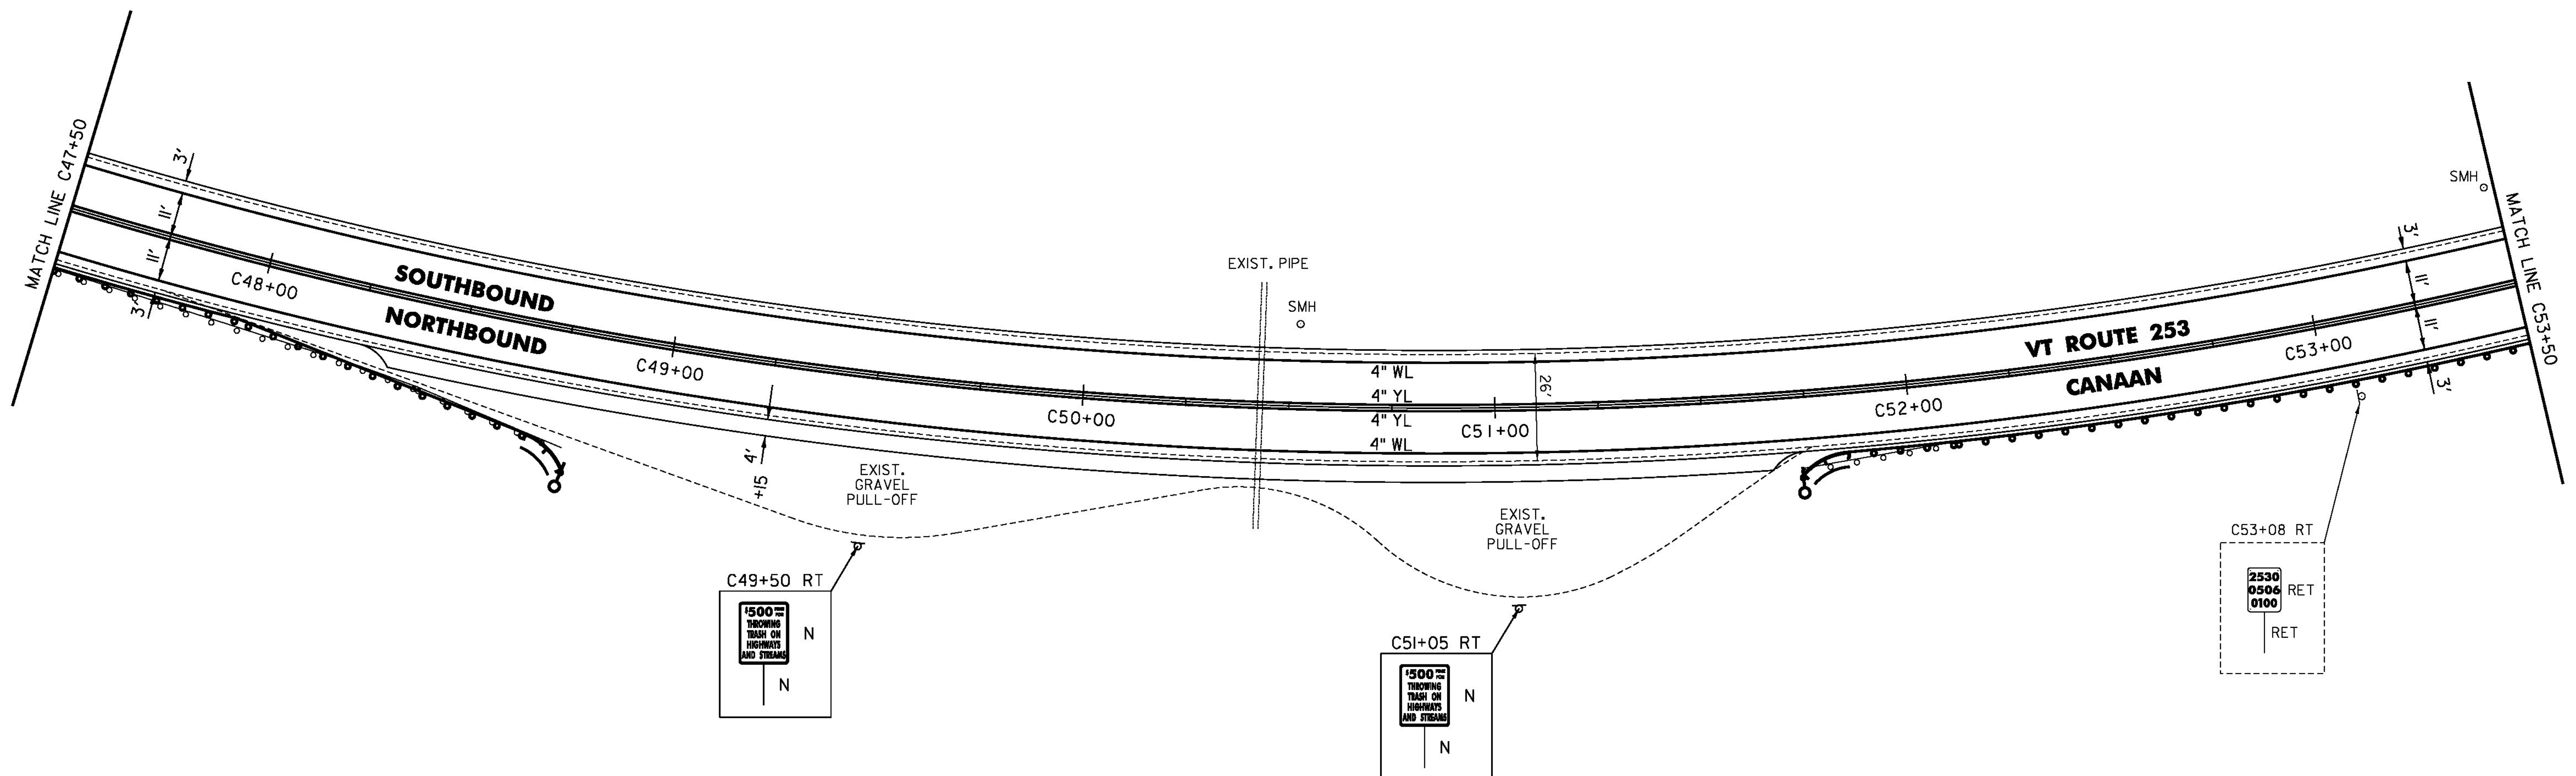

NOT TO SCALE

PROJECT NAME:	LEMINGTON-CANAAN
PROJECT NUMBER:	STP 2723(I)
FILE NAME:	z07c2i4bdr.dgn
PROJECT LEADER:	P. SHEDD
DESIGNED BY:	N. LEMAY
VT 253 PLAN SHEET	9
PLOT DATE:	2/28/2015
DRAWN BY:	W. GORDON
CHECKED BY:	P. SHEDD
SHEET	132 OF 162