LOCATION				FEET OF DITCHING				MISC. ITEMS				REMARKS
								653.20	613.10	649.31	651.15	
SITE	STATION	STATION	POS.	PERCENT GRADE				TEMP. EROS. MATT.	STONE FILL, TYPE I	GEOT. UNDER STONE FILL	SEED	
				0-1	1-2.5	2.5-10	>10	SY	CY	SY	LB	
VT. ROUTE 114												
BRIGHTON:												
1	293+94	297+56	RT		362			161			2	
2	299+61	301+07	RT		146			65			1	
3	303+08	308+99	RT		141	450		63	67	300	1	
4	304+26	311+71	LT		295	450		131	67	300	2	
5	317+88	324+14	LT		626			278			4	
6	338+61	341+86	LT		225	100		100	15	67	2	
7	347+73	348+42	LT		69			31			1	
8	388+39	390+24	RT			185			27	123		
MORGAN:												
9	0+00	2+30	RT			230			34	153		
10	7+52	9+52	LT		50	150		22	22	100	1	
11	54+95	55+95	LT		100			44			1	
12	120+22	122+22	LT			200			30	133		
13	123+19	127+92	RT			473			70	315		
14	150+39	162+71	RT		1232			548			7	
WARREN GORE:												
15	0+00	48+74	RT		4374	500		1944	74	333	25	
16	52+04	77+30	RT		1901	625		845	93	417	11	
ROUNDINGS					29	37		18	26	9	2	
TOTALS					9550	3400		4250	425	2250	60	

LOCATION				FEET OF DITCHING				MISC. ITEMS				REMARKS
								653.20	613.10	649.31	651.15	
SITE	STATION	STATION	POS.	PERCENT GRADE				TEMP. EROS. MATT.	STONE FILL, TYPE I	GEOT. UNDER STONE FILL	SEED	
				0-1	1-2.5	2.5-10	>10	SY	CY	SY	LB	

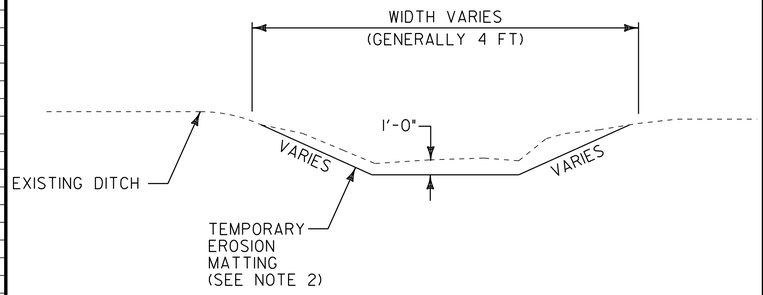

DITCH DETAIL

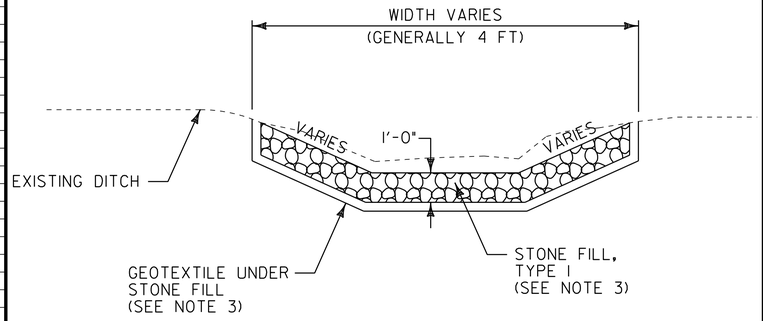

STONE DITCH DETAIL

NOTES:

1. PIPE INLET AND OUTLET AREAS AND DITCH CLEANING THROUGHOUT THE PROJECT SHALL BE PERFORMED AT LOCATIONS IDENTIFIED ON THIS SHEET AND AS DIRECTED BY THE RESIDENT ENGINEER. PAYMENT WILL BE UNDER THE APPLICABLE EQUIPMENT RENTAL ITEM(S).

2. ESTIMATED QUANTITIES OF TEMPORARY EROSION MATTING AND SEED HAVE BEEN INCLUDED AS NEEDED OR AS DIRECTED BY THE RESIDENT ENGINEER.

3. ESTIMATED QUANTITIES OF STONE FILL TYPE I AND GEOTEXTILE UNDER STONE FILL HAVE BEEN INCLUDED AS NEEDED. STONE FILLTYPE I SHALL BE USED IN ALL DITCHES WITH A GRADE BETWEEN 2.5 AND 10 PERCENT OR AS DIRECTED BY THE RESIDENT EMGINEER.

NOT TO SCALE

DITCH CLEANING DETAIL SHEET

PROJECT NAME: BRIGHTON - WARREN GORE

PROJECT NUMBER: STP 2724(I)S

FILE NAME: p07c216.dgn
PROJECT LEADER: D.E.G.
DESIGNED BY: M.J.L.
IPARM FILE: p07c216dcd.i

PLOT DATE: 31-OCT-2011 11:49
DRAWN BY: C.A.K.
CHECKED BY: D.W.E.
SHEET 20 OF 107