

646.402 DURABLE 4 INCH WHITE LINE, THERMOPLASTIC
 (ALL LINES WILL INCLUDE EDGE LINE BREAKS AND
 RADIUS FOR TOWN HIGHWAYS)
 BRIGHTON:
 STA 273+00.00 - STA 287+00.00 EDGE LINE LT & RT

646.412 DURABLE 4 INCH YELLOW LINE, THERMOPLASTIC
 (ALL LINES WILL INCLUDE C/L BREAKS FOR
 TOWN HIGHWAYS) S=SOLID, D=DASHED
 BRIGHTON:
 STA 273+00.00 - STA 287+00.00 LT S CL RT S
 STA 274+66.56 DOUBLE SOLID RT, TH-17

646.442 DURABLE 8 INCH WHITE LINE, THERMOPLASTIC
 BRIGHTON:
 STA 279+01.00 - STA 279+13.00 FIRE HYDRANT NO PARKING ZONE, LT

646.602 TEMPORARY 4 INCH WHITE LINE, PAINT
 (ALL LINES WILL INCLUDE EDGE LINE BREAKS AND
 RADIUS FOR TOWN HIGHWAYS)
 BRIGHTON:
 STA 273+00.00 - STA 287+00.00 EDGE LINE LT & RT

646.612 TEMPORARY 4 INCH YELLOW LINE, PAINT
 (ALL LINES WILL INCLUDE C/L BREAKS FOR
 TOWN HIGHWAYS) S=SOLID, D=DASHED
 BRIGHTON:
 STA 273+00.00 - STA 287+00.00 LT S CL RT S
 STA 274+66.56 DOUBLE SOLID RT, TH-17

646.482 DURABLE 24 INCH STOP BAR, THERMOPLASTIC
 BRIGHTON:
 STA 274+66.56 RT, TH-17


646.682 TEMPORARY 24 INCH STOP BAR, PAINT
 BRIGHTON:
 STA 274+66.56 RT, TH-17

646.492 DURABLE LETTER OR SYMBOL, THERMOPLASTIC
 BRIGHTON:
 STA 274+66.56 RT, TH-17 "S,T,O,P" (4 EA)
 STA 285+02.00 LT, "S,C,H,O,O,L" (6 EA)

646.692 TEMPORARY LETTER OR SYMBOL, PAINT
 BRIGHTON:
 STA 274+66.56 RT, TH-17 "S,T,O,P" (12 EA)
 STA 285+02.00 LT, "S,C,H,O,O,L" (16 EA)

675.50 REMOVING SIGNS
 AS SHOWN - 4

675.60 ERECTING SALVAGED SIGNS
 AS SHOWN - 3

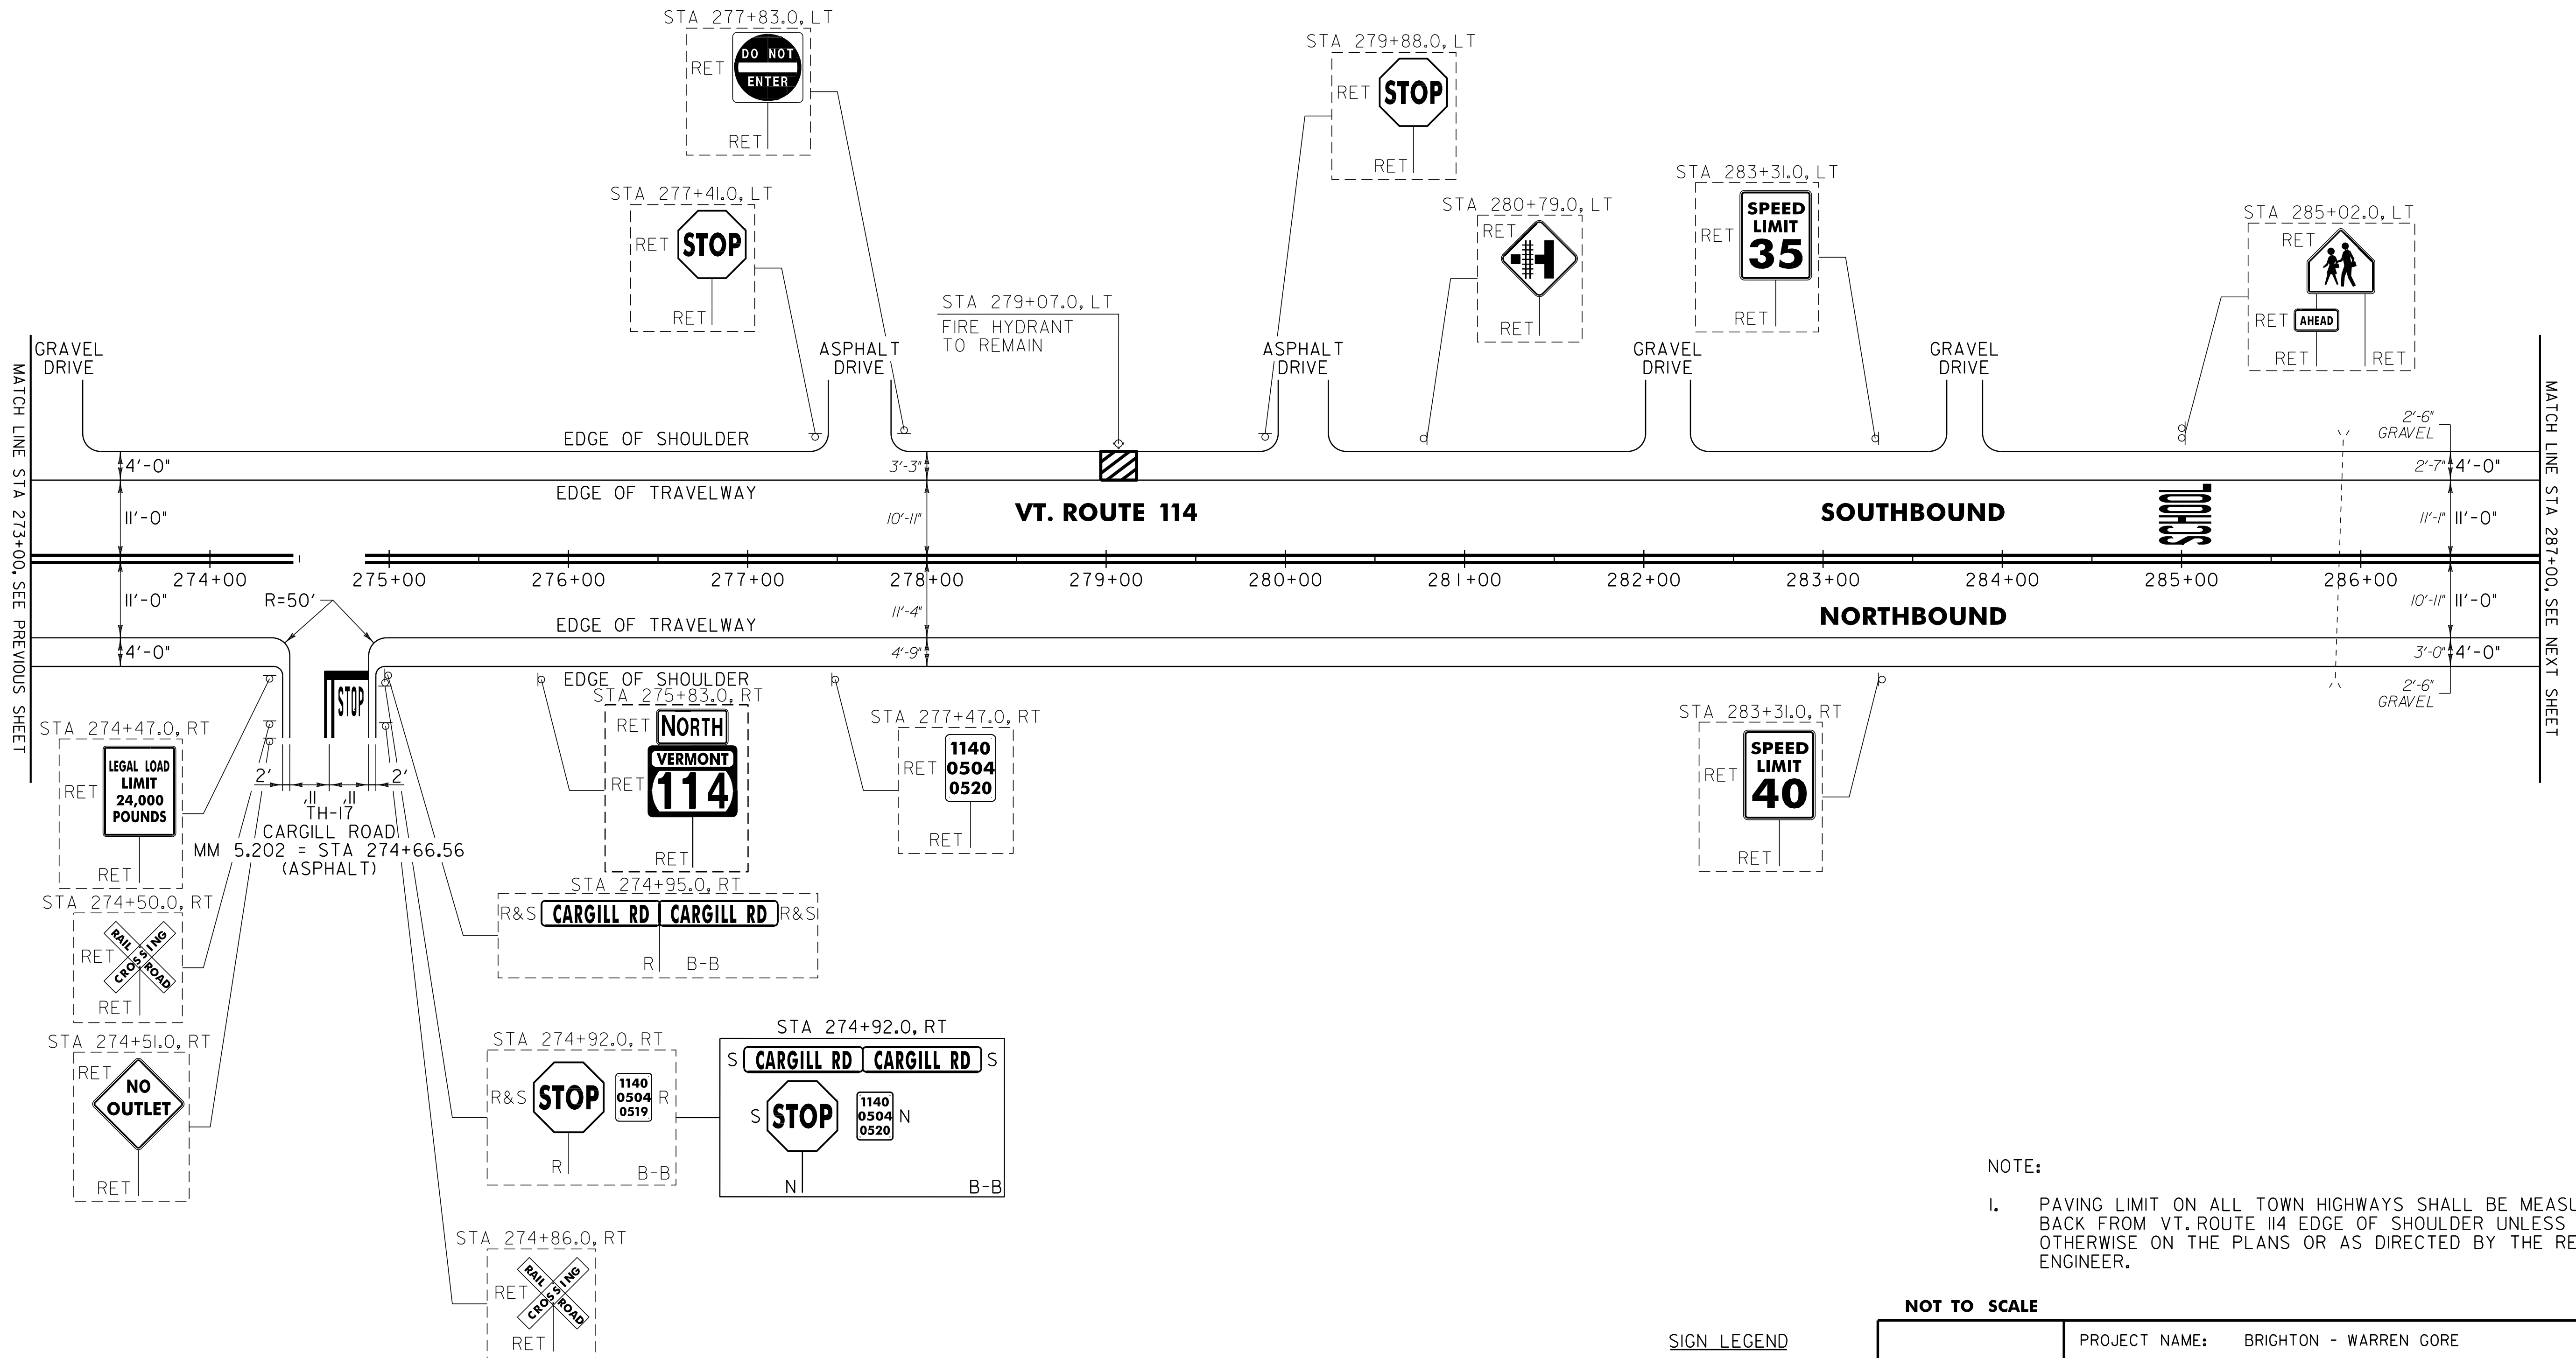

NOTE:
 I. PAVING LIMIT ON ALL TOWN HIGHWAYS SHALL BE MEASURED 25 FT BACK FROM VT. ROUTE 114 EDGE OF SHOULDER UNLESS DENOTED OTHERWISE ON THE PLANS OR AS DIRECTED BY THE RESIDENT ENGINEER.

SIGN LEGEND
 R = REMOVE
 S = SALVAGE
 N = NEW
 RET = RETAIN
 B-B = BACK TO BACK
 EXISTING BY: - - - - -
 NEW = _____

PROJECT LAYOUT SHEET #2	PROJECT NAME: BRIGHTON - WARREN GORE	PLOT DATE: 31-OCT-2011 11:50
	PROJECT NUMBER: STP 2724(1)S	DRAWN BY: C.A.K.
	FILE NAME: p07c216.dgn	CHECKED BY: D.W.E.
	IPARM FILE: p07c216102.1	SHEET 22 OF 107

NOT TO SCALE