

646.402 DURABLE 4 INCH WHITE LINE, THERMOPLASTIC
 (ALL LINES WILL INCLUDE EDGE LINE BREAKS AND
 RADIUS FOR TOWN HIGHWAYS)
 BRIGHTON:
 STA 371+00.00 - STA 385+00.00 EDGE LINE LT & RT

646.412 DURABLE 4 INCH YELLOW LINE, THERMOPLASTIC
 (ALL LINES WILL INCLUDE C/L BREAKS FOR
 TOWN HIGHWAYS) S=SOLID, D=DASHED
 BRIGHTON:
 STA 371+00.00 - STA 385+00.00 LT C RT
 STA 371+00.00 - STA 385+00.00 S S

646.602 TEMPORARY 4 INCH WHITE LINE, PAINT
 (ALL LINES WILL INCLUDE EDGE LINE BREAKS AND
 RADIUS FOR TOWN HIGHWAYS)
 BRIGHTON:
 STA 371+00.00 - STA 385+00.00 EDGE LINE LT & RT

646.612 TEMPORARY 4 INCH YELLOW LINE, PAINT
 (ALL LINES WILL INCLUDE C/L BREAKS FOR
 TOWN HIGHWAYS) S=SOLID, D=DASHED
 BRIGHTON:
 STA 371+00.00 - STA 385+00.00 LT C RT
 STA 371+00.00 - STA 385+00.00 S S

646.482 DURABLE 24 INCH STOP BAR, THERMOPLASTIC
 BRIGHTON:
 STA 382+48.32 LT, VT. ROUTE III


646.682 TEMPORARY 24 INCH STOP BAR, PAINT
 BRIGHTON:
 STA 382+48.32 LT, VT. ROUTE III

646.492 DURABLE LETTER OR SYMBOL, THERMOPLASTIC
 BRIGHTON:
 STA 382+48.32 LT, VT. ROUTE III *S,T,O,P* (4 EA)

646.692 TEMPORARY LETTER OR SYMBOL, PAINT
 BRIGHTON:
 STA 382+48.32 LT, VT. ROUTE III *S,T,O,P* (12 EA)

675.50 REMOVING SIGNS
 AS SHOWN - 33

675.60 ERECTING SALVAGED SIGNS
 AS SHOWN - 2

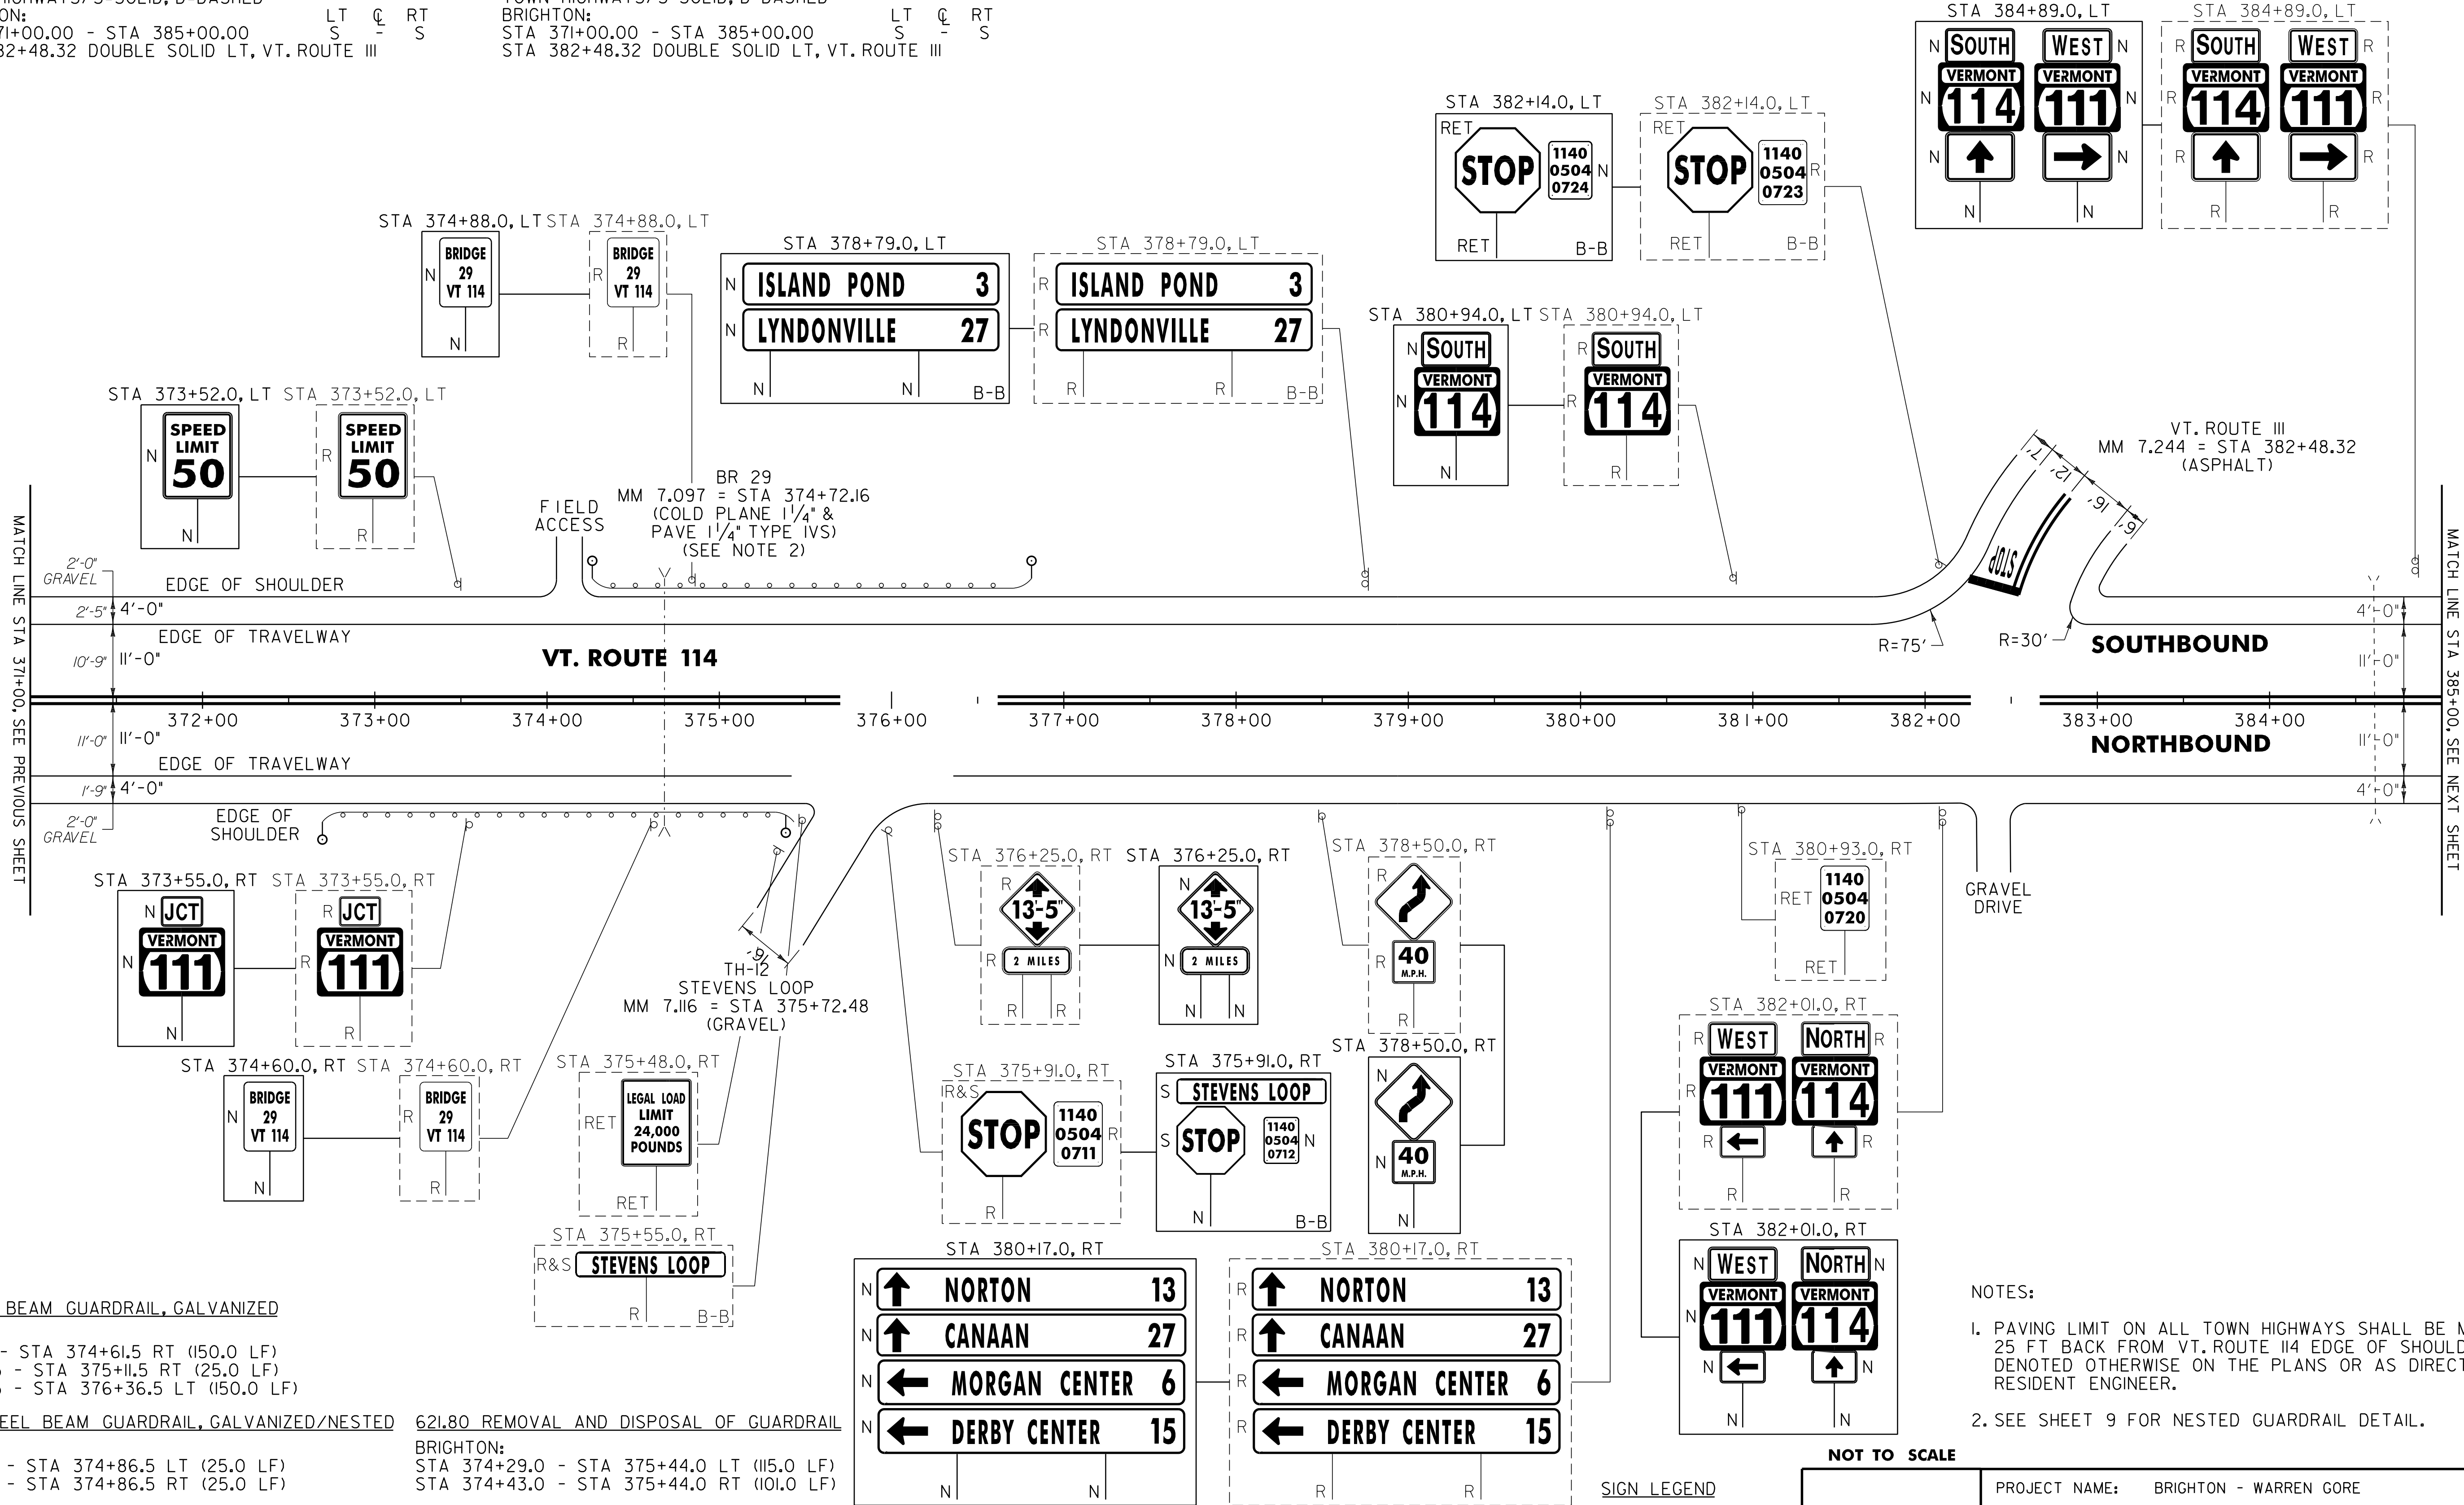


621.20 STEEL BEAM GUARDRAIL, GALVANIZED
 BRIGHTON:
 STA 373+11.5 - STA 374+61.5 RT (150.0 LF)
 STA 374+86.5 - STA 375+11.5 RT (25.0 LF)
 STA 374+86.5 - STA 376+36.5 LT (150.0 LF)

621.216 HD STEEL BEAM GUARDRAIL, GALVANIZED/NESTED
 BRIGHTON:
 STA 374+61.5 - STA 374+86.5 LT (25.0 LF)
 STA 374+61.5 - STA 374+86.5 RT (25.0 LF)

621.50 MANUFACTURED TERMINAL SECTION, FLARED
 BRIGHTON:
 STA 372+74.0 - STA 373+11.5 RT
 STA 374+24.0 - STA 374+61.5 LT
 STA 375+11.5 - STA 375+49.0 RT
 STA 376+36.5 - STA 376+74.0 LT

621.80 REMOVAL AND DISPOSAL OF GUARDRAIL
 BRIGHTON:
 STA 374+29.0 - STA 375+44.0 LT (115.0 LF)
 STA 374+43.0 - STA 375+44.0 RT (101.0 LF)

676.10 DELINEATOR WITH STEEL POST
 BRIGHTON:
 STA 372+74.0 RT
 STA 374+24.0 LT
 STA 375+49.0 RT
 STA 376+74.0 LT

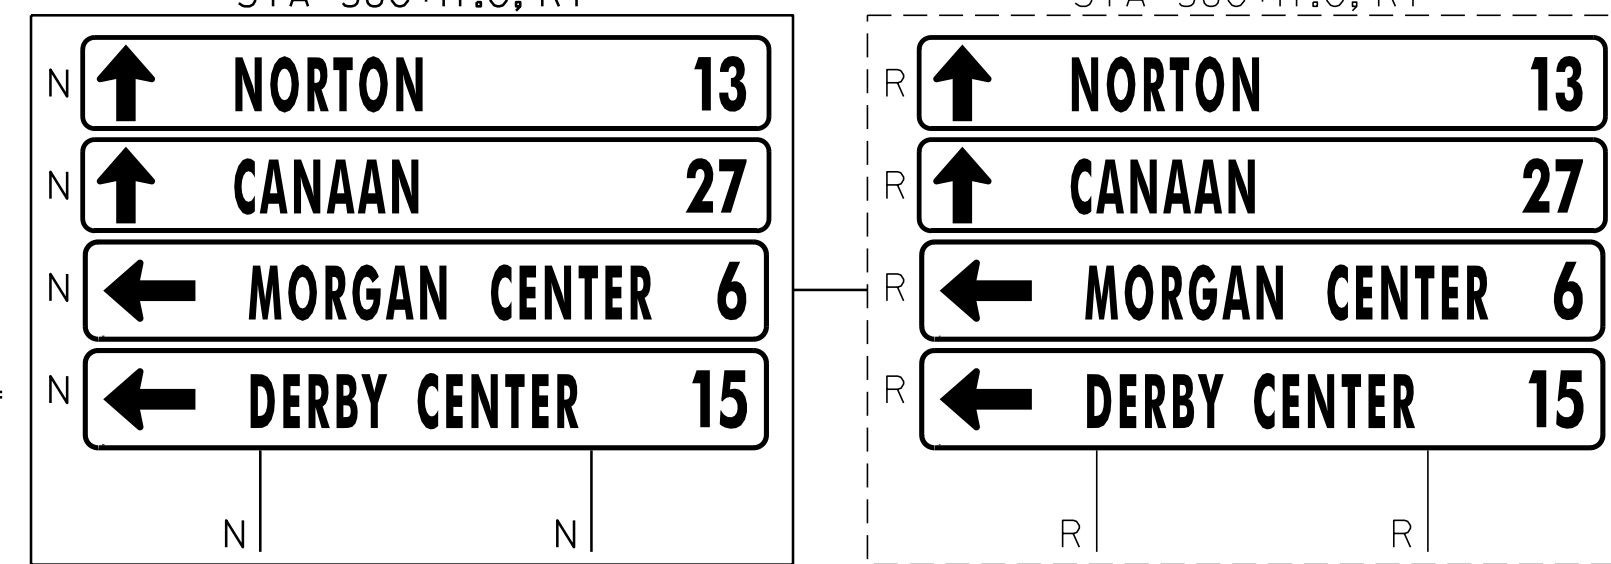

SIGN LEGEND
 R = REMOVE
 S = SALVAGE
 N = NEW
 RET = RETAIN
 B-B = BACK TO BACK
 EXISTING BY: - - - - -
 NEW BY: - - - - -

PROJECT LAYOUT SHEET #8

NOTES:
 1. PAVING LIMIT ON ALL TOWN HIGHWAYS SHALL BE MEASURED 25 FT BACK FROM VT. ROUTE 114 EDGE OF SHOULDER UNLESS DENOTED OTHERWISE ON THE PLANS OR AS DIRECTED BY THE RESIDENT ENGINEER.
 2. SEE SHEET 9 FOR NESTED GUARDRAIL DETAIL.

NOT TO SCALE

PROJECT NAME: BRIGHTON - WARREN GORE	FILE NAME: p07c216.dgn	PLOT DATE: 31-OCT-2011 11:50
PROJECT NUMBER: STP 2724(1)S	PROJECT LEADER: D.E.G.	DRAWN BY: C.A.K.
	DESIGNED BY: M.J.L.	CHECKED BY: D.W.E.
	IPARM FILE: p07c216108.1	SHEET 28 OF 107