

646.402 DURABLE 4 INCH WHITE LINE, THERMOPLASTIC
 (ALL LINES WILL INCLUDE EDGE LINE BREAKS AND
 RADIUS FOR TOWN HIGHWAYS)

BRIGHTON:
 STA 385+00.00 - STA 390+19.20 EDGE LINE LT & RT

MORGAN:
 STA 0+00.00 - STA 10+00.00 EDGE LINE LT & RT

646.412 DURABLE 4 INCH YELLOW LINE, THERMOPLASTIC
 (ALL LINES WILL INCLUDE C/L BREAKS FOR
 TOWN HIGHWAYS) S=SOLID, D=DASHED

BRIGHTON: LT CL RT
 STA 385+00.00 - STA 390+19.20 S - S

MORGAN: S - S
 STA 0+00.00 - STA 10+00.00

646.602 TEMPORARY 4 INCH WHITE LINE, PAINT
 (ALL LINES WILL INCLUDE EDGE LINE BREAKS AND
 RADIUS FOR TOWN HIGHWAYS)

BRIGHTON: STA 385+00.00 - STA 390+19.20 EDGE LINE LT & RT

MORGAN: STA 0+00.00 - STA 10+00.00 EDGE LINE LT & RT

646.612 TEMPORARY 4 INCH YELLOW LINE, PAINT
 (ALL LINES WILL INCLUDE C/L BREAKS FOR
 TOWN HIGHWAYS) S=SOLID, D=DASHED

BRIGHTON: LT CL RT
 STA 385+00.00 - STA 390+19.20 S - S

MORGAN: S - S
 STA 0+00.00 - STA 10+00.00

675.50 REMOVING SIGNS
 AS SHOWN - 10

STA 386+85.0, LT

N	↑	ISLAND POND	3
N	↑	LYNDONVILLE	27
N	→	MORGAN CENTER	6
N	→	DERBY CENTER	15

STA 386+85.0, LT

R	↑	ISLAND POND	3
R	↑	LYNDONVILLE	27
R	→	MORGAN CENTER	6
R	→	DERBY CENTER	15


STA 388+82.0, LT STA 388+82.0, RT

N	JCT	VERMONT	111
N			
R	JCT	VERMONT	111
R			

CURVE II
 PC = STA 389+17.60
 PT = STA 3+65.61
 R = 650'
 SEE SHEETS 46 & 47
 FOR SUPERELEVATION
 BANKING TABLE

STA 0+00.0, LT

N	BRIGHTON	MORGAN
N	ESSEX CO	ORLEANS CO
N	1140 0504 0739	
N	1140 1014 0000	

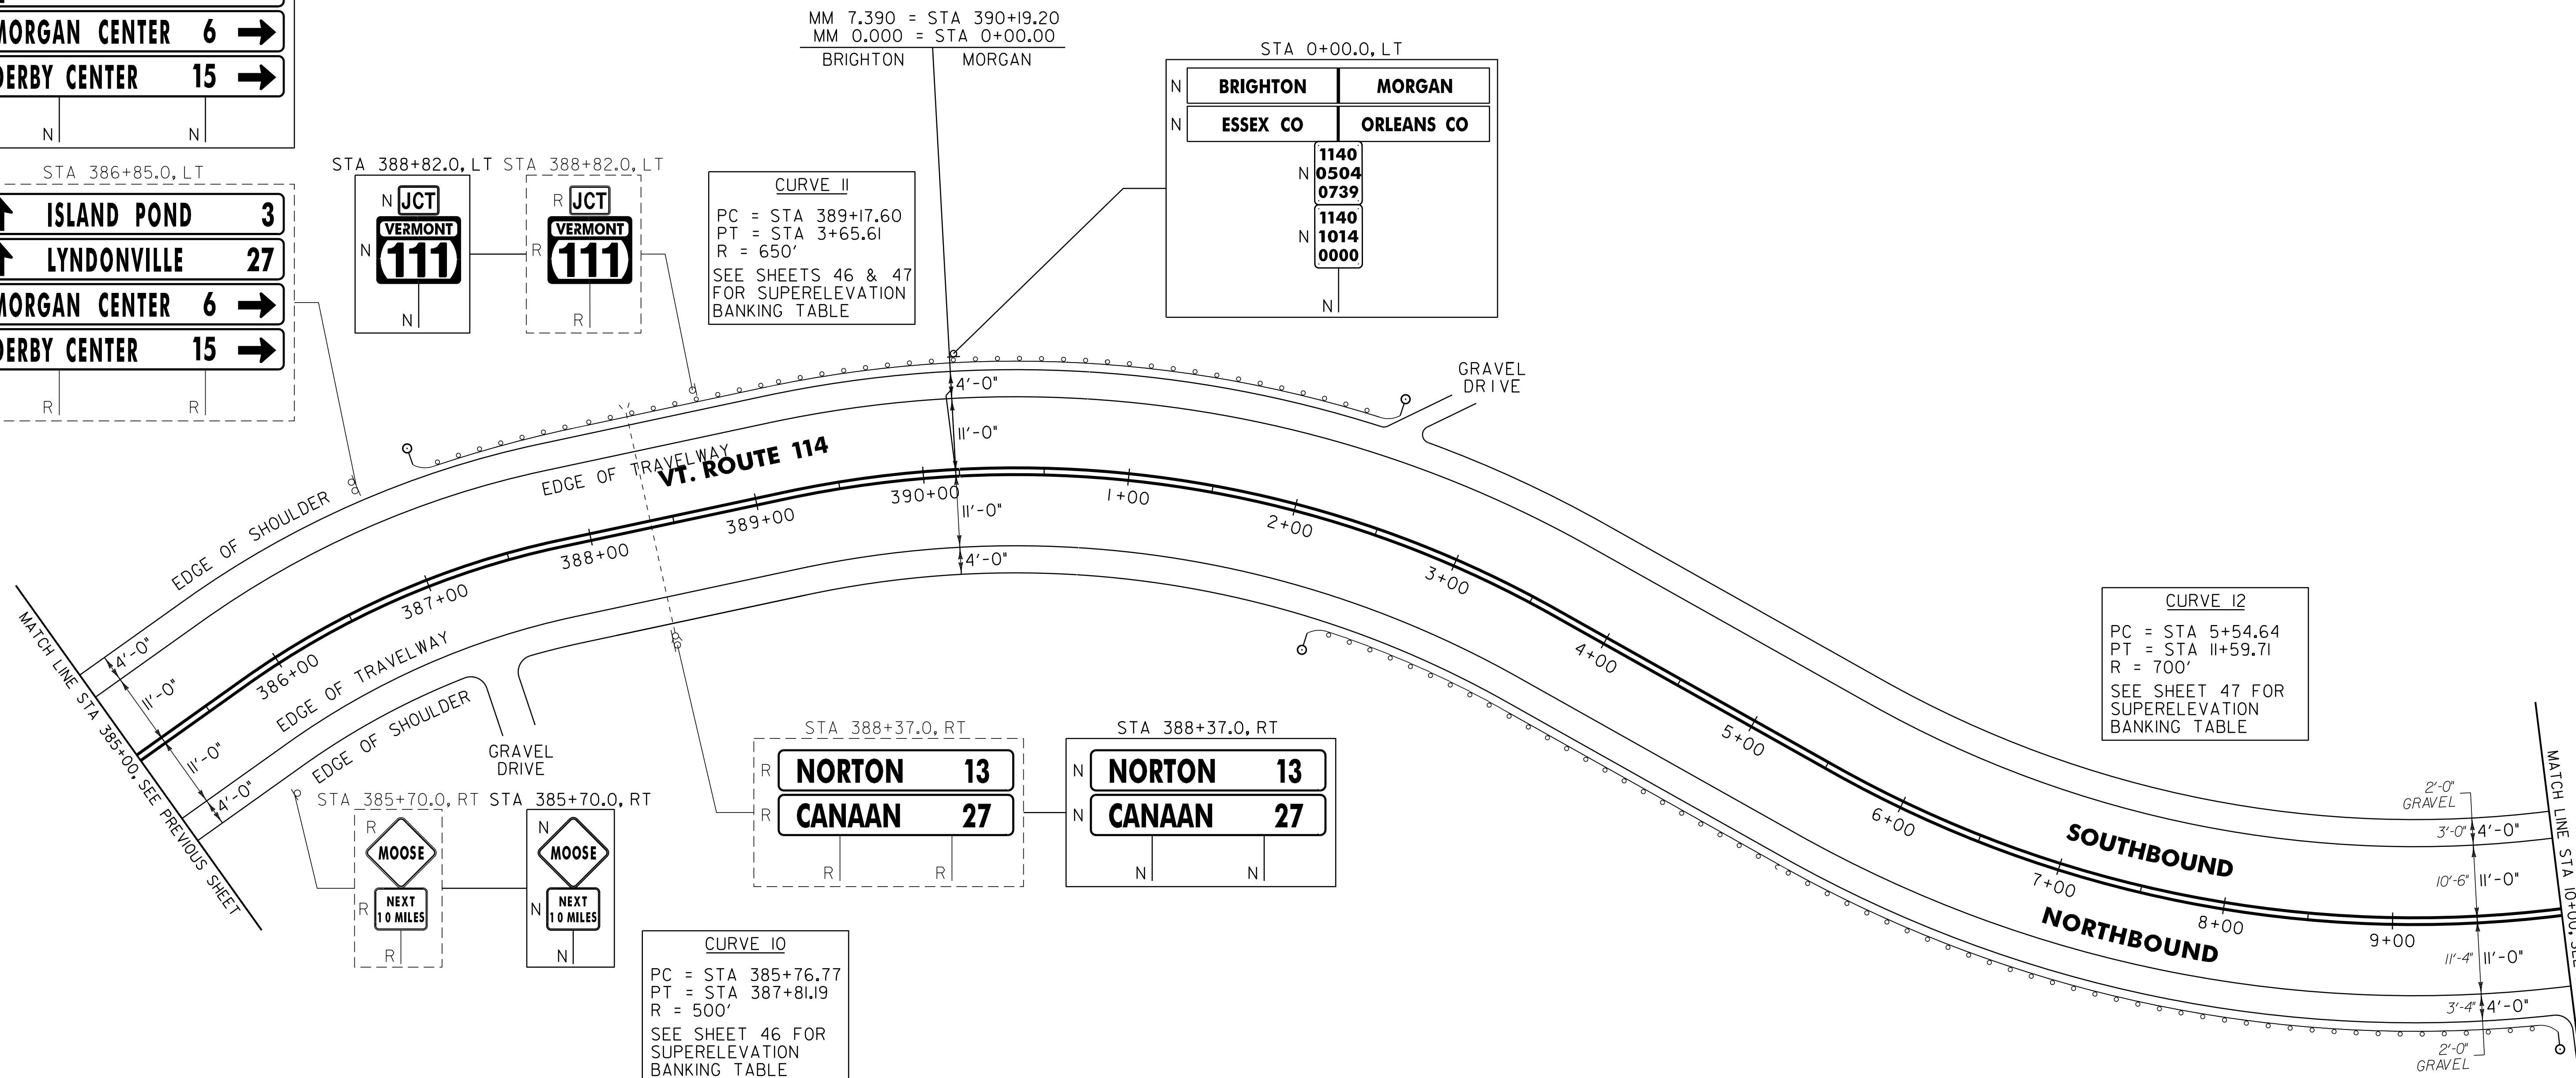

621.20 STEEL BEAM GUARDRAIL, GALVANIZED
 BRIGHTON:
 STA 387+53.2 - STA 390+19.2 LT (266.0 LF)

MORGAN:
 STA 0+00.0 - STA 2+09.0 LT (209.0 LF)

621.205 STEEL BEAM GUARDRAIL, GALVANIZED W/8 FEET POSTS
 MORGAN:
 STA 2+64.0 - STA 9+51.5 RT (687.5 LF)

621.50 MANUFACTURED TERMINAL SECTION, FLARED
 BRIGHTON:
 STA 387+15.7 - STA 387+53.2 LT

MORGAN:
 STA 2+09.0 - STA 2+46.5 LT
 STA 2+26.5 - STA 2+64.0 RT
 STA 9+51.5 - STA 9+89.0 RT

621.80 REMOVAL AND DISPOSAL OF GUARDRAIL
 BRIGHTON:
 STA 387+47.0 - STA 390+19.2 LT (272.2 LF)

MORGAN:
 STA 0+00.0 - STA 2+46.5 LT (246.5 LF)
 STA 2+29.5 - STA 9+88.5 RT (759.0 LF)

676.10 DELINEATOR WITH STEEL POST
 BRIGHTON:
 STA 387+15.7 LT

MORGAN:
 STA 2+26.5 RT
 STA 2+46.5 LT
 STA 9+89.0 RT

SIGN LEGEND
 R = REMOVE
 S = SALVAGE
 N = NEW
 RET = RETAIN
 B-B = BACK TO BACK
 EXISTING = - - - - -
 NEW = _____

NOT TO SCALE

PROJECT LAYOUT SHEET #9	PROJECT NAME: BRIGHTON - WARREN GORE	PLOT DATE: 31-OCT-2011 11:50
	PROJECT NUMBER: STP 2724(1)S	DRAWN BY: C.A.K.
	FILE NAME: p07c216.dgn	CHECKED BY: D.W.E.
	DESIGNED BY: M.J.L.	SHEET 29 OF 107