LOCATION				FEET OF DITCHING			MISCELLANEOUS ITEMS				REMARKS
							613.10	649.31	651.15	653.20	
SITE	STATION	STATION	POS.	PERCENT GRADE			STONE FILL, TYPE I	GEOT. UNDER STONE FILL	SEED	TEMP. EROS. MATT.	
				0-2.5	2.5-10	>10	CY	SY	LB	SY	
U.S. ROUTE 5											
NEWPORT											
1	0+00	5+19	LT	519			0	0	4	231	
2	1+68	2+86	RT	118			0	0	1	52	
3	3+34	12+10	RT	876			0	0	6	389	
4	5+28	13+84	LT	856			0	0	6	380	
5	12+59	14+82	RT	223			0	0	2	99	
6	14+03	15+84	LT	181			0	0	1	80	
7	15+84	16+70	LT		86		13	57	0	0	
8	145+70	147+84	LT		214		32	143	0	0	
9	147+84	152+62	LT	478			0	0	4	212	
10	157+53	158+40	LT	87			0	0	1	39	
11	158+40	164+35	LT		595		88	397	0	0	
TOTALS				3338	895		133*	597*	25*	1482*	*QUANTITY TOTALS CARRIED FORWARD TO ITEM DETAIL SUMMARY, SHEETS 7 & 8.

LOCATION				FEET OF DITCHING			MISCELLANEOUS ITEMS				REMARKS
							613.10	649.31	651.15	653.20	
SITE	STATION	STATION	POS.	PERCENT GRADE			STONE FILL, TYPE I	GEOT. UNDER STONE FILL	SEED	TEMP. EROS. MATT.	
				0-2.5	2.5-10	>10	CY	SY	LB	SY	

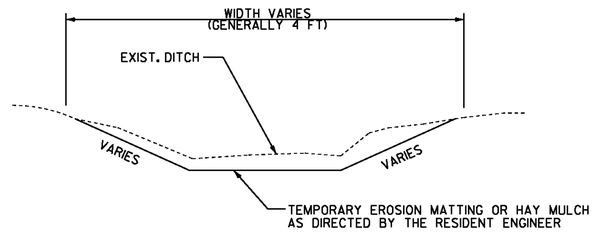

DITCH DETAIL < 2.5 PERCENT

NOT TO SCALE

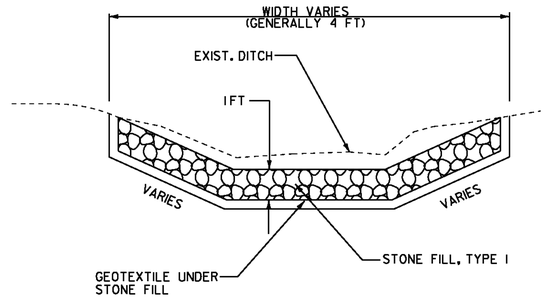

DITCH DETAIL > 2.5 PERCENT

NOT TO SCALE

STONE DITCH DETAIL

NOTES:

1. PIPE INLET AND OUTLET AREAS AND DITCH CLEANING THROUGHOUT THE PROJECT SHALL BE PERFORMED AT LOCATIONS IDENTIFIED ON THIS SHEET AND AS DIRECTED BY THE RESIDENT ENGINEER. PAYMENT WILL BE UNDER THE APPLICABLE EQUIPMENT RENTAL ITEM(S).

2. GRADES BETWEEN 0 AND 2.5 PERCENT SHALL USE ITEM 651.15, SEED AND ITEM 651.25, HAY MULCH OR ITEM 653.20, TEMPORARY EROSION MATTING AS DIRECTED BY THE RESIDENT ENGINEER. GRADES 2.5 PERCENT OR GREATER SHALL USE ITEM 649.31, GEOTEXTILE UNDER STONE FILL AND ITEM 613.10, STONE FILL TYPE I AS DIRECTED BY THE RESIDENT ENGINEER.

NOT TO SCALE

Stantec

DITCH CLEANING DETAIL SHEET

PROJECT NAME: NEWPORT CITY
PROJECT NUMBER: STP 2704(1)

FILE NAME: p07d196.dgn
PROJECT LEADER: JLL
DESIGNED BY: STANTEC
IPARM FILE: p07d196dcs.i

PLOT DATE: 03-APR-2012
DRAWN BY: STANTEC
CHECKED BY: STANTEC
SHEET 17 OF 91