

604.412, 604.415 OR 604.418 REHAB.
DIS. CBS OR MHS, CLASS 1, II OR III

STA. 18+65, RT
STA. 18+81, RT
STA. 18+96, LT
STA. 19+19, RT

618.10 PORTLAND CEMENT CONCRETE SIDEWALK, 5 INCH

STA. 18+81, RT
STA. 19+07, RT

618.30 DETECTABLE WARNING SURFACE

STA. 18+81, RT
STA. 19+07, RT

646.402 DURABLE 4 INCH WHITE LINE, THERMOPLASTIC
(ALL LINES WILL INCLUDE EDGE LINE BREAKS AND
RADI1 FOR SIDE ROADS)

STA. 13+50 TO 19+50, SOLID LT & RT

646.412 DURABLE 4 INCH YELLOW LINE, THERMOPLASTIC
(ALL LINES WILL INCLUDE C BREAKS FOR SIDE ROADS)

STA. 13+50 TO 19+50, SOLID LT & RT
STA. 18+93, DOUBLE SOLID RT (HIGHLAND AVE. CENTERLINE)

646.482 DURABLE 24 INCH STOP BAR, THERMOPLASTIC

STA. 19+00, RT (HIGHLAND AVE.)

646.492 DURABLE LETTER OR SYMBOL, THERMOPLASTIC

STA. 19+00, RT - "STOP"

646.502 DURABLE CROSSWALK MARKING, THERMOPLASTIC

STA. 18+83 TO 19+05, RT

646.602 TEMPORARY 4 INCH WHITE LINE, PAINT
(ALL LINES WILL INCLUDE EDGE LINE BREAKS AND
RADI1 FOR SIDE ROADS)

STA. 13+50 TO 19+50, SOLID LT & RT

646.612 TEMPORARY 4 INCH YELLOW LINE, PAINT
(ALL LINES WILL INCLUDE C BREAKS FOR SIDE ROADS)

STA. 13+50 TO 19+50, SOLID LT & RT
STA. 18+93, DOUBLE SOLID RT (HIGHLAND AVE. CENTERLINE)

646.682 TEMPORARY 24 INCH STOP BAR, PAINT

STA. 19+00, RT (HIGHLAND AVE.)

646.692 TEMPORARY LETTER OR SYMBOL, PAINT


STA. 19+00, RT - "STOP"

646.702 TEMPORARY CROSSWALK MARKING, PAINT

STA. 18+83 TO 19+05, RT

675.50 REMOVING SIGNS
AS SHOWN - 4

675.60 ERECTING SALVAGED SIGNS
AS SHOWN - 2

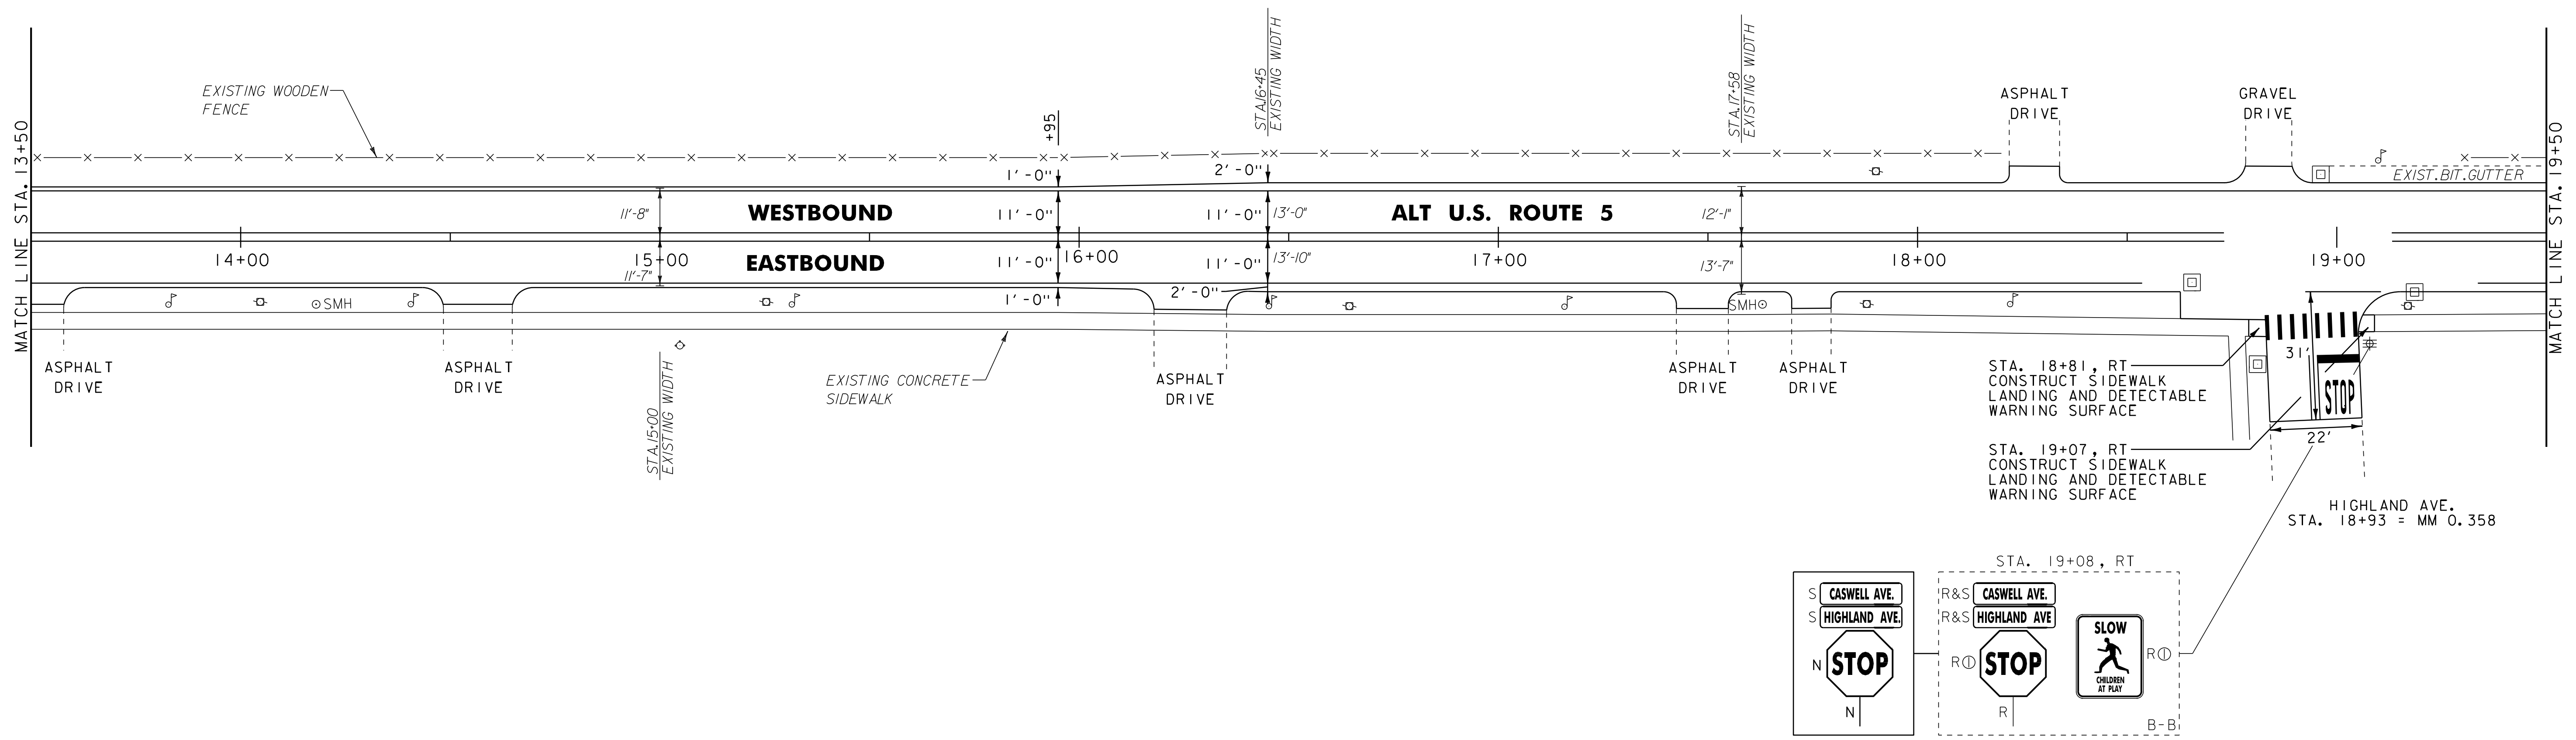

NOTE:

- FOR LEGENDS, SEE LAYOUT SHEET #1.
- ALL EXISTING SIGNS NOT SHOWN SHALL BE RETAINED.

NOT TO SCALE

**PROJECT
LAYOUT
SHEET #11**

PROJECT NAME: DERBY
PROJECT NUMBER: STP 2703(1)

FILE NAME: 07D202.dgn
PROJECT LEADER: JLL
DESIGNED BY: STANTEC
IPARM FILE: 07C194_44.i

PLOT DATE: 29-JAN-2013 09:2
DRAWN BY: STANTEC
CHECKED BY: JLL
SHEET 44 OF 62