

604.42 CHANGING ELEVATION OF SEWER MANHOLES  
STA. 23+74, RT

629.20 ADJUST ELEVATION OF VALVE BOX  
STA. 23+82, LT  
STA. 23+82, RT

646.402 DURABLE 4 INCH WHITE LINE, THERMOPLASTIC  
(ALL LINES WILL INCLUDE EDGE LINE BREAKS AND RADI FOR SIDE ROADS)  
STA. 19+50 TO 25+50, SOLID LT & RT  
STA. 24+88, SOLID RT (SB ON/OFF RAMP B EDGELINES)

646.412 DURABLE 4 INCH YELLOW LINE, THERMOPLASTIC  
(ALL LINES WILL INCLUDE C BREAKS FOR SIDE ROADS)  
STA. 19+50 TO 25+50, SOLID LT & RT  
STA. 23+88, DOUBLE SOLID RT (MAPLE ST. CENTERLINE)  
STA. 24+88, DOUBLE SOLID RT (SB ON/OFF RAMP B CENTERLINE)

646.482 DURABLE 24 INCH STOP BAR, THERMOPLASTIC  
STA. 23+94, RT (MAPLE ST.)  
STA. 24+90, RT (SB ON/OFF RAMP B)

646.492 DURABLE LETTER OR SYMBOL, THERMOPLASTIC  
STA. 23+94, RT - "STOP"  
STA. 24+89, RT - "STOP"

646.602 TEMPORARY 4 INCH WHITE LINE, PAINT  
(ALL LINES WILL INCLUDE EDGE LINE BREAKS AND RADI FOR SIDE ROADS)  
STA. 19+50 TO 25+50, SOLID LT & RT  
STA. 24+88, SOLID RT (SB ON/OFF RAMP B EDGELINES)



646.612 TEMPORARY 4 INCH YELLOW LINE, PAINT  
(ALL LINES WILL INCLUDE C BREAKS FOR SIDE ROADS)  
STA. 19+50 TO 25+50, SOLID LT & RT  
STA. 23+88, DOUBLE SOLID RT (MAPLE ST. CENTERLINE)  
STA. 24+88, DOUBLE SOLID RT (SB ON/OFF RAMP B CENTERLINE)

646.682 TEMPORARY 24 INCH STOP BAR, PAINT  
STA. 23+94, RT (MAPLE ST.)  
STA. 24+90, RT (SB ON/OFF RAMP B)

646.692 TEMPORARY LETTER OR SYMBOL, PAINT  
STA. 23+94, RT - "STOP"  
STA. 24+89, RT - "STOP"

675.50 REMOVING SIGNS  
AS SHOWN - 9

675.60 ERECTING SALVAGED SIGNS  
AS SHOWN - 4

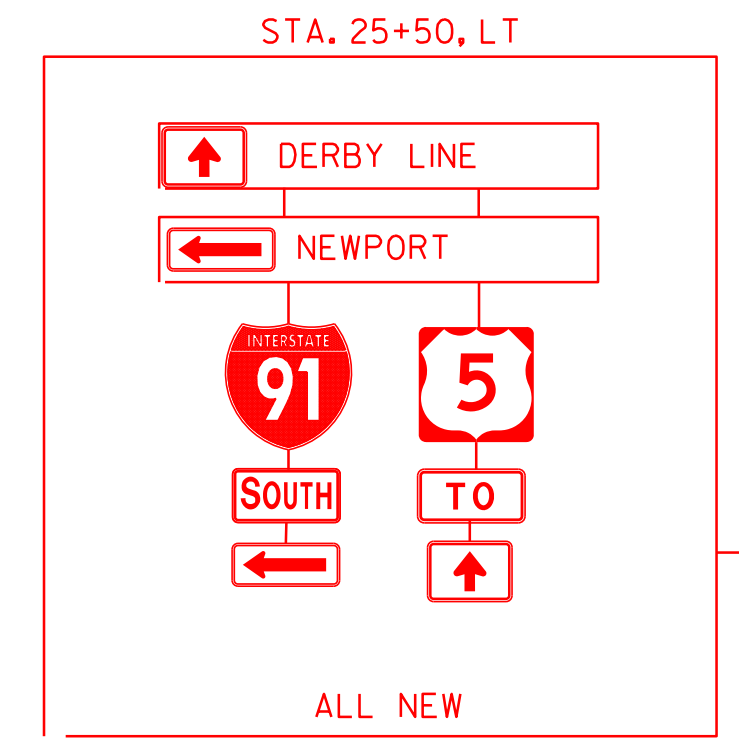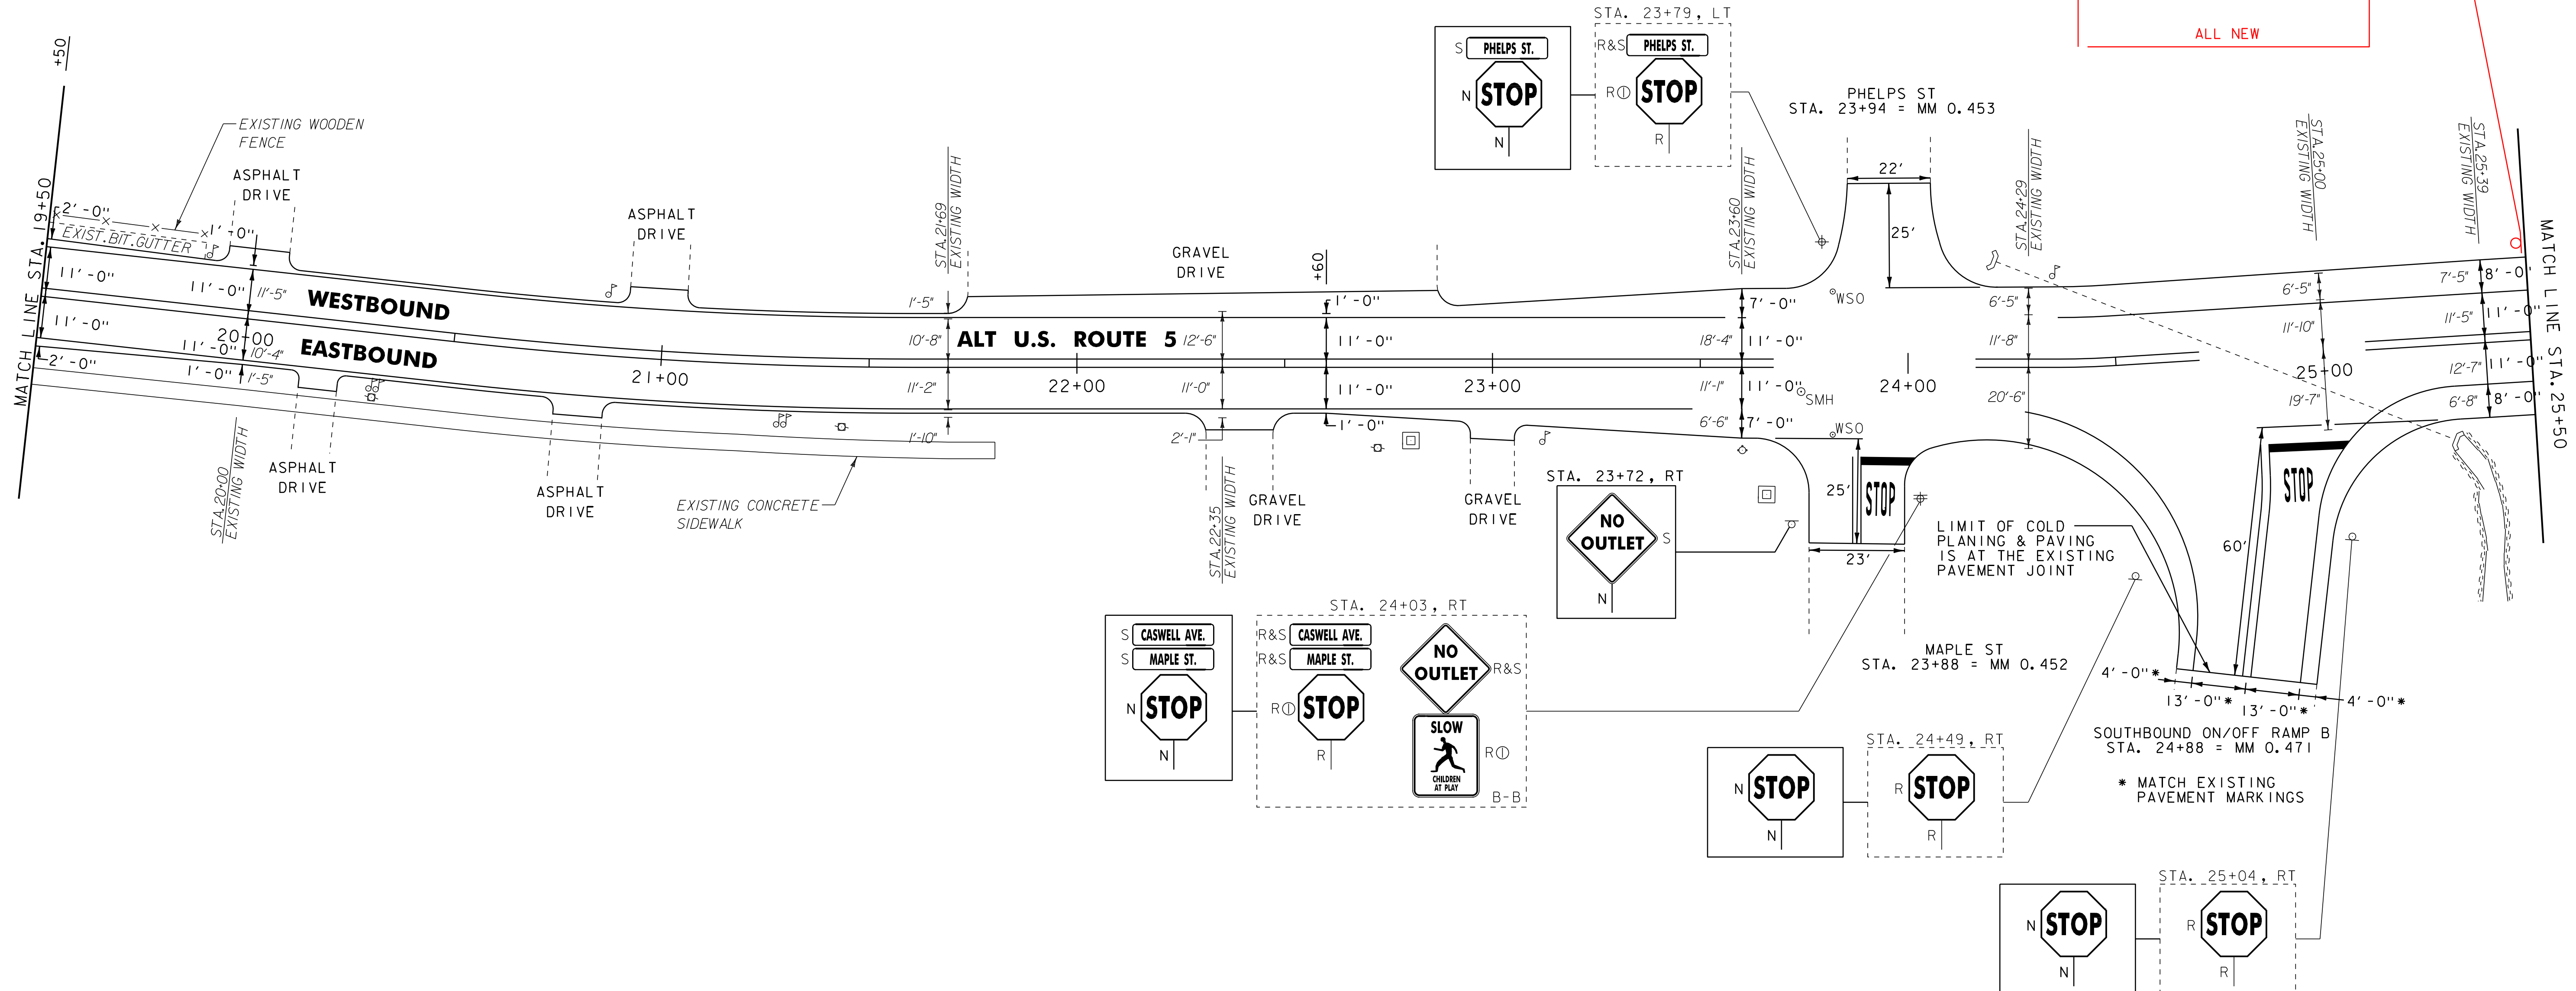

- NOTE:
1. FOR LEGENDS, SEE LAYOUT SHEET #1.
  2. ALL EXISTING SIGNS NOT SHOWN SHALL BE RETAINED.

NOT TO SCALE

**PROJECT LAYOUT SHEET #12**

PROJECT NAME: DERBY  
PROJECT NUMBER: STP 2703(1)

FILE NAME: 07D202.dgn  
PROJECT LEADER: JLL  
DESIGNED BY: STANTEC  
IPARM FILE: 07C194\_45.i

PLOT DATE: 29-JAN-2013 09:2  
DRAWN BY: STANTEC  
CHECKED BY: JLL  
SHEET 45 OF 62