

PROJECT DEMARCATION FENCE	
STA. 94+25.00, LT. - STA. 95+35.83, LT. (123')	
STA. 97+35.29, LT. - STA. 99+00.00, LT. (172')	
STA. 95+64.66, RT. - STA. 61+75.00, LT. (132')	
STA. 61+75.00, RT. - STA. 99+00.00, RT. (268')	
BARRIER FENCE	
STA. 95+35.83, LT. - STA. 41+75.00, LT. (141')	
STA. 94+25.00, RT. - STA. 95+64.66, RT. (129')	
TEMPORARY EROSION MATTING	
STA. 94+25.00, LT. - STA. 94+40.00, LT.	
STA. 94+25.00, RT. - STA. 95+27.94, RT.	
STA. 97+04.42, LT. - STA. 99+00.00, LT.	
STA. 97+43.63, RT. - STA. 99+00.00, RT.	
STA. 62+21.38, RT. - STA. 97+26.90, RT.	
STA. 97+04.42, LT. - STA. 40+62.63, RT.	
STA. 40+73.80, RT. - STA. 41+05.20, RT.	
STA. 41+30.00, RT. - STA. 41+75.00, RT.	
STA. 41+65.00, LT. - STA. 41+75.00, LT.	
PIPE INLET PROTECTION	
STA. 40+65.5, 38.4' RT.	
STA. 95+55.1, 73.1' LT.	



PREFABRICATED CHECK DAM	
STA. 94+50.00, LT. - STA. 94+40.00, LT.	
STA. 97+04.42, LT. - STA. 99+00.00, LT.	
STA. 97+43.63, RT. - STA. 99+00.00, RT.	
STA. 62+21.38, RT. - STA. 97+26.90, RT.	
STA. 40+73.80, RT. - STA. 41+05.20, RT.	
STA. 41+30.00, RT. - STA. 41+75.00, RT.	
STA. 41+65.00, LT. - STA. 41+75.00, LT.	
GEOTEXTILE FOR SILT FENCE	
STA. 94+25.00, RT. - STA. 95+23.83, RT.	
STA. 61+75.00, LT. - STA. 61+80.34, LT.	
STA. 41+06.04, LT. - STA. 41+52.33, LT.	
INLET PROTECTION, TYPE I	
STA. 40+65.6, 26.9' RT. STA. 94+47.4, 29.6' LT.	
STA. 40+66.2, 26.1' LT. STA. 95+31.1, 16.5' RT.	
STA. 41+29.0, 22.4' RT. STA. 95+31.8, 16.7' LT.	
STA. 62+22.5, 12.6' RT. STA. 95+65.7, 24.3' LT.	
STA. 62+51.2, 15.6' RT. STA. 95+70.2, 25.6' RT.	
STA. 62+90.4, 25.9' LT. STA. 97+01.9, 27.3' LT.	
STA. 62+95.0, 25.8' RT. STA. 97+02.0, 26.1' RT.	
STA. 63+12.9, 43.9' LT. STA. 97+43.1, 31.9' RT.	

BOOTHBAY SILT LOAM
8% TO 15% SLOPES
K = 0.32
HYDRO. GROUP = C

ADAMS LOAMY FINE SAND
8% TO 15% SLOPES
K = 0.17
HYDRO. GROUP = A

EPSC LEGEND			
	INLET PROTECTION, TYPE I		PERMANENT EROSION MATTING
	PIPE INLET PROTECTION		TEMPORARY EROSION MATTING
	SOIL TYPE BOUNDARY		DRAINAGE RIPRAP
	AGRICULTURAL SOILS BOUNDARY		GRASS CHANNEL
	ARCHEOLOGICAL BOUNDARY		
	LIMITS OF CONSTRUCTION (SOIL DISTURBANCE)		
	BARRIER FENCE		
	PROJECT DEMARCATION		
	PREFABRICATED CHECK DAMS		
	SILT FENCE		

- NOTES:**
1. THESE PLANS SHOW A CONCEPTUAL EROSION PLAN. THE CONTRACTOR MUST SUBMIT A TEMPORARY EROSION CONTROL PLAN FOR APPROVAL.
 2. TEMPORARY EROSION CONTROL MEASURES ARE CONCEPTUALLY SHOWN. THE CONTRACTOR MAY RELOCATE TEMPORARY MEASURES TO IMPROVE EROSION CONTROL WITH APPROVAL OF THE RESIDENT ENGINEER AND ON SITE COORDINATOR. SILT FENCE SHALL NOT BE INSTALLED ACROSS CONTOURS.
 3. THE CONTRACTOR SHALL USE OTHER TEMPORARY EROSION CONTROL MEASURES AS NECESSITATED BY THE SEQUENCE OF CONSTRUCTION OR AS DIRECTED BY THE RESIDENT ENGINEER AND ON SITE COORDINATOR.
 4. REFER TO TEMPORARY EROSION CONTROL DETAIL SHEETS FOR ADDITIONAL DETAILS.

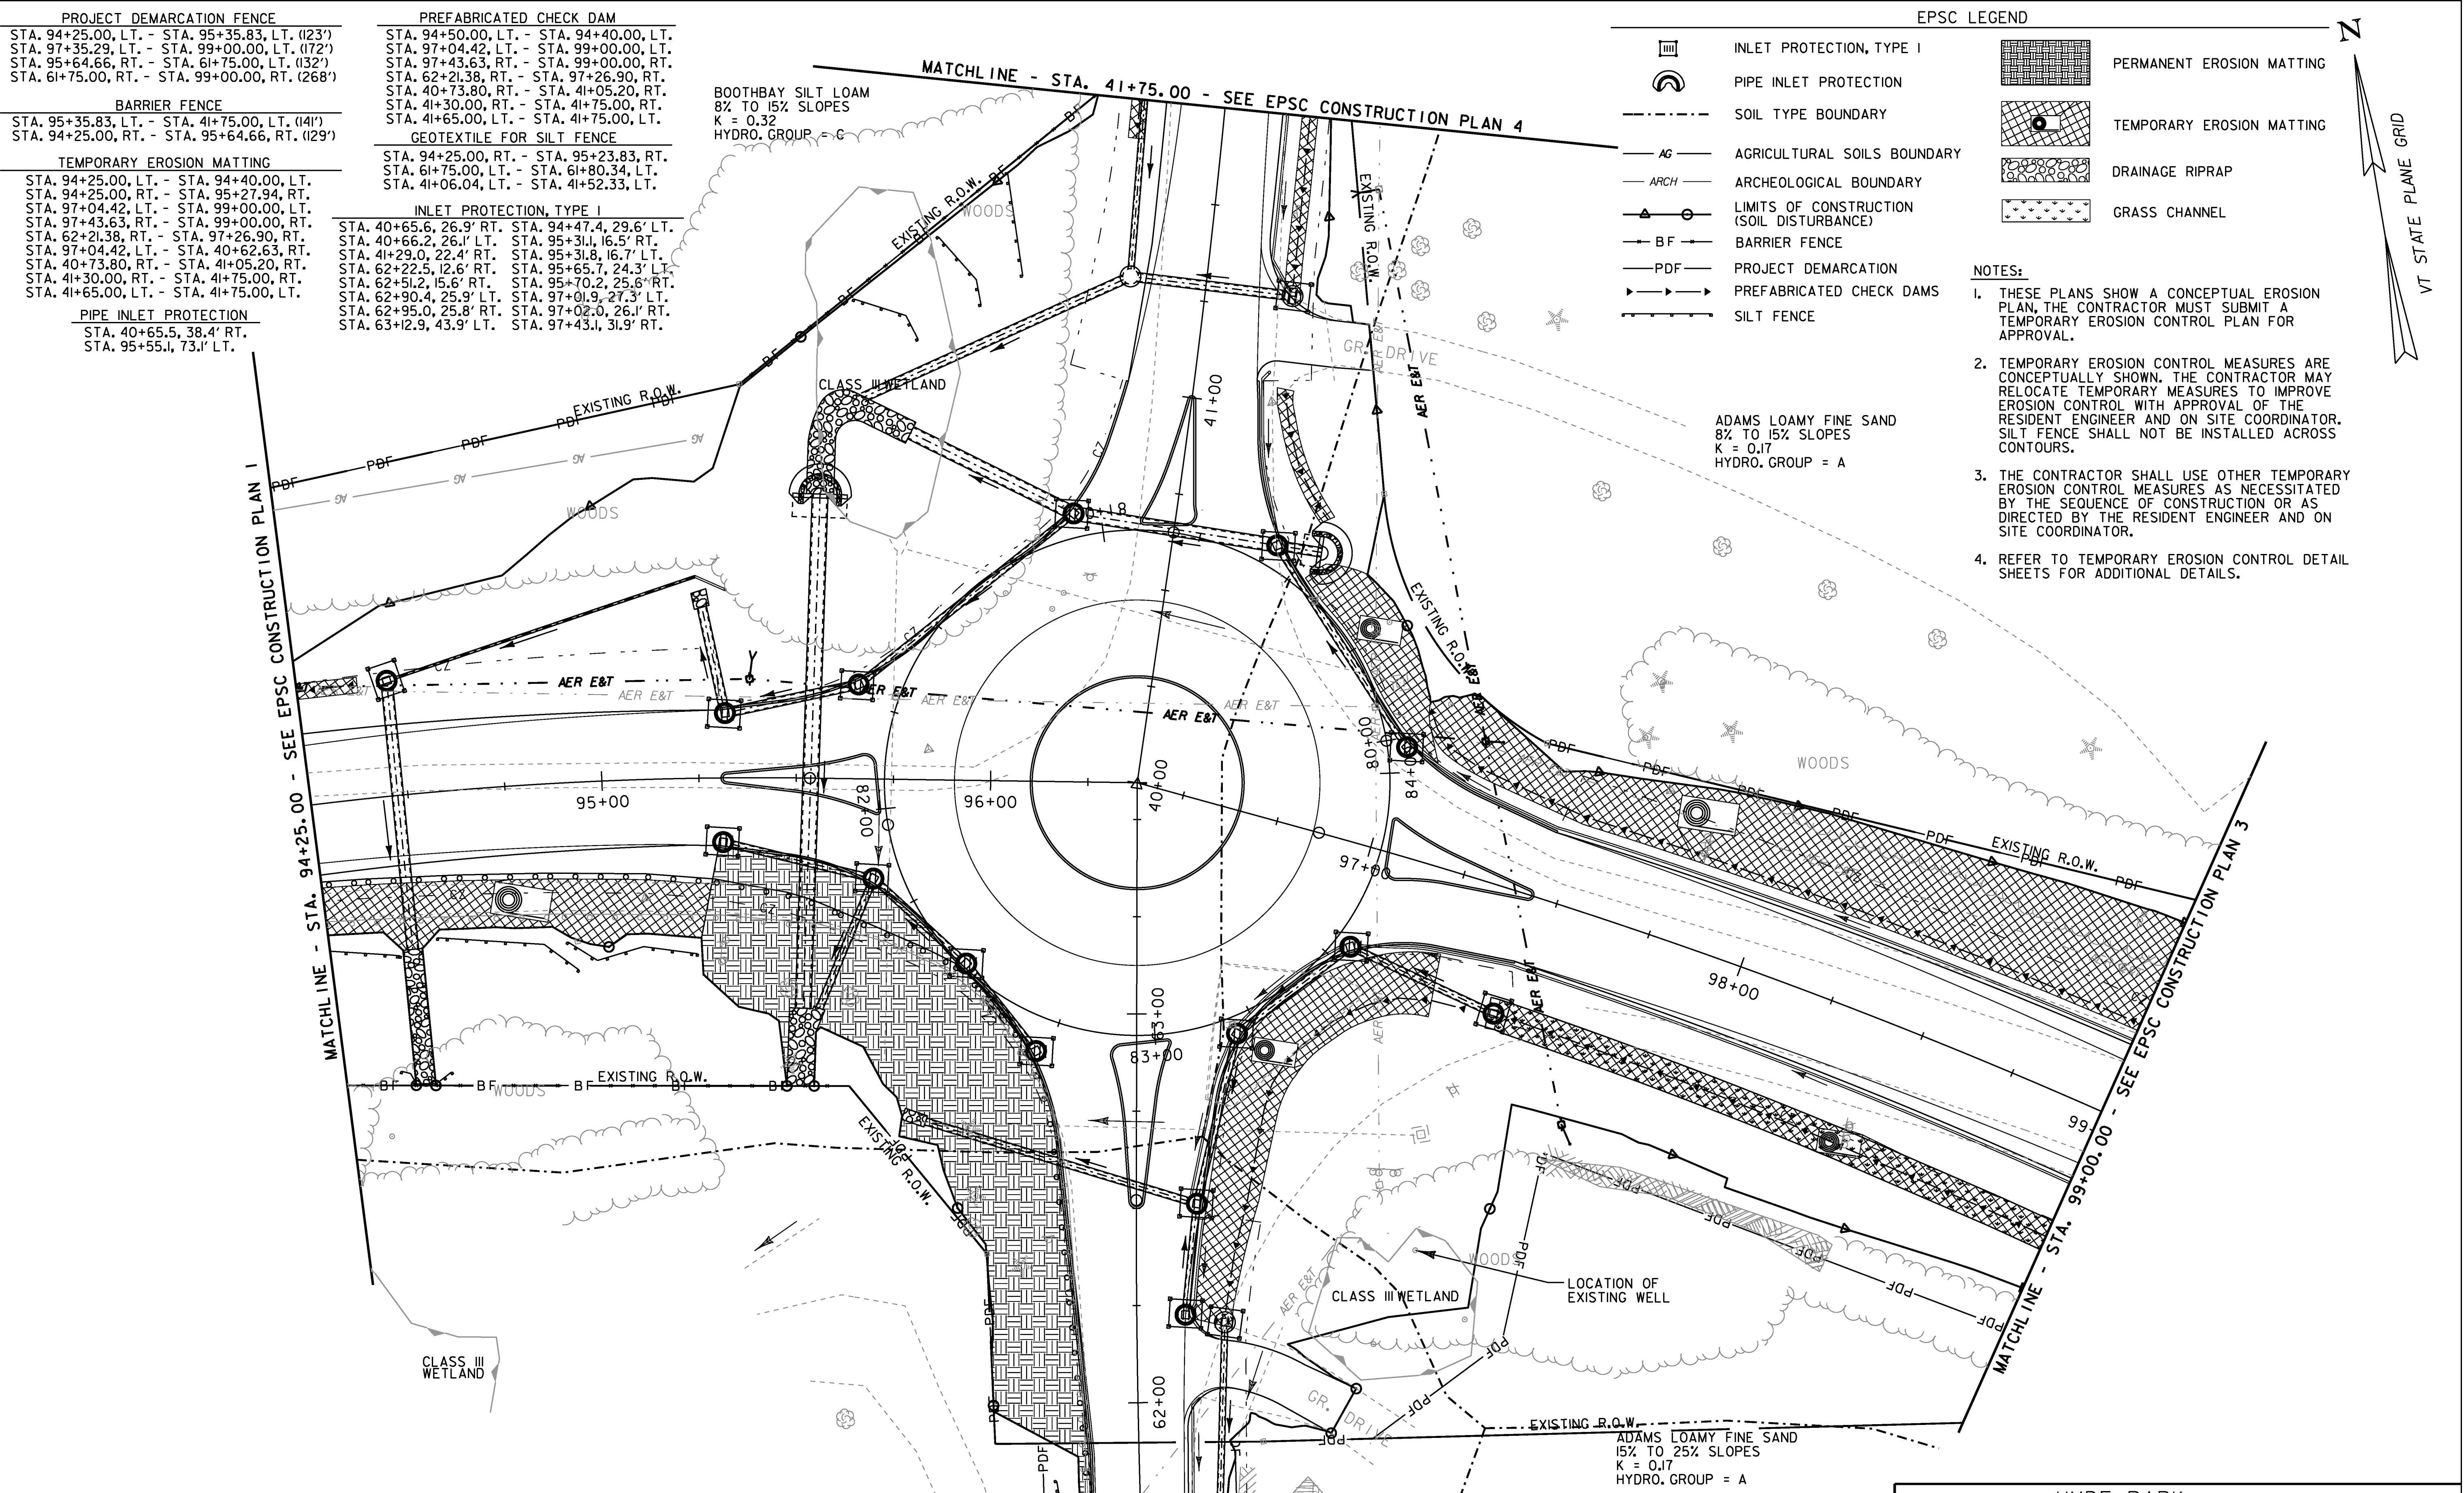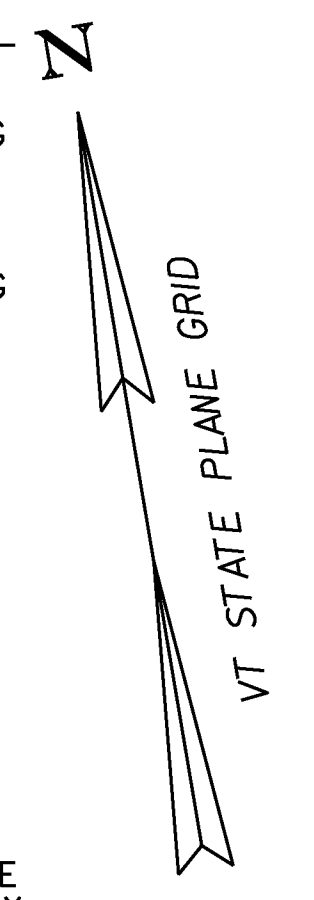

MATCHLINE - STA. 94+25.00 - SEE EPSC CONSTRUCTION PLAN 1

MATCHLINE - STA. 41+75.00 - SEE EPSC CONSTRUCTION PLAN 4

MATCHLINE - STA. 99+00.00 - SEE EPSC CONSTRUCTION PLAN 3

MATCHLINE - STA. 61+75.00 - SEE EPSC CONSTRUCTION PLAN 5

PROJECT NAME: HYDE PARK	PLOT DATE: 08-DEC-2010
PROJECT NUMBER: HES 030-2(23)	DRAWN BY: MBL
FILE NAME: +08b126dr.dgn	CHECKED BY: JAD
PROJECT LEADER: JLS	SHEET 57 OF 100
DESIGNED BY: MBL	
EPSC CONSTRUCTION SITE PLAN 2	

