


646.402 DURABLE 4 INCH WHITE LINE, THERMOPLASTIC  
 (ALL LINES WILL INCLUDE EDGE LINE BREAKS AND RADIUS FOR TOWN HIGHWAYS)  
 RIPTON:  
 STA 206+00.00 - STA 219+00.00 EDGE LINE LT & RT  
 646.412 DURABLE 4 INCH YELLOW LINE, THERMOPLASTIC  
 (ALL LINES WILL INCLUDE C/L BREAKS FOR TOWN HIGHWAYS) S=SOLID, D=DASHED  
 RIPTON:  
 STA 206+00.00 - STA 219+00.00 LT C RT  
 STA 206+00.00 - STA 219+00.00 S - S  
 STA 211+35.84 DOUBLE SOLID LT, TH-20

646.602 TEMPORARY 4 INCH WHITE LINE, PAINT  
 (ALL LINES WILL INCLUDE EDGE LINE BREAKS AND RADIUS FOR TOWN HIGHWAYS)  
 RIPTON:  
 STA 206+00.00 - STA 219+00.00 EDGE LINE LT & RT  
 646.612 TEMPORARY 4 INCH YELLOW LINE, PAINT  
 (ALL LINES WILL INCLUDE C/L BREAKS FOR TOWN HIGHWAYS) S=SOLID, D=DASHED  
 RIPTON:  
 STA 206+00.00 - STA 219+00.00 LT C RT  
 STA 206+00.00 - STA 219+00.00 S - S  
 STA 211+35.84 DOUBLE SOLID LT, TH-20

646.482 DURABLE 24 INCH STOP BAR, THERMOPLASTIC  
 RIPTON:  
 STA 211+35.84 LT, TH-20  
 646.492 DURABLE LETTER OR SYMBOL, THERMOPLASTIC  
 RIPTON:  
 STA 211+35.84 LT, TH-20 "S,T,O,P" (4 EA)  
 646.682 TEMPORARY 24 INCH STOP BAR, PAINT  
 RIPTON:  
 STA 211+35.84 LT, TH-20  
 646.692 TEMPORARY LETTER OR SYMBOL, PAINT  
 RIPTON:  
 STA 211+35.84 LT, TH-20 "S,T,O,P" (4 EA)

675.50 REMOVING SIGNS  
 AS SHOWN - 10  
 675.60 ERECTING SALVAGED SIGNS  
 AS SHOWN - 1

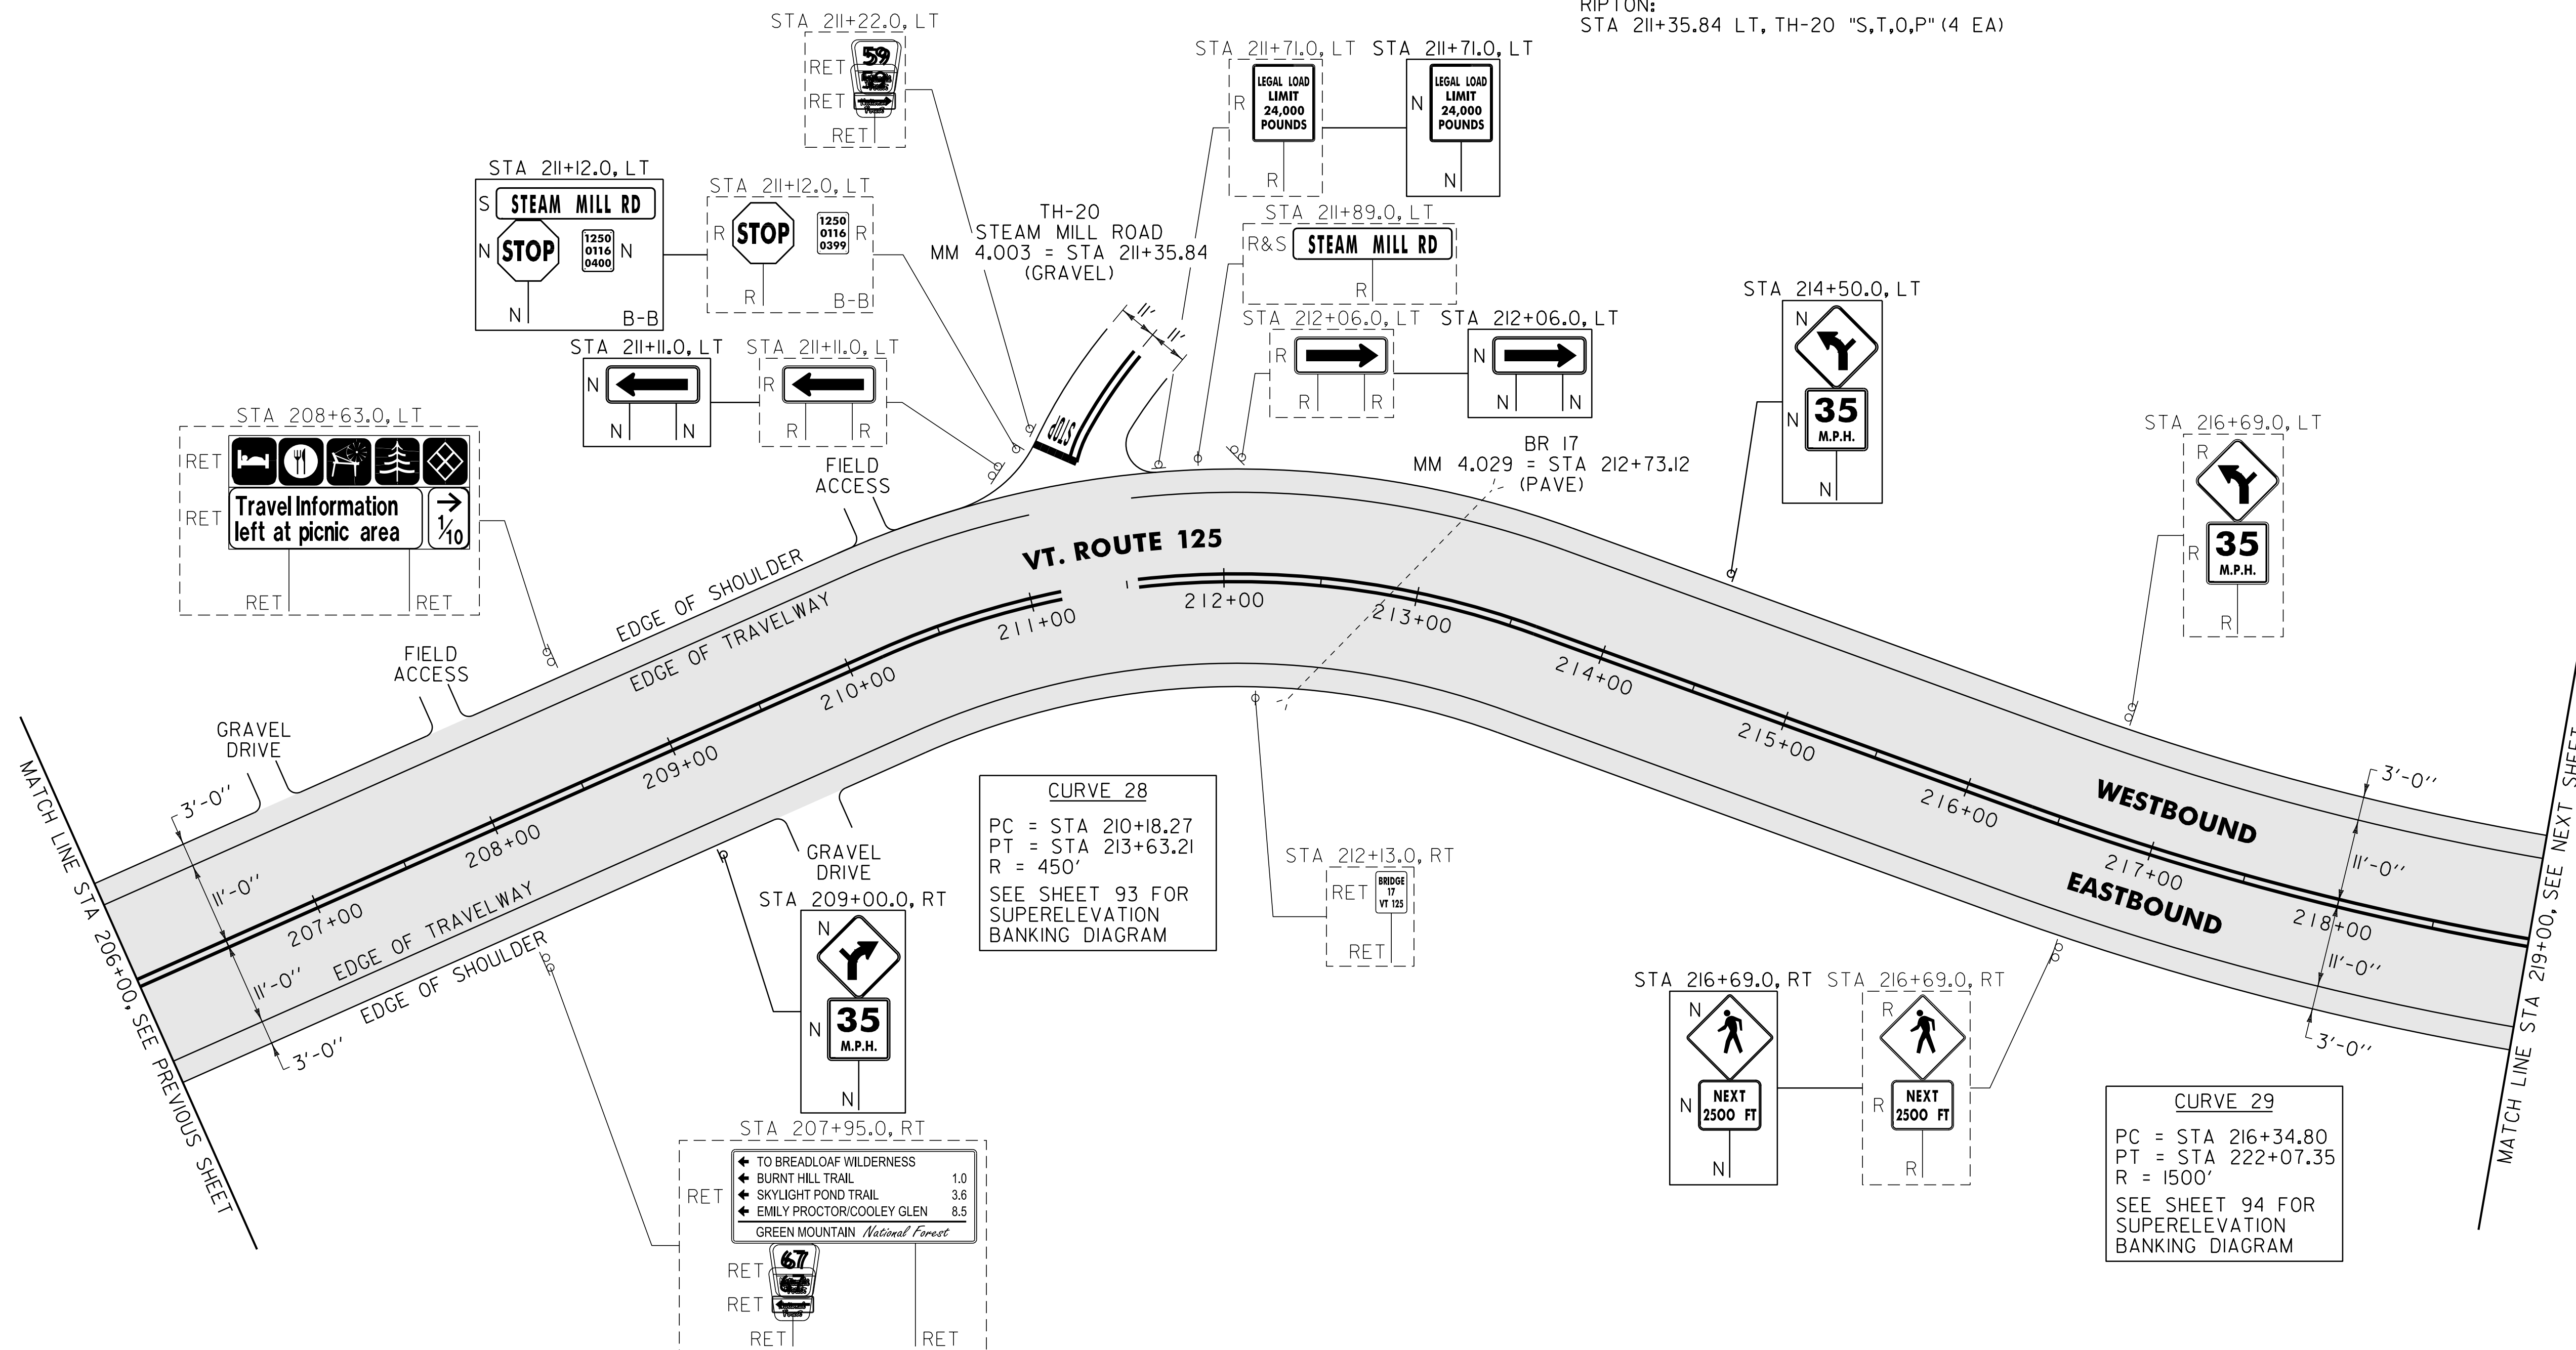

NOTE:  
 1. PAVING LIMIT ON ALL TOWN HIGHWAYS SHALL BE MEASURED 25 FT BACK FROM VT. ROUTE 125 EDGE OF SHOULDER UNLESS DENOTED OTHERWISE ON THE PLANS OR AS DIRECTED BY THE RESIDENT ENGINEER.

**SIGN LEGEND**  
 R = REMOVE  
 S = SALVAGE  
 N = NEW  
 RET = RETAIN  
 B-B = BACK TO BACK  
 EXISTING = - - - - -  
 NEW = \_\_\_\_\_

AREA TO BE RECLAIMED

**NOT TO SCALE**

<b>PROJECT LAYOUT SHEET #17</b>	PROJECT NAME: RIPTON - HANCOCK	PLOT DATE: 18-SEP-2013 17:10 DRAWN BY: C.A.K. CHECKED BY: D.W.E. SHEET 76 OF 114
	PROJECT NUMBER: STP 2803(1)	
	FILE NAME: p08cl60.dgn PROJECT LEADER: D.E.G. DESIGNED BY: M.J.M. IPARM FILE: p08cl60i17.i	