


NOTES

1. THESE PLANS SHOW A CONCEPTUAL EROSION CONTROL PLAN. THE CONTRACTOR MUST SUBMIT A TEMPORARY EROSION CONTROL PLAN FOR APPROVAL.
2. TEMPORARY EROSION CONTROL MEASURES ARE CONCEPTUALLY SHOWN. THE CONTRACTOR MAY RELOCATE TEMPORARY MEASURES TO IMPROVE EROSION CONTROL WITH APPROVAL OF THE RESIDENT ENGINEER AND ON SITE COORDINATOR. SILT FENCE SHALL NOT BE INSTALLED ACROSS CONTOURS.
3. THE CONTRACTOR SHALL USE OTHER TEMPORARY EROSION CONTROL MEASURES AS NECESSITATED BY THE SEQUENCE OF CONSTRUCTION OR AS DIRECTED BY THE RESIDENT ENGINEER OR ON SITE COORDINATOR.
4. REFER TO EPSC DETAIL SHEETS FOR ADDITIONAL DETAILS.
5. IN AREAS UNDER STONE FILL, GEOTEXTILE MAY BE SUITABLE FOR TEMPORARY SLOPE STABILIZATION.
6. DISTURBED AREAS REQUIRING REVEGETATION SHALL RECEIVE A MINIMUM TOPSOIL DEPTH OF 2 INCHES OR AS DIRECTED BY THE ENGINEER.

LEGEND

- AER E&T — AERIAL ELECTRIC & TELEPHONE
- SILT FENCE, WOVEN WIRE REINFORCED
- LIMITS OF SOIL DISTURBANCE
- ▨ TEMPORARY EROSION MATTING (SEE NOTE 5)
- PDF— PROJECT DEMARCATION FENCE
- RIPARIAN BUFFER ZONE
- ▲— ASSUMED CONSTRUCTION ACCESS ROUTE
- ▭ STABILIZED CONSTRUCTION ENTRANCE

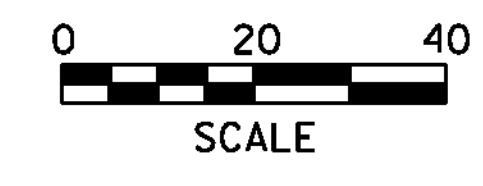

EPSC CONSTRUCTION SITE PLAN

PROJECT NAME:	IRASBURG	PLOT DATE:	11/16/2010
PROJECT NUMBER:	STP CULV(20)	DRAWN BY:	J. SOTER
FILE NAME:	...drawing\208cl94ero.dgn	CHECKED BY:	T. KNIGHT
PROJECT LEADER:	G. BOGUE	DESIGNED BY:	M. CHENETTE
EPSC CONSTRUCTION SITE PLAN		SHEET 10 OF 15	