DIRECTION	MILEPOINT	LOCATION CODE (SHEET 2)	SIGN CODE	WIDTH (IN)	HEIGHT (IN)	SHEETING REMARKS	SIGN LEGEND	NEW SIGNS "A"	NEW SIGNS "B"	EXISTING SIGNS RETAIN	EXISTING SIGNS SALVAGE FROM	EXISTING SIGNS SALVAGE TO	EXISTING SIGNS REMOVE	EXIST POST RETAIN	EXIST POST REMOVE	NUMBER OF NEW POSTS	SQUARE STEEL (IN) 1.75 (LB / FT) 1.88	SQUARE STEEL (IN) 2.00 (LB / FT) 2.42	SQUARE STEEL (IN) 2.50 (LB / FT) 3.35	TUBULAR STEEL Ø (IN) FOUNDATION	TUBULAR STEEL Ø (IN) 3.00 (LB / FT) 7.60	TUBULAR STEEL Ø (IN) 3.50 (LB / FT) 9.00	TUBULAR STEEL Ø (IN) 4.00 (LB / FT) 10.80	TUBULAR STEEL Ø (IN) 5.00 (LB / FT) 14.60	SIGN FRAME REQUIRED	REMARKS	SIGN DETAIL: DETAIL IN SHS	SIGN DETAIL: DETAIL ON SHEET NUMBER	SIGN DETAIL: DETAIL ON STD SHEET NUMBER
BRIDGEWATER VT 100							FY-FLUORESCENT YELLOW FYG-FLUORESCENT YELLOW GREEN																			"SHS"-STANDARD HIGHWAY SIGNS			
NB	0.000	C	VD-024	60	7.5								1		X														
		C	VD-024	72	10		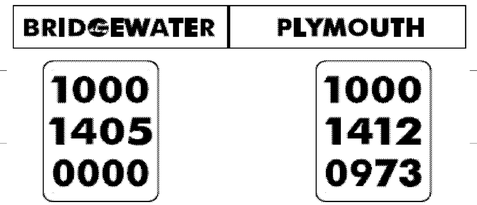	6.00								2		X								INSTALL IN THE SAME POSITION AS THE REMOVAL		4	
		C	VD-700	6	10			0.42																			BRIDGEWATER MILE MARKER; INSTALL ON THE LEFT POST UNDER BRIDGEWATER			E-138
		C	VD-700	6	10			0.42																			PLYMOUTH MILE MARKER; INSTALL ON THE RIGHT POST UNDER PLYMOUTH			E-138
NB	0.536	A	VD-062C	74.75	16		TRAVEL INFORMATION SYMBOLS			1				X															
		A	VD-062BC	74.75	16		TRAVEL INFORMATION			1																			
NB	0.770	A	VD-062B	72	16		BUSINESS SIGN			1				X															
		A	VD-062AS	72	16		BUSINESS SIGN			1																			
		A	VD-062AL	72	16		BUSINESS SIGN			1																			
NB	0.798	A	W3-1	36	36		STOP AHEAD SYMBOL				1	1			X	2		X									RESET TO SPEC, NEW POSTS.			
NB	0.838	A	M2-1	21	15								1		X														
		A	M1-4	24	24								1																
		A	M2-1	21	15			2.19								1		X							BLACK ON WHITE SHEETING	X		
		A	M1-4	24	24			4.00																					E-136A
SIGN SUMMARY SHEET							SHEET TOTALS	13.03	0.00	5	1	1	3	0	0	5		75									
								SF	SF	EA	EA	EA	EA	EA	EA	EA		FT									
VERMONT AGENCY OF TRANSPORTATION							TOWN TOTALS	111.1	0.0	12.0	1.0	1.0	25	0.0	0.0	15		225.0									

PROJECT NAME: **Ludlow-Waitsfield VT100**
PROJECT NUMBER: **STPG SIGN(27)**

FILE NAME: **Bridgewater.xls** PLOT DATE: **9/15/2009**
PROJECT MANAGER: **N. Avery** DRAWN BY: **I. Shea**
DESIGNED BY: **M. Miller** CHECKED BY: **N. Avery**
BRIDGEWATER SHEET 1 SHEET **49** OF **204**