DIRECTION	MILEPOINT	LOCATION CODE (SHEET 2)	SIGN CODE	WIDTH (IN)	HEIGHT (IN)	SHEETING REMARKS	SIGN LEGEND	NEW SIGNS "A"	NEW SIGNS "B"	EXISTING SIGNS RETAIN	EXISTING SIGNS SALVAGE FROM	EXISTING SIGNS SALVAGE TO	EXISTING SIGNS REMOVE	EXIST POST RETAIN	EXIST POST REMOVE	NUMBER OF NEW POSTS	SQUARE STEEL (IN) (LB / FT) 1.75 / 2.00 / 2.50	TUBULAR STEEL Ø (IN) FOUNDATION	TUBULAR STEEL Ø (IN) (LB / FT) 3.00 / 3.50 / 4.00 / 5.00	SIGN FRAME REQUIRED	REMARKS	SIGN DETAIL: DETAIL IN SHS	SIGN DETAIL: DETAIL ON SHEET NUMBER	SIGN DETAIL: DETAIL ON STD SHEET NUMBER
HANCOCK VT-100							FY-FLUORESCENT YELLOW FYG-FLUORESCENT YELLOW GREEN										1.88 / 2.42 / 3.35		7.60 / 9.00 / 10.80 / 14.60		"SHS"-STANDARD HIGHWAY SIGNS			
		F	D1-1A	72	12		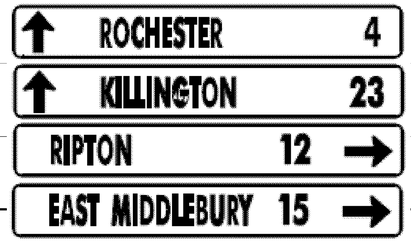	6.00															5	
		F	D1-1A	72	12			6.00															5	
		F	D1-1A	72	12			6.00															5	
SB	1.215	F	M3-3	24	12								1											
		F	M1-5	30	24								1											
		F	M6-3	24	15								1											
		F	M3-4	24	12								1		X									
		F	VM-064	24	12								1											
		F	M1-5	30	24								1											
		F	M6-1	21	15								1								RESET TO SPEC, NEW POSTS.			
		F	M3-3	24	12		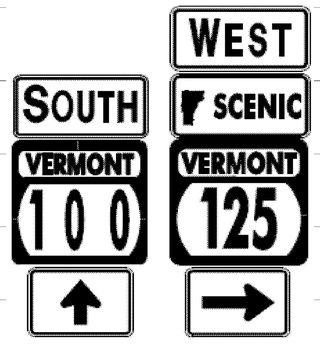	2.00								2	X		#2B	GREEN ON WHITE SHEETING	X		
		F	M1-5	30	24			5.00																E-136B
		F	M6-3	21	15			2.19													GREEN ON WHITE SHEETING	X		
		F	M3-4	24	12			2.00													GREEN ON WHITE SHEETING	X		
		F	VM-064	24	12			2.00															6	
							SHEET TOTALS	31.19 SF	0.00 SF	0 EA	0 EA	0 EA	7 EA	0 EA	0 EA	2 EA	30 FT							
							TOWN TOTALS	370.6	0.0	32.0	6.0	6.0	78	0.0	0.0	50	750.0							

SIGN SUMMARY SHEET

VERMONT AGENCY OF TRANSPORTATION

PROJECT NAME: **Ludlow-Waitsfield VT100**
PROJECT NUMBER: **STPG SIGN(27)**

FILE NAME: **Hancock.xls**
PROJECT MANAGER: **N. Avery**
DESIGNED BY: **J. Kelly**
HANCOCK SHEET 11

PLOT DATE: **9/10/2009**
DRAWN BY: **I. Shea**
CHECKED BY: **J. Kelly**
SHEET **132** OF **204**