DIRECTION	MILEPOINT	LOCATION CODE (SHEET 2)	SIGN CODE	WIDTH (IN)	HEIGHT (IN)	SHEETING REMARKS	SIGN LEGEND	NEW SIGNS "A"	NEW SIGNS "B"	EXISTING SIGNS RETAIN	EXISTING SIGNS SALVAGE FROM	EXISTING SIGNS SALVAGE TO	EXISTING SIGNS REMOVE	EXIST POST RETAIN	EXIST POST REMOVE	NUMBER OF NEW POSTS	SQUARE STEEL (IN) 1.75 (LB / FT) 1.88	SQUARE STEEL (IN) 2.00 (LB / FT) 2.42	SQUARE STEEL (IN) 2.50 (LB / FT) 3.35	TUBULAR STEEL Ø (IN) FOUNDATION	TUBULAR STEEL Ø (IN) 3.00 (LB / FT) 7.60	TUBULAR STEEL Ø (IN) 3.50 (LB / FT) 9.00	TUBULAR STEEL Ø (IN) 4.00 (LB / FT) 10.80	TUBULAR STEEL Ø (IN) 5.00 (LB / FT) 14.60	SIGN FRAME REQUIRED	REMARKS	SIGN DETAIL: DETAIL IN SHS	SIGN DETAIL: DETAIL ON SHEET NUMBER	SIGN DETAIL: DETAIL ON STD SHEET NUMBER
HANCOCK VT-100							FY-FLUORESCENT YELLOW FYG-FLUORESCENT YELLOW GREEN																			"SHS"-STANDARD HIGHWAY SIGNS			
		F	M1-5	30	24			5.00																				E-136B
		F	M6-1R	21	15			2.19																		GREEN ON WHITE SHEETING	X		
SB	1.163	G	VR-017	24	30		LEGAL LOAD LIMIT 24,000 LBS			1				X												TH-20, KILLOLEET DR.			
SB	1.159	H	R1-1	30	30		STOP			1				X												TH-20, KILLOLEET DR.			
SB	1.148	F	S1-1	36	36	FYG	SCHOOL PENTAGON			1				X												RETAIN SIGNS AND POSTS, IF PRESENT			
		F	W16-9	24	10	FYG	AHEAD			1																			
SB	1.113	F	R2-1	24	30								1		X															
		F	R2-1	24	30			5.00								1		X									X		
SB	1.060	F	D2-1	72	12		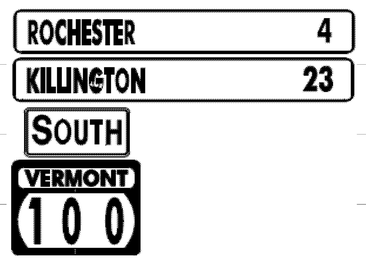	6.00								2		X								INSTALL ON NORTH SIDE OF UTILITY POLE 130 FEET NORTH OF CROSSWALK		5	
		F	D2-1	72	12			6.00																				5	
		F	M3-3	24	12			2.00																		INSTALL GREEN ON WHITE SHEETING ROUTE MARKERS ON LEFT POST	X		
		F	M1-5	30	24			5.00																					E-136B
SB	1.027	F	S1-1	36	36	FYG	SCHOOL PENTAGON			1				X												RETAIN SIGNS AND POSTS, IF PRESENT.			
		F	W16-7	30	18	FYG	DIAGONAL ARROW			1																			
SB	0.892	F	W11-2	30	30	FYG	PEDESTRIAN						1		X															
							SHEET TOTALS	31.19	0.00	6	0	0	2	0	0	3		45										
								SF	SF	EA	EA	EA	EA	EA	EA	EA		FT										
							TOWN TOTALS	370.6	0.0	32.0	6.0	6.0	78	0.0	0.0	50		750.0										

SIGN SUMMARY SHEET

VERMONT AGENCY OF TRANSPORTATION

PROJECT NAME: **Ludlow-Waitsfield VT100**
PROJECT NUMBER: **STPG SIGN(27)**

FILE NAME: **Hancock.xls**
PROJECT MANAGER: **N. Avery**
DESIGNED BY: **J. Kelly**
HANCOCK SHEET 12

PLOT DATE: **9/10/2009**
DRAWN BY: **I. Shea**
CHECKED BY: **J. Kelly**
SHEET **133** OF **204**