

TEMPORARY 4" WHITE LINE, PAINT
 DURABLE 4" WHITE LINE (OPTION BID ITEM)
 367+50 TO 379+50 SOLID LT
 367+50 TO 379+50 SOLID RT

TEMPORARY 4" YELLOW LINE, PAINT
 DURABLE 4" YELLOW LINE (OPTION BID ITEM)
 367+50 TO 379+50 SOLID LT & RT

STONE FILL, TYPE I
 GEOTEXTILE UNDER STONE FILL
 377+75 TO 379+50 LT

6 INCH UNDERDRAIN PIPE
 367+50 TO 367+60 LT
 367+75 TO 371+00 LT


STEEL BEAM GUARDRAIL, GALVANIZED
 W/8 FEET POSTS
 367+50 TO 368+30.5 RT
 368+75 TO 371+12.5 RT

ANCHOR FOR STEEL BEAM RAIL
 368+30.5 RT
 368+75 RT
 371+12.5 RT


REMOVAL AND DISPOSAL OF GUARDRAIL
 367+50 TO 368+32 RT
 368+81 TO 371+11 RT

DELINEATOR WITH STEEL POST
 368+30.5 RT
 368+75 RT
 371+12.5 RT

RELOCATE MAILBOX, SINGLE SUPPORT
 373+58 LT

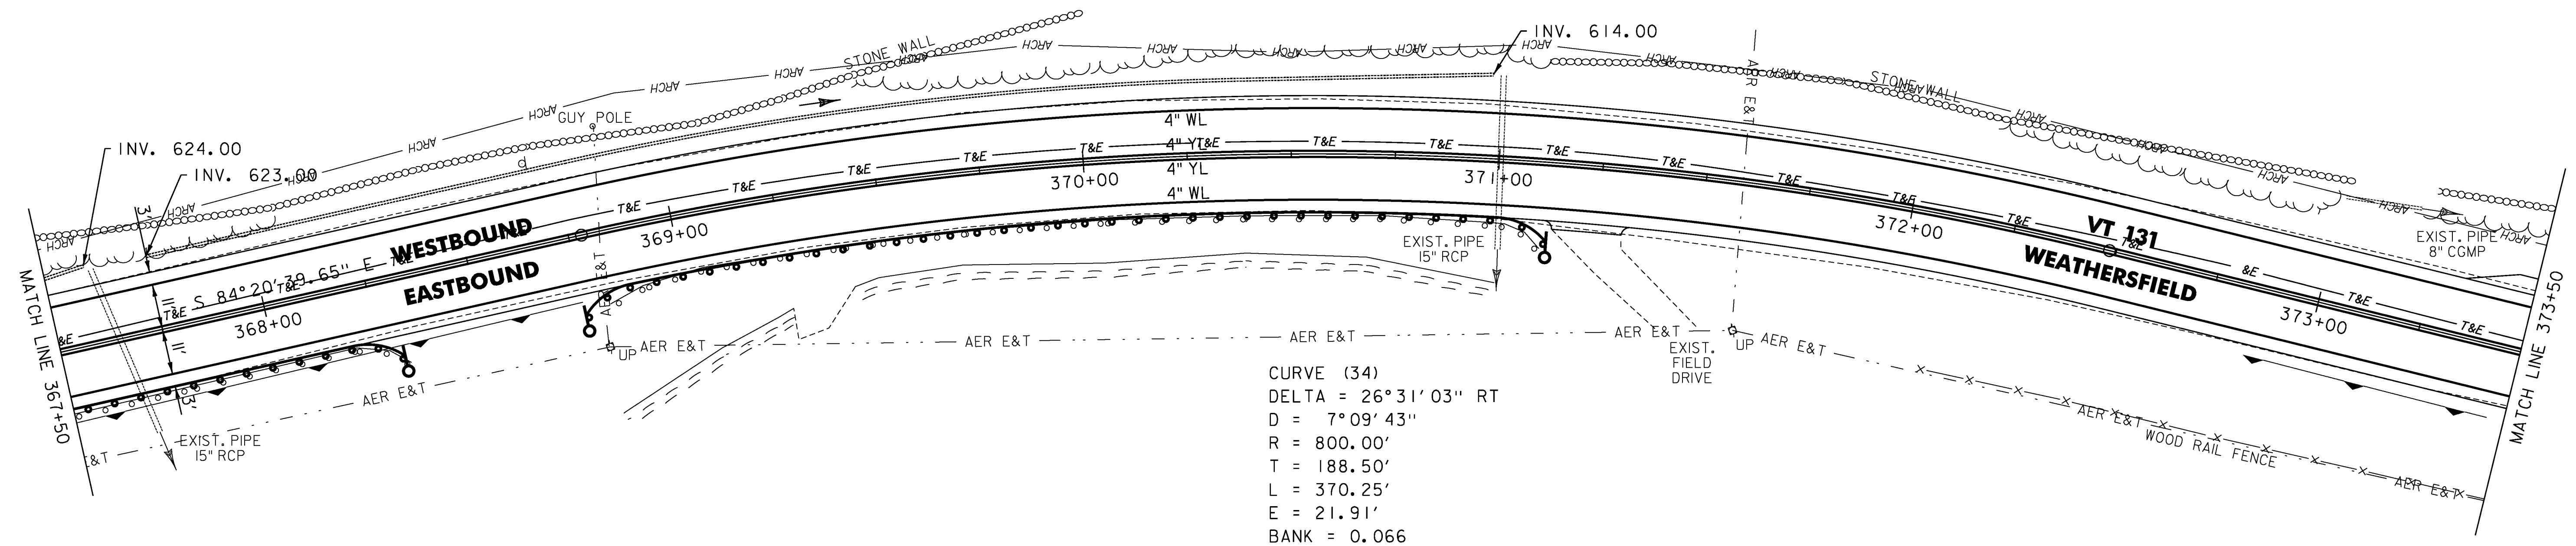

CURVE (34)
 DELTA = 26°31'03" RT
 D = 7°09'43"
 R = 800.00'
 T = 188.50'
 L = 370.25'
 E = 21.91'
 BANK = 0.066

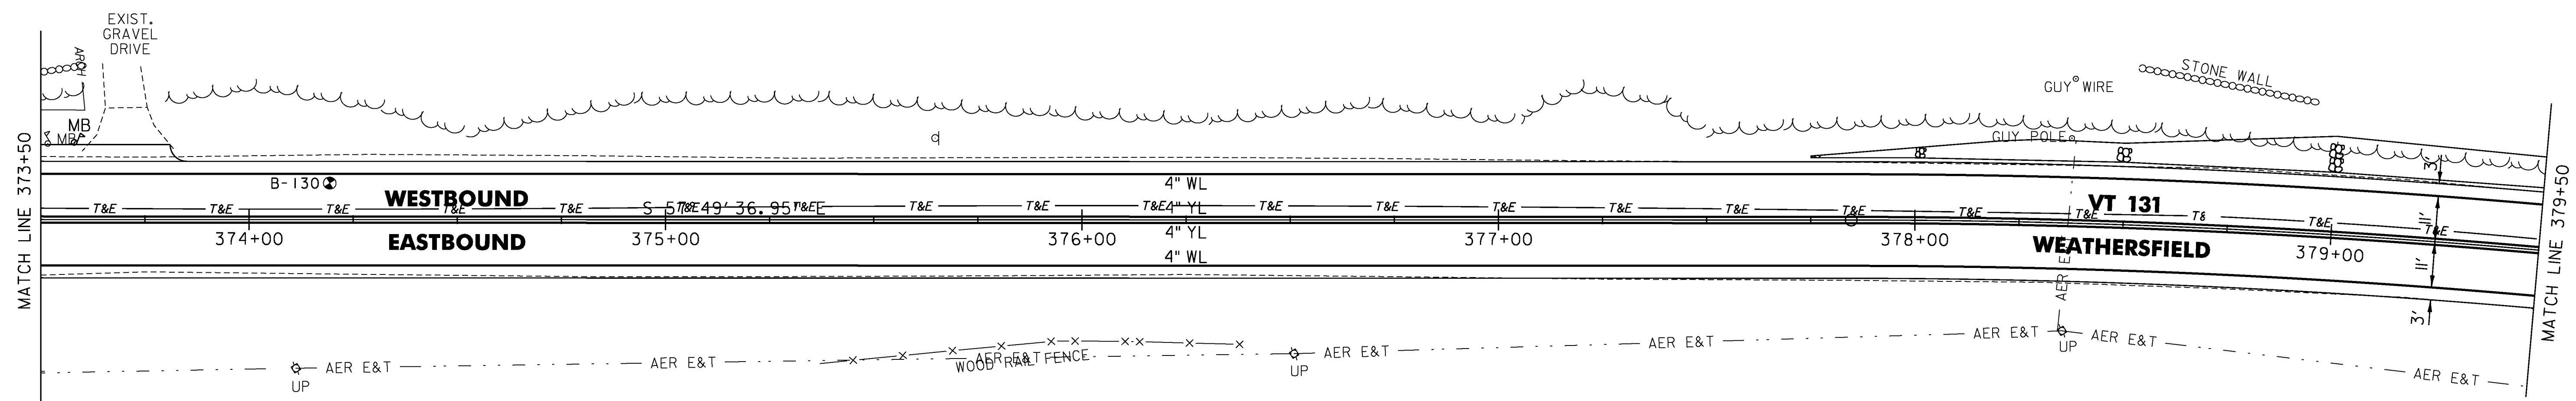

LEGEND

- R = REMOVE EXISTING
- S = SALVAGE
- R&S = REMOVE AND SALVAGE
- N = NEW
- RET = RETAIN
- B-B = BACK TO BACK
- = EXISTING GUARDRAIL
- = PROPOSED GUARDRAIL
- YL = YELLOW LINE
- WL = WHITE LINE
- = DELINEATOR
- = UNDERDRAIN
- = BORING

ROADWAY LAYOUT SHEET 28

PROJECT NAME: WEATHERSFIELD

PROJECT NUMBER: STP 2913(I)

FILE NAME: I0c228.dgn

PROJECT LEADER: PTS

DESIGNED BY: NLL

IPARM FILE NAME: pI0c228_6i

PLOT DATE: 3/7/2013

DRAWN BY: WWG

CHECKED BY: PTS

SHEET 61 OF 234

NOT TO SCALE