LOCATION OF DRIVES

STATION	POSITION	QUANTITY
		(SY)
VT ROUTE 131		
439+79	LT	21
441+12	LT	26
441+55	RT	24
442+89	RT	28
446+76	RT	29
451+21	RT	14
454+35	RT	16
SUBTOTAL VT 131		**158 SY**
VT ROUTE 12		
2+27	LT	23
7+78	LT	15
14+39	RT	10
16+19	RT	14
16+89	LT	16
17+67	LT	18
18+46	LT	18
18+61	RT	13
SUBTOTAL VT 12		**127 SY**
OLD VT 12		
9+05	RT	6
9+40	RT	6
10+47	RT	6
11+76	RT	8
12+42	RT	6
SUBTOTAL OLD VT 12		**32 SY**
US ROUTE 5		
273+67	RT	19
275+39	RT	40
276+30	LT	30
276+44	RT	9
	SUBTOTAL US 5	**98 SY**
SUBTOTAL VT 131		**158**
SUBTOTAL VT 12		**127**
SUBTOTAL OLD VT 12		**32**
	SUBTOTAL US 5	**98**
PROJECT SUBTOTAL		**415**
	ROUNDING	**5**
	PROJECT TOTAL	**420**

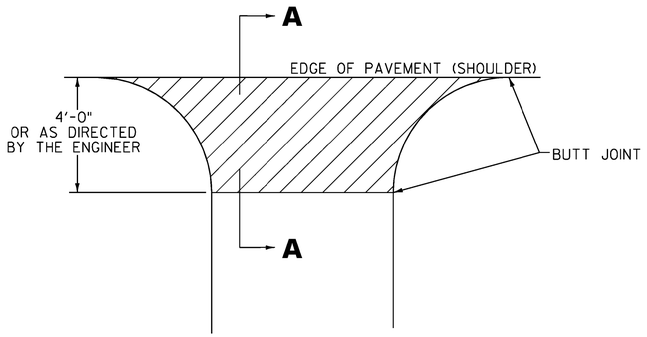

PLAN

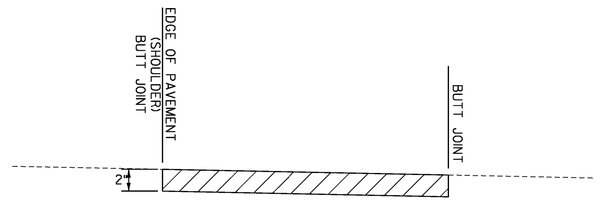

SECTION A – A

HANDWORK DETAILS FOR PAVED DRIVES

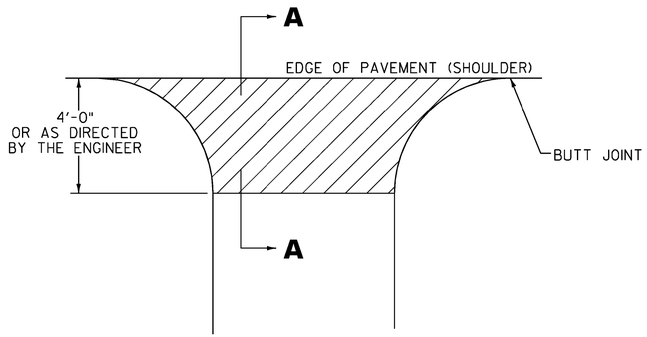

PLAN

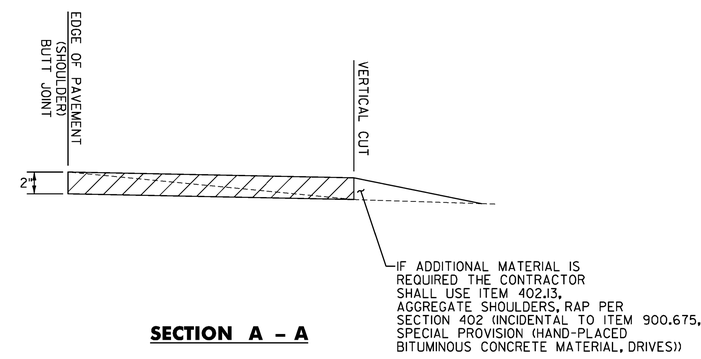

SECTION A – A

HANDWORK DETAILS FOR GRAVEL DRIVES

NOTES

1. PAVING LIFT NOT TO EXCEED 2" (50mm).

2. THE COST OF PLACING SUBBASE MATERIAL, CLEANING EXISTING PAVED SURFACES, INCLUDING POWER EQUIPMENT, AND FOR FILLING JOINTS, CRACKS AND HOLES AT LEAST 24 HOURS BEFORE PAVING, WILL NOT BE PAID DIRECTLY BUT WILL BE CONSIDERED INCIDENTAL TO ITEM 900.675, SPECIAL PROVISION (HAND-PLACED BITUMINOUS CONCRETE MATERIAL, DRIVES).

3. EXCAVATION NEEDED TO ACHIEVE PROPER DRIVE SLOPES WILL NOT BE PAID DIRECTLY BUT WILL BE CONSIDERED INCIDENTAL TO ITEM 900.675, SPECIAL PROVISION (HAND-PLACED BITUMINOUS CONCRETE MATERIAL, DRIVES).

LEGEND

ITEM 900.675 - SPECIAL PROVISION
(HAND-PLACED BITUMINOUS CONCRETE MATERIAL, DRIVES)

NOT TO SCALE

HANDWORK DETAIL SHEET

PROJECT NAME: WEATHERSFIELD

PROJECT NUMBER: NH 2948(1)

FILE NAME: pl2bl26.dgn
PROJECT LEADER: PTS
DESIGNED BY: NLL
IPARM FILE NAME: pl2Bl26_215

PLOT DATE: 2/7/2013
DRAWN BY: SNG
CHECKED BY: PTS
SHEET 215 OF 234