DIRECTION	MILEPOINT	LOCATION CODE (SHEET 2)	SIGN CODE	WIDTH (IN)	HEIGHT (IN)	SHEETING REMARKS	SIGN LEGEND	NEW SIGNS		EXISTING SIGNS				EXIST POST		NUMBER OF NEW POSTS	SQUARE STEEL (IN)			TUBULAR STEEL Ø (IN)					SIGN FRAME REQUIRED	REMARKS	SIGN DETAIL		
								"A"	"B"	RETAIN	SALVAGE FROM	SALVAGE TO	REMOVE	RETAIN	REMOVE		1.75 (LB / FT) 1.88	2.00 (LB / FT) 2.42	2.50 (LB / FT) 3.35	FOUNDATION	3.00 (LB / FT) 7.60	3.50 (LB / FT) 9.00	4.00 (LB / FT) 10.80	5.00 (LB / FT) 14.60			DETAIL IN SHS	DETAIL ON SHEET NUMBER	DETAIL ON STD SHEET NUMBER
ADDISON WESTBOUND							FY-FLUORESCENT YELLOW FYG-FLUORESCENT YELLOW GREEN																			"SHS"-STANDARD HIGHWAY SIGNS			
WB	8.524	F	M2-1S	21	15		JCT			1				X														
		F	M1-5	30	24		VERMONT 22A			1																		
WB	8.489	F	D1-1M	72	10		BRIDGE TO NY STATE 9				1	1			X											INSTALL SALVAGED SIGNS ON 2 NEW POSTS, AT TOP OF ASSEMBLY			
		F	D1-1M	72	10		TOLL FREE 24 HOUR OPERATION				1	1																
		F	D1-1A	54	7.5								1															
		F	D1-1A	54	7.5								1															
		F	D1-1A	54	7.5								1															
		F	D1-1A	72	12		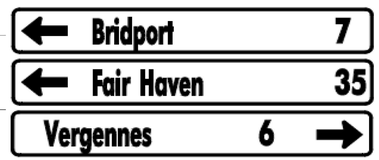	6.00								2		X								5	
		F	D1-1A	72	12			6.00																				5
		F	D1-1A	72	12			6.00																				5
WB	8.449	F	M3-3S	24	12		SOUTH			1				X														
		F	M1-5	30	24		VERMONT 22A			1																		
		F	M6-1S	21	15		<--- LEFT			1																		
		F	M3-4S	24	12		WEST			1																		
		F	M1-5	24	24		VERMONT 17			1																		
							SHEET TOTALS	18.00	0.00	7	2	2	3	0	0	2		30										
								SF	SF	EA	EA	EA	EA	EA	EA	EA		FT										
							TOWN DIRECTIONAL TOTALS	296.9	0.0	34.0	6.0	6.0	50	0.0	0.0	51		765.0										

SIGN SUMMARY SHEET

VERMONT AGENCY OF TRANSPORTATION

PROJECT NAME: **Statewide - Northwest Region**
PROJECT NUMBER: **STPG SIGN(30)**

FILE NAME: **Addison WB.xls** PLOT DATE: **8/11/2010**
PROJECT MANAGER: **A. Gamble** DRAWN BY: **T. Guazzoni**
DESIGNED BY: **T. Guazzoni** CHECKED BY: **A. Gamble**
ADDISON VT 17 WESTBOUND SHEET 3 SHEET **52** OF **131**