

NOTES:

DURABLE 4 INCH WHITE LINE, TYPE I TAPE
STA. 40+25 - STA. 44+75 (SOLID LT & RT)


DURABLE 4 INCH YELLOW LINE, TYPE I TAPE
STA. 40+25 - STA. 44+75 (CENTERLINE LT)
STA. 42+62 - STA. 44+75 (CENTERLINE LT)

DURABLE 8 INCH YELLOW LINE, TYPE I TAPE
STA. 42+62 - STA. 44+75 (HATCHED LT)

1. THE FOLLOWING ALTERNATIVE LAYOUT PLANS SHALL BE USED IF THE SHELBURNE GREEN, US ROUTE 7 ACCESS IMPROVEMENT PROJECT HAS COMPLETED WIDENING OF THIS SECTION PRIOR TO PAVING THIS PORTION OF THE PROJECT. FOR BIDDING PURPOSES IT HAS BEEN ASSUMED THAT THE SHELBURNE GREEN PROJECT WILL NOT HAVE BEEN COMPLETED AND THEREFORE THE PLAN ON SHEET 26 SHOULD BE THE ASSUMED DESIGN.

ADDITIONAL QUANTITIES REQUIRED IF ALTERNATIVE PAVEMENT LAYOUT USED

DESCRIPTION	QUANTITY	UNITS
490.30 SUPERPAVE BITUMINOUS CONCRETE PAVEMENT		
LEVELING COURSE	21.6	TON
WEARING COURSE	86.4	TON
TOTAL	108	TON
646.411 "DURABLE 4 INCH YELLOW LINE, TYPE I TAPE"	625	LF
646.451 "DURABLE 8 INCH YELLOW LINE, TYPE I TAPE"	390	LF
646.481 "DURABLE 24 INCH STOP BAR, TYPE I TAPE"	19	LF
646.491 "DURABLE LETTER OR SYMBOL, TYPE I TAPE"	10	EA

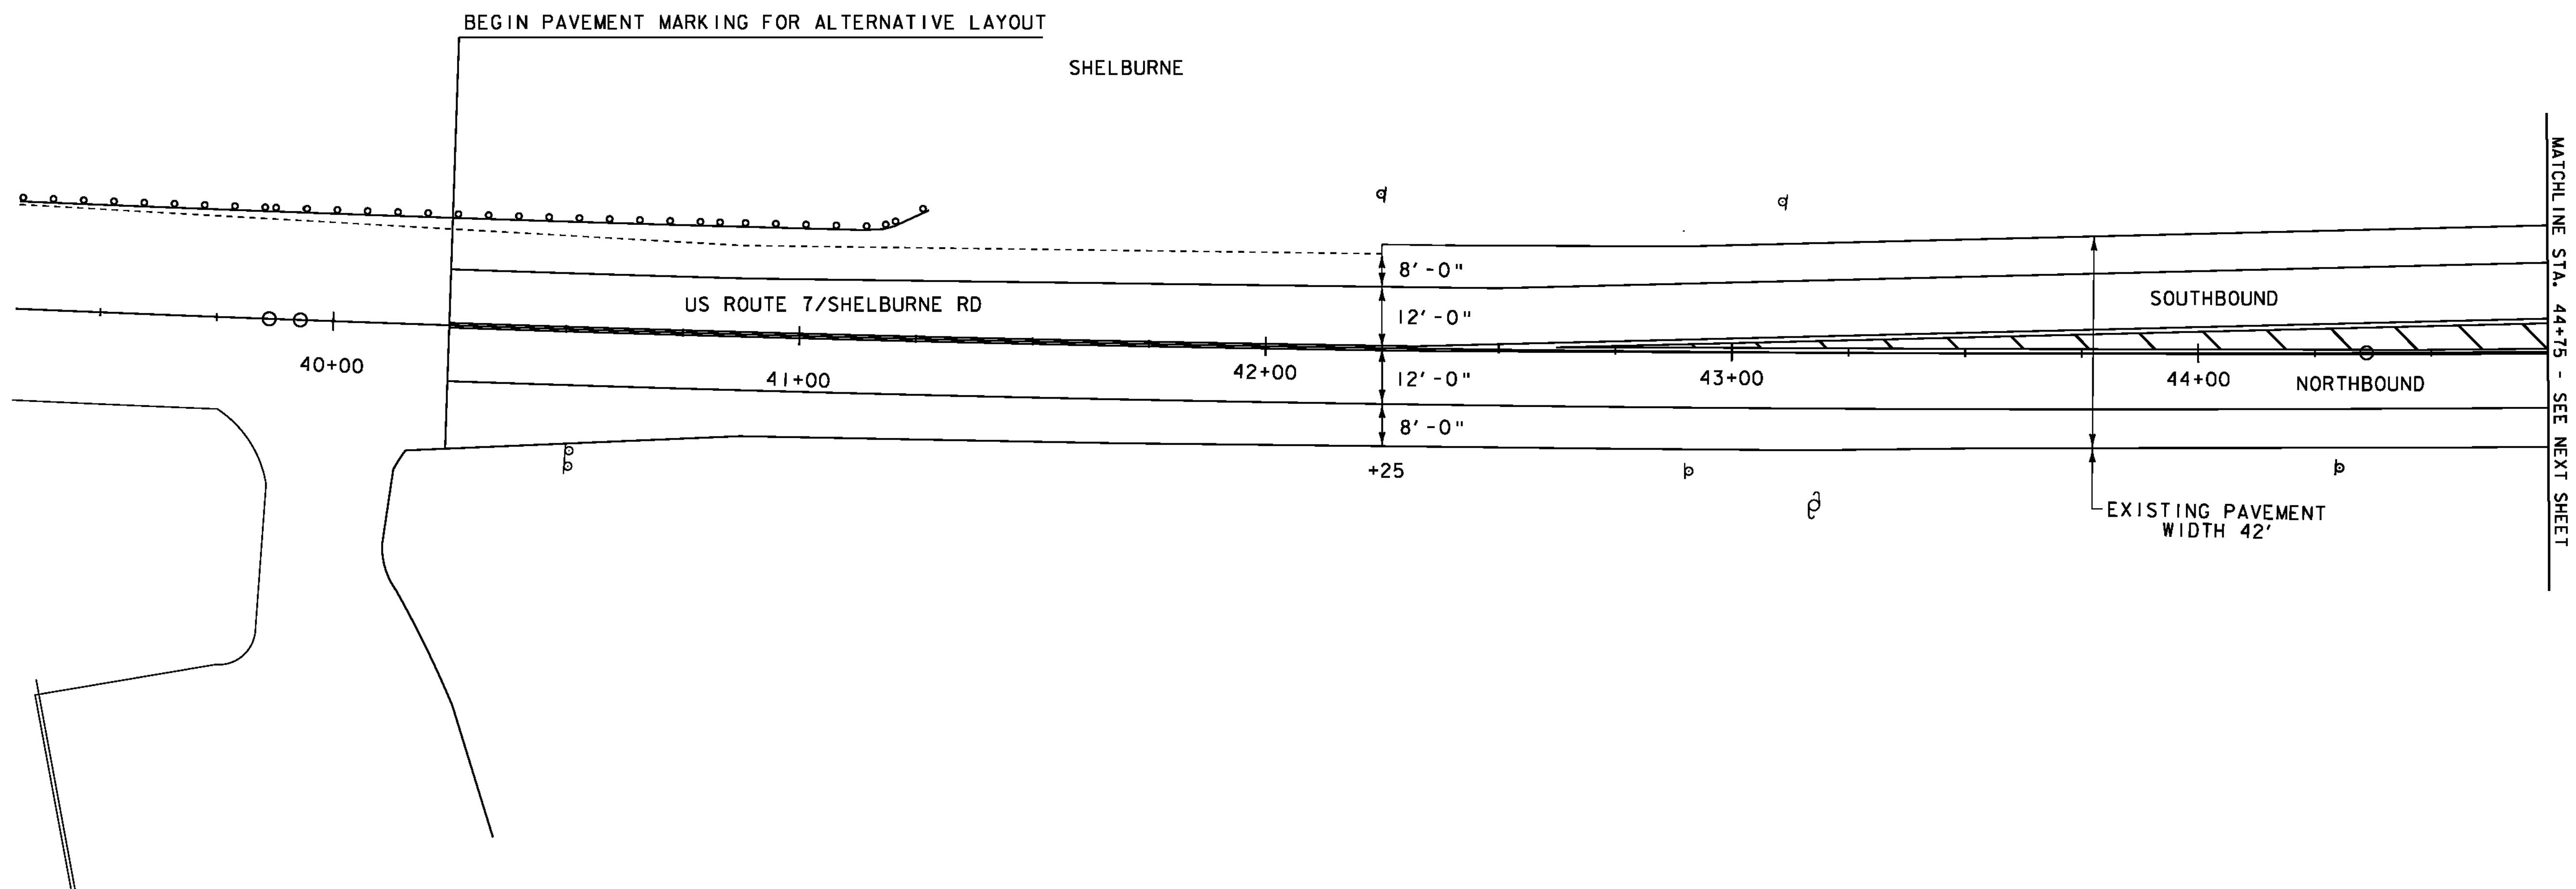

ALTERNATIVE LAYOUT PLAN SHEET 1	PROJECT NAME: CHARLOTTE-SOUTH BURLINGTON	PLOT DATE: 4/19/12
	PROJECT NUMBER: NH 2907(I)	DRAWN BY: BMB
	FILE NAME: p10B206.dgn	CHECKED BY: EPD
	PROJECT LEADER: CDL	SHEET 105 OF 107
	DESIGNED BY: BMB	
	PLOT FILE: p10B206_105.1	

NOT TO SCALE