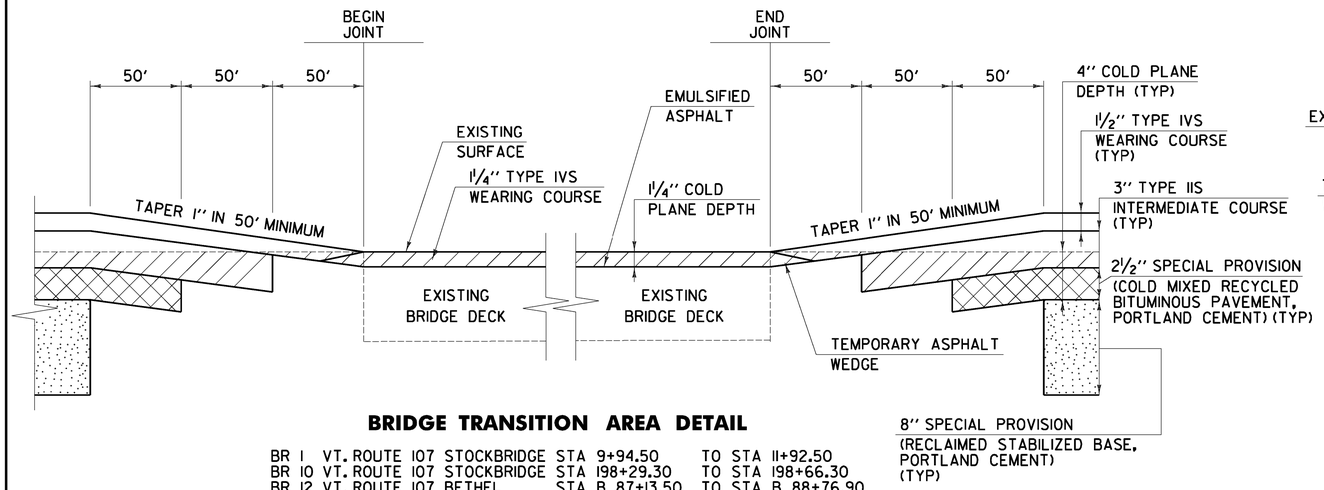

BRIDGE TRANSITION AREA DETAIL

BR 1	VT. ROUTE 107 STOCKBRIDGE	STA 9+94.50	TO STA 11+92.50
BR 10	VT. ROUTE 107 STOCKBRIDGE	STA 198+29.30	TO STA 198+66.30
BR 12	VT. ROUTE 107 BETHEL	STA B 87+13.50	TO STA B 88+76.90

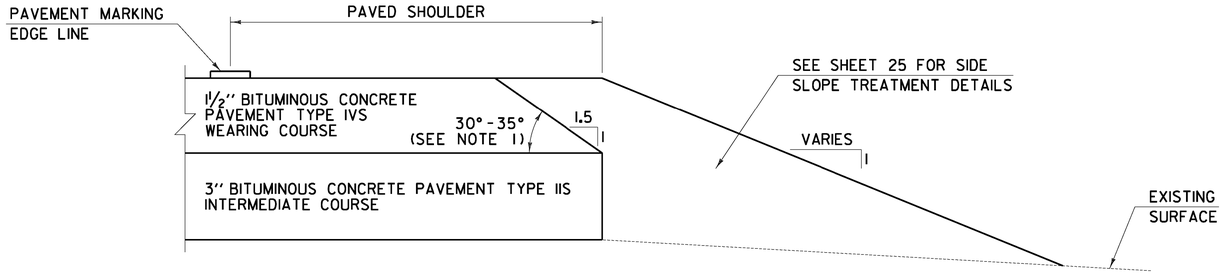

SAFETY EDGE DETAIL

VT. ROUTE 107	STOCKBRIDGE	STA 0+00.00	TO STA 166+20.00
VT. ROUTE 107	STOCKBRIDGE	STA 179+26.00	TO STA 353+84.48
VT. ROUTE 107	BETHEL	STA B 0+00.00	TO STA B 170+28.00

NOTE:

1. THE EDGE OF PAVEMENT SHALL BE FORMED IN SUCH A WAY THAT THE BITUMINOUS CONCRETE PAVEMENT IS EXTRUDED OR COMPRESSED TO FORM THE 30 TO 35 DEGREE ANGLE. DEVICES THAT SIMPLY STRIKE - OFF THE MIX WITHOUT PROVIDING ANY COMPACTIVE EFFORT WILL NOT BE ALLOWED.

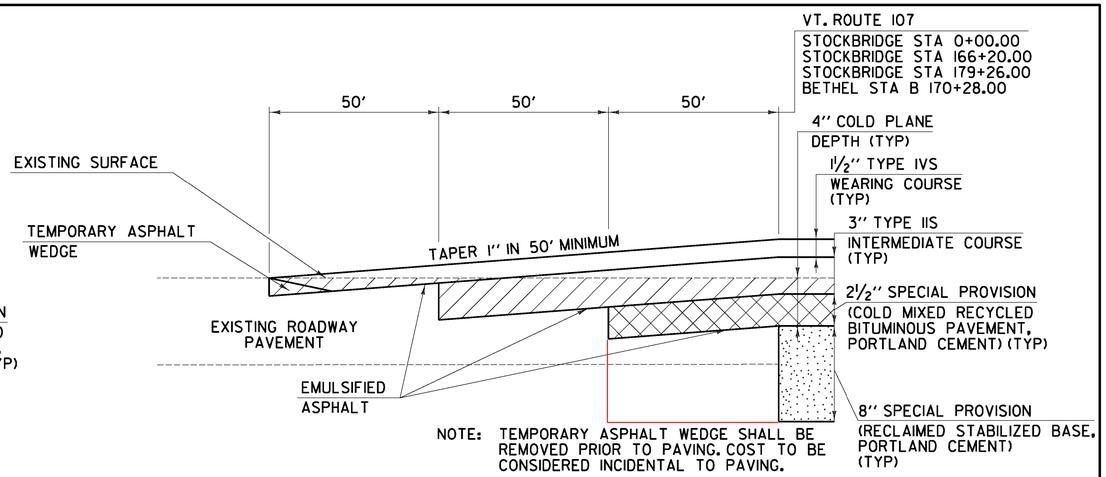

NOTE: TEMPORARY ASPHALT WEDGE SHALL BE REMOVED PRIOR TO PAVING. COST TO BE CONSIDERED INCIDENTAL TO PAVING.

RECLAIMED APPROACH AREA DETAIL

VT. ROUTE 107	STOCKBRIDGE	STA 0+00.00	- BEGIN PROJECT
VT. ROUTE 107	STOCKBRIDGE	STA 166+20.00	- STOP RECLAIM
VT. ROUTE 107	STOCKBRIDGE	STA 179+26.00	- RESUME RECLAIM
VT. ROUTE 107	BETHEL	STA B 170+28.00	- END PROJECT

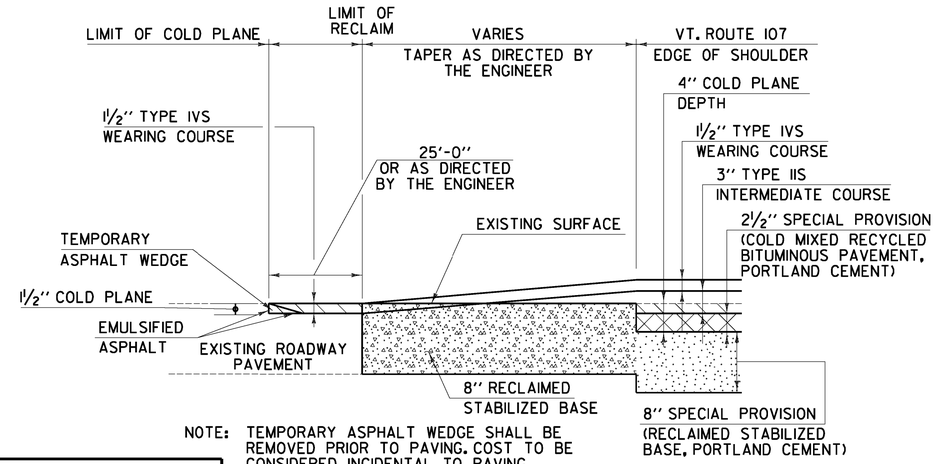

NOTE: TEMPORARY ASPHALT WEDGE SHALL BE REMOVED PRIOR TO PAVING. COST TO BE CONSIDERED INCIDENTAL TO PAVING.

RECLAIMED SIDE ROAD AREA DETAIL

STOCKBRIDGE:	TH-18	STA 134+74.56	RT
	TH-1	STA 142+56.00	LT
	TH-61	STA 155+49.60	LT
	TH-62	STA 157+08.00	LT
	TH-15	STA 218+38.08	RT
	TH-2	STA 232+68.96	LT
BETHEL:	SFH	STA B 70+69.92	LT
	VT-12	STA B 82+63.20	RT
	TH-77	STA B 89+39.04	LT
	TH-51	STA B 95+30.40	RT
	TH-4	STA B 156+71.04	RT
	TH-4	STA B 158+18.88	RT
	TH-49	STA B 162+20.16	RT
	TH-69	STA B 170+06.88	LT

PROJECT PAVING LIMITS

TOWN & ROUTE	BEGIN STATION	END STATION	LANE TYPICAL	WEARING DEPTH	LEVELING TON	NOTES
STOCKBRIDGE:						
VT. ROUTE 107	0+00.00	1+50.00	VARIES SEE PLAN	1½"	-	COLD PLANE 4", RECLAIM 8", PLACE 2½" COLD MIX, PAVE WITH 3" TYPE IIS & PAVE WITH 1½" TYPE IVS
VT. ROUTE 107	1+50.00	8+94.50	4'-11'-11'-4'	1½"	-	COLD PLANE 4", RECLAIM 8", PLACE 2½" COLD MIX, PAVE WITH 3" TYPE IIS & PAVE WITH 1½" TYPE IVS
VT. ROUTE 107	8+94.50	9+94.50	VARIES SEE PLAN	1½"	-	COLD PLANE 4", RECLAIM 8", PLACE 2½" COLD MIX, PAVE WITH 3" TYPE IIS & PAVE WITH 1½" TYPE IVS
VT. ROUTE 107	9+94.50	11+92.50	8'-11'-11'-8'	1¼"	-	BR 1 COLD PLANE 1¼" & PAVE WITH 1¼" TYPE IVS
VT. ROUTE 107	11+92.50	12+89.00	VARIES SEE PLAN	1½"	-	COLD PLANE 4", RECLAIM 8", PLACE 2½" COLD MIX, PAVE WITH 3" TYPE IIS & PAVE WITH 1½" TYPE IVS
VT. ROUTE 107	12+89.00	166+20.00	4'-11'-11'-4'	1½"	-	COLD PLANE 4", RECLAIM 8", PLACE 2½" COLD MIX, PAVE WITH 3" TYPE IIS & PAVE WITH 1½" TYPE IVS
VT. ROUTE 107	166+20.00	179+26.00	-	-	-	NO PAVING WORK
VT. ROUTE 107	179+26.00	180+00.00	VARIES SEE PLAN	1½"	-	COLD PLANE 4", RECLAIM 8", PLACE 2½" COLD MIX, PAVE WITH 3" TYPE IIS & PAVE WITH 1½" TYPE IVS
VT. ROUTE 107	180+00.00	197+29.30	4'-11'-11'-4'	1½"	-	COLD PLANE 4", RECLAIM 8", PLACE 2½" COLD MIX, PAVE WITH 3" TYPE IIS & PAVE WITH 1½" TYPE IVS
VT. ROUTE 107	197+29.30	198+29.30	VARIES SEE PLAN	1½"	-	COLD PLANE 4", RECLAIM 8", PLACE 2½" COLD MIX, PAVE WITH 3" TYPE IIS & PAVE WITH 1½" TYPE IVS
VT. ROUTE 107	198+29.30	198+66.30	7'-11'-11'-7'	1¼"	-	BR 10 COLD PLANE 1¼" & PAVE WITH 1¼" TYPE IVS
VT. ROUTE 107	198+66.30	199+66.30	VARIES SEE PLAN	1½"	-	COLD PLANE 4", RECLAIM 8", PLACE 2½" COLD MIX, PAVE WITH 3" TYPE IIS & PAVE WITH 1½" TYPE IVS
VT. ROUTE 107	199+66.30	353+84.48	4'-11'-11'-4'	1½"	-	COLD PLANE 4", RECLAIM 8", PLACE 2½" COLD MIX, PAVE WITH 3" TYPE IIS & PAVE WITH 1½" TYPE IVS
BETHEL:						
VT. ROUTE 107	B 0+00.00	B 86+09.00	4'-11'-11'-4'	1½"	-	COLD PLANE 4", RECLAIM 8", PLACE 2½" COLD MIX, PAVE WITH 3" TYPE IIS & PAVE WITH 1½" TYPE IVS
VT. ROUTE 107	B 86+09.00	B 87+13.50	VARIES SEE PLAN	1½"	-	COLD PLANE 4", RECLAIM 8", PLACE 2½" COLD MIX, PAVE WITH 3" TYPE IIS & PAVE WITH 1½" TYPE IVS
VT. ROUTE 107	B 87+13.50	B 88+76.90	4'-11'-11'-5'	1¼"	-	BR 12 COLD PLANE 1¼" & PAVE WITH 1¼" TYPE IVS
VT. ROUTE 107	B 88+76.90	B 89+81.00	VARIES SEE PLAN	1½"	-	COLD PLANE 4", RECLAIM 8", PLACE 2½" COLD MIX, PAVE WITH 3" TYPE IIS & PAVE WITH 1½" TYPE IVS
VT. ROUTE 107	B 89+81.00	B 158+25.00	4'-11'-11'-4'	1½"	-	COLD PLANE 4", RECLAIM 8", PLACE 2½" COLD MIX, PAVE WITH 3" TYPE IIS & PAVE WITH 1½" TYPE IVS
VT. ROUTE 107	B 158+25.00	B 159+00.00	VARIES SEE PLAN	1½"	-	COLD PLANE 4", RECLAIM 8", PLACE 2½" COLD MIX, PAVE WITH 3" TYPE IIS & PAVE WITH 1½" TYPE IVS
VT. ROUTE 107	B 159+00.00	B 170+28.00	3'-11'-11'-3'	1½"	-	COLD PLANE 4", RECLAIM 8", PLACE 2½" COLD MIX, PAVE WITH 3" TYPE IIS & PAVE WITH 1½" TYPE IVS

PAVING DETAILS SHEET

PROJECT NAME: STOCKBRIDGE-BETHEL

PROJECT NUMBER: STP 2910(1)

FILE NAME: z10b214_pd.dgn
PROJECT LEADER: D.E.G.
DESIGNED BY: L.M.B.
IPARM FILE: z10b214pd.i

PLOT DATE: 3/17/2014
DRAWN BY: W.G.P.
CHECKED BY: J.P.S.
SHEET 22 OF 397

FILE NAME = W:\Projects\VAHYK2\22426\CADD_MSTN\z10b214_pd.dgn
DATE/TIME = 3/17/2014
USER = 4916