LOCATION OF DRIVES

STATION	POSTION	QUANTITY (SY)
JAY		
36+50	RT	4
42+48	RT	4
51+08	RT	5
63+20	RT	4
84+67	RT	4
93+09	RT	5
97+95	LT	16
101+06	RT	3
108+64	RT	5
129+93	LT	5
137+60	LT	5
141+70	LT	5
248+03	RT	5
253+52	LT	5
254+96	RT	4
271+87	RT	5
274+43	LT	5
276+08	LT	4
276+20	RT	3
277+71	LT	4
289+33	LT	4
289+47	RT	4
290+37	LT	4
300+93	LT	5
303+28	RT	5
310+16	LT	3
310+20	RT	4
310+77	LT	4
312+74	RT	3
314+02	RT	4
318+68	RT	3
320+95	LT	3
323+95	LT	5
330+48	RT	3
330+80	LT	3
333+47	RT	5
338+78	RT	5
341+78	LT	3
343+49	LT	3
345+19	RT	10
355+26	LT	4
356+63	RT	4
360+61	RT	9
363+58	RT	8
367+05	LT	10
377+07	RT	21
377+35	LT	23
383+53	LT	5
391+51	LT	7

STATION	POSTION	QUANTITY (SY)
398+03	RT	10
405+17	LT	6
422+32	RT	6
424+95	RT	11
429+85	LT	14
430+75	LT	3
431+47	LT	14
433+20	LT	5
438+00	RT	10
	JAY SUBTOTAL	**353**
TROY		
T0+67	LT	25
T3+25	LT	9
T5+00	RT	9
T5+28	LT	21
T5+75	RT	8
T8+82	LT	11
	TROY SUBTOTAL	**83**
PULLOFFS		
195+75	RT	298
	PULLOFFS SUBTOTAL	**298**
MAILBOX TURNOUT		
343+45	RT	13
425+14	LT	13
438+00	LT	13
MAILBOX TURNOUT SUBTOTAL		**39**
	JAY SUBTOTAL	353
	TROY SUBTOTAL	83
	PULLOFF SUBTOTAL	298
	MAILBOX TURNOUT SUBTOTAL	39
	PROJECT SUBTOTAL	**773**
	ROUNDING	2
	PROJECT TOTAL	**775**

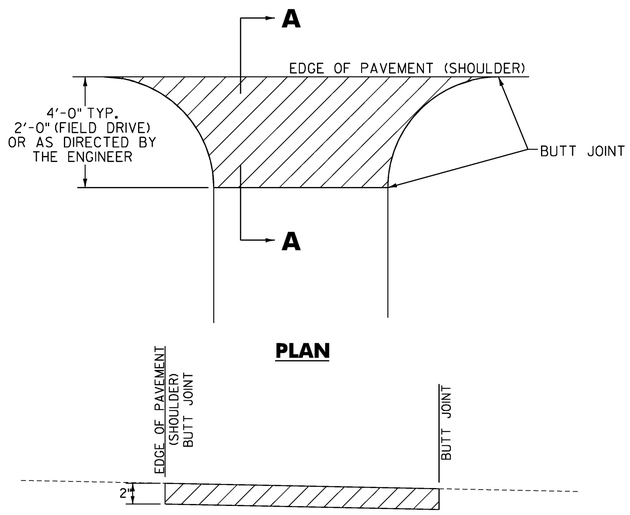

SECTION A – A

HANDWORK DETAILS FOR PAVED DRIVES

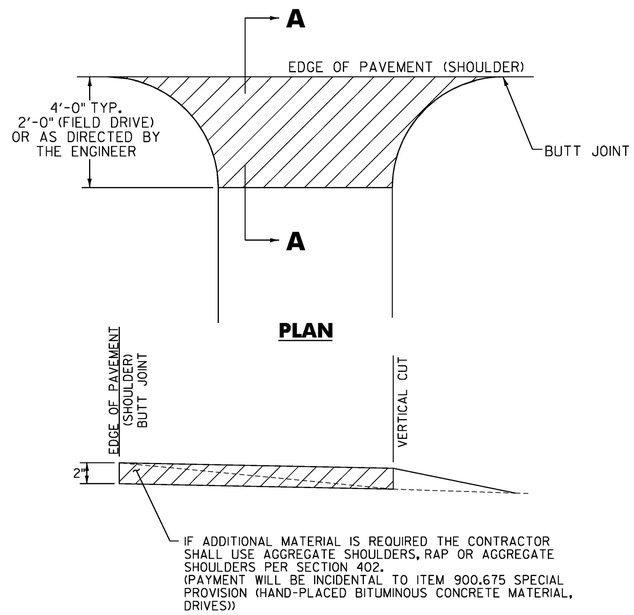

SECTION A – A

HANDWORK DETAILS FOR GRAVEL DRIVES

NOTES

1. PAVING LIFT NOT TO EXCEED 2" (50mm).

2. THE COST OF PLACING SUBBASE MATERIAL, CLEANING EXISTING PAVED SURFACES, INCLUDING POWER EQUIPMENT, AND FOR FILLING JOINTS, CRACKS AND HOLES AT LEAST 24 HOURS BEFORE PAVING, WILL NOT BE PAID DIRECTLY BUT WILL BE CONSIDERED INCIDENTAL TO ITEM 900.675, SPECIAL PROVISION (HAND-PLACED BITUMINOUS CONCRETE MATERIAL, DRIVES).

3. EXCAVATION NEEDED TO ACHIEVE PROPER DRIVE SLOPES WILL NOT BE PAID DIRECTLY BUT WILL BE CONSIDERED INCIDENTAL TO ITEM 900.675, SPECIAL PROVISION (HAND-PLACED BITUMINOUS CONCRETE MATERIAL, DRIVES).

LEGEND

ITEM 900.675 - SPECIAL PROVISION
(HAND-PLACED BITUMINOUS CONCRETE MATERIAL, DRIVES)

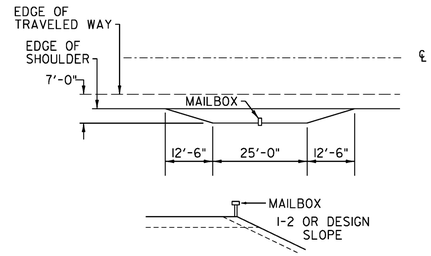

TURNOUT AT MAILBOX

TURNOUT AT MAILBOX NOT NECESSARY IF SHOULDER WIDTH IS 8'-0" OR GREATER

NOT TO SCALE

PROJECT NAME:	JAY-TROY
PROJECT NUMBER:	STP 2915(1)
FILE NAME: z10b232frm.dgn	PLOT DATE: 5/16/2014
PROJECT LEADER: P. SHEDD	DRAWN BY: W. GORDON
DESIGNED BY: N. LEMAY	CHECKED BY: P. SHEDD
HANDWORK DETAIL SHEET	SHEET 32 OF 244