

STONE FILL, TYPE I
 STA. 52+50 TO 55+36, LT
 STA. 52+75 TO 53+75, RT
 STA. 56+28 TO 56+50, LT

STEEL BEAM GUARDRAIL, GALVANIZED W/8 FEET POSTS
 STA. 56+07.5 TO 56+50, LT

ANCHOR FOR STEEL BEAM RAIL
 STA. 56+07.5, LT

DURABLE 4 INCH WHITE LINE
 (ALL LINES WILL INCLUDE EDGE LINE BREAKS
 AND RADII FOR SIDE ROADS)
 STA. 51+50 TO 56+50, SOLID LT & RT

DURABLE 4 INCH YELLOW LINE
 (ALL LINES WILL INCLUDE ϕ BREAKS FOR SIDE ROADS)
 STA. 51+50 TO 52+27, SOLID LT & RT
 STA. 52+27 TO 56+50, SOLID LT, DASHED RT


TEMPORARY 4 INCH WHITE LINE, PAINT
 (ALL LINES WILL INCLUDE EDGE LINE BREAKS
 AND RADII FOR SIDE ROADS)
 STA. 51+50 TO 56+50, SOLID LT & RT

TEMPORARY 4 INCH YELLOW LINE, PAINT
 (ALL LINES WILL INCLUDE ϕ BREAKS FOR SIDE ROADS)
 STA. 51+50 TO 52+27, SOLID LT & RT
 STA. 52+27 TO 56+50, SOLID LT, DASHED RT

GEOTEXTILE UNDER STONE FILL
 STA. 52+25 TO 55+25, LT
 STA. 52+75 TO 53+25, RT
 STA. 56+25 TO 56+50, LT

GRUBBING MATERIAL
 STA. 52+25 TO 55+25, LT
 STA. 52+75 TO 53+25, RT
 STA. 56+25 TO 56+50, LT

BARRIER FENCE
 STA. 56+00 TO 56+50, LT
 (WITH BREAKS FOR DRIVES AND SIDEROADS)
 REMOVING SIGNS
 AS SHOWN - 2

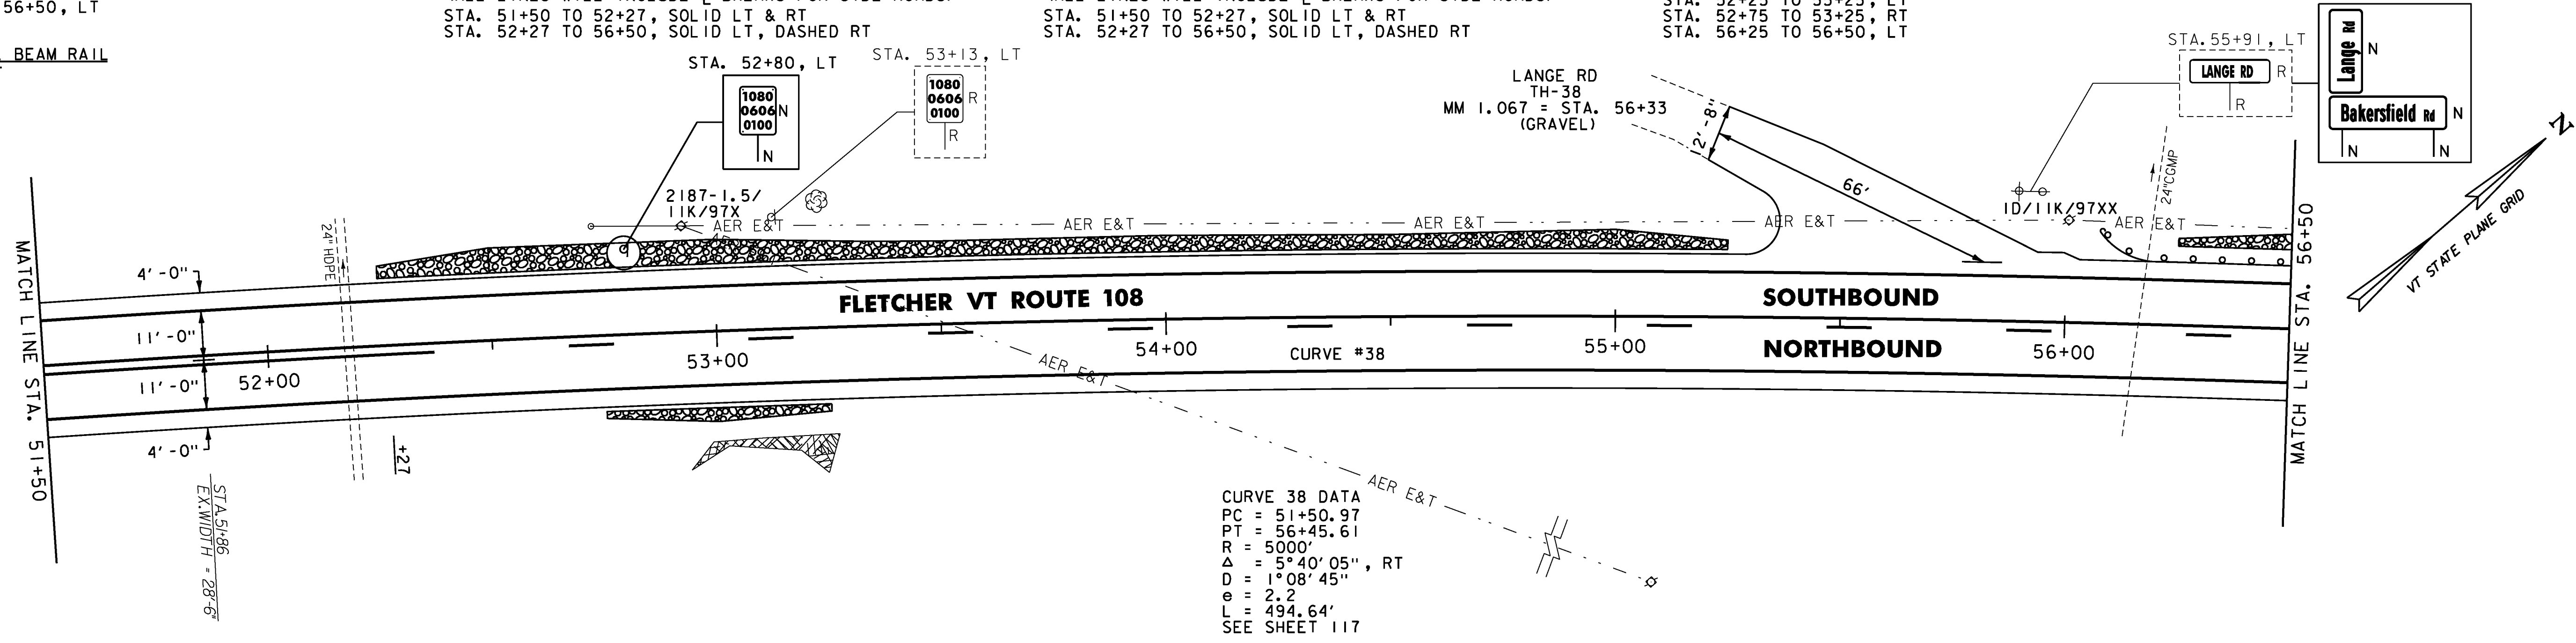

ENVIRONMENTALLY SENSITIVE LOCATIONS:

NO.	LIMITS	POSITION
19.	56+00 TO 56+50	LT

STONE FILL, TYPE I
 STA. 56+50 TO 57+25, LT

STEEL BEAM GUARDRAIL, GALVANIZED W/8 FEET POSTS
 STA. 56+50 TO 61+50, LT

REMOVAL AND DISPOSAL OF GUARDRAIL
 STA. 58+04 TO 61+50, LT

DURABLE 4 INCH WHITE LINE
 (ALL LINES WILL INCLUDE EDGE LINE BREAKS
 AND RADII FOR SIDE ROADS)
 STA. 56+50 TO 61+50, SOLID LT & RT


DURABLE 4 INCH YELLOW LINE
 (ALL LINES WILL INCLUDE ϕ BREAKS FOR SIDE ROADS)
 STA. 56+50 TO 60+19, SOLID LT, DASHED RT
 STA. 60+19 TO 61+50, DASHED LT, SOLID RT

TEMPORARY 4 INCH WHITE LINE, PAINT
 (ALL LINES WILL INCLUDE EDGE LINE BREAKS
 AND RADII FOR SIDE ROADS)
 STA. 56+50 TO 61+50, SOLID LT & RT

TEMPORARY 4 INCH YELLOW LINE, PAINT
 (ALL LINES WILL INCLUDE ϕ BREAKS FOR SIDE ROADS)
 STA. 56+50 TO 60+19, SOLID LT, DASHED RT
 STA. 60+19 TO 61+50, DASHED LT, SOLID RT

GEOTEXTILE UNDER STONE FILL
 STA. 56+50 TO 57+25, LT
 GRUBBING MATERIAL
 STA. 56+50 TO 57+25, LT

BARRIER FENCE
 STA. 56+50 TO 61+50, LT
 (WITH BREAKS FOR DRIVES AND SIDEROADS)

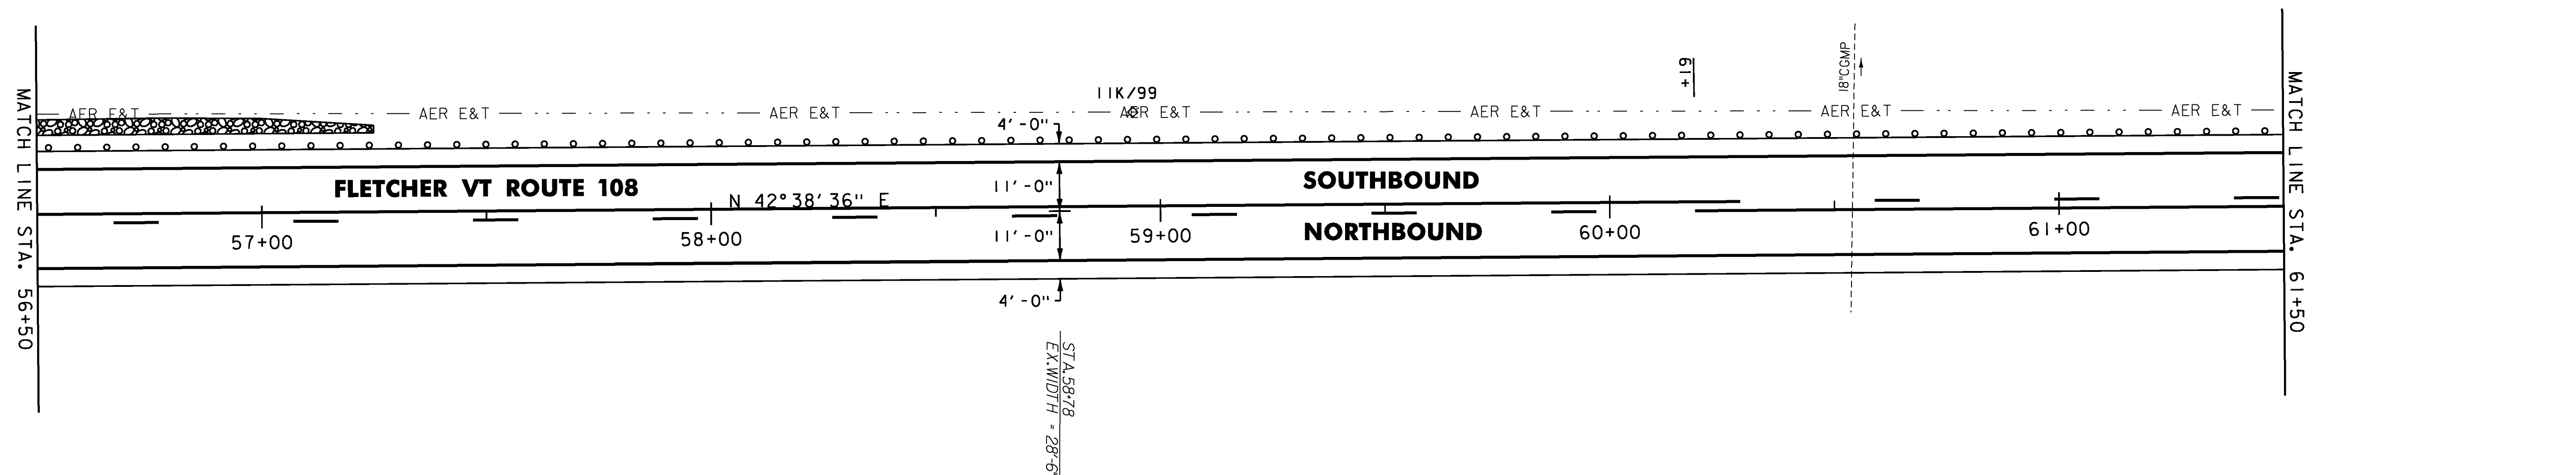

ENVIRONMENTALLY SENSITIVE LOCATIONS:

NO.	LIMITS	POSITION
19.	56+50 TO 61+50	LT

NOTES:

- FOR LEGENDS, SEE SHEET 27.
- ALL EXISTING SIGNS NOT SHOWN SHALL BE RETAINED.
- DURABLE MARKINGS DETAILED ON THIS SHEET ARE OPTION BID ITEMS. SEE SHEET 14.



NOT TO SCALE

PROJECT LAYOUT SHEET #29

PROJECT NAME: CAMBRIDGE-BAKERSFIELD
 PROJECT NUMBER: STP 2926(I)

FILE NAME: p10b258.dgn
 PROJECT LEADER: JLL
 DESIGNED BY: STANTEC
 IPARM FILE: p10b258I29.i

PLOT DATE: 11/15/2012
 DRAWN BY: STANTEC
 CHECKED BY: STANTEC
 SHEET 55 OF 387