CULVERT INVENTORY					
STATION	SIZE (IN)	TYPE	COVER (FT) LEFT	COVER (FT) RIGHT	REMARKS
0+52	15	CMP	4.25	5.00	
1+77	18	CMP	0.50	0.08	
3+42	18	CMP	2.10	3.25	
5+72	18	CPEP	3.25	3.50	
6+96	18	CPEP	2.75	2.35	
9+81	18	CPEP	2.85	2.10	
14+21	36	CPEP	2.30	2.00	
24+84	15	CMP	2.35	2.50	EXTEND LT SIDE 3 FT
28+17	18	CMP	2.50	3.25	
37+95	15	CMP	1.75	2.50	EXTEND RT SIDE 4.5 FT
45+50	50"x48"	CMP	4.25	4.50	
54+58	30	CMP	2.75	2.75	
55+69	40"x60"	CMP	4.25	3.50	
60+41	15	CPEP	2.25	2.25	
88+71	18	CPEP	4.40	4.00	
100+00	15	CMP	1.75	1.75	EXTEND RT SIDE 4 FT
103+78	36	CPEP	2.00	1.25	
105+93	18	CPEP	2.90	2.25	
107+74	36	CPEP	2.75	3.00	
107+78	36	CPEP	3.00	3.00	
111+50	18	CPEP	2.50	3.50	
114+47	18	CPEP	3.50	3.00	
117+97	24	CPEP	4.00	3.50	
124+36	18	CMP	2.75	3.50	EXTEND LT SIDE 3 FT

CULVERT INVENTORY					
STATION	SIZE (IN)	TYPE	COVER (FT) LEFT	COVER (FT) RIGHT	REMARKS
136+42	18	CPEP	2.50	2.50	
140+05	36	CPEP	4.00	4.00	
149+14	24	CPEP	2.00	2.00	
151+13	24	CPEP	2.50	2.00	
161+76	24	CPEP	6.25	5.25	
168+55	36	CMP	3.25	3.25	
175+66	18	CPEP	2.00	1.50	
183+64	24	CPEP	2.75	3.00	
188+09	60	CMP	3.75	4.50	
A 5+15	18	CMP	4.25	4.25	
A 13+05	18	CMP	5.25	4.25	
A 40+95	24	CPEP	4.00	4.00	
A 46+93	24	CMP	4.00	4.50	
A 51+39	18	CPEP	4.25	5.00	
A 55+11	36	CPEP	3.90	3.90	
A 58+52	24	CPEP	4.00	5.00	
A 74+47	36	CPEP	1.75	2.25	
A 80+82	30	CMP	5.00	5.75	
A 85+68	24	CPEP	3.50	4.50	
A 88+47	24	CPEP	2.50	2.75	
A 91+07	24	CPEP	2.75	3.50	
A 92+63	24	CPEP	5.25	6.75	
A 98+86	24	CPEP	3.50	5.25	
A 100+40	24	CPEP	4.75	6.25	
A 100+90	48	CPEP	5.75	6.50	
A 107+51	18	CPEP	6.25	5.50	

CULVERT INVENTORY					
STATION	SIZE (IN)	TYPE	COVER (FT) LEFT	COVER (FT) RIGHT	REMARKS
A 108+38	18	CPEP	5.50	4.50	
A 109+43	24	CPEP	6.25	5.00	
A 110+71	24	CPEP	8.50	8.75	
A 112+17	18	CMP	4.00	5.25	
A 112+90	18	CMP	5.25	6.00	
A 114+60	18	CPEP	8.50	9.00	
A 117+36	30	CPEP	3.75	4.25	
A 117+53	18	CMP	5.50	4.00	
A 119+39	30	CMP	3.00	3.25	
A 126+15	18	CMP	3.00	3.50	
A 129+57	18	CMP	3.00	1.00	
A 133+35	18	CPEP	1.50	3.00	

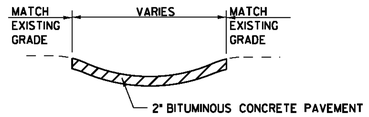

BITUMINOUS CONCRETE GUTTER DETAIL

LOCATIONS

AS INDICATED ON PLANS

NOTES:

1. EXISTING BITUMINOUS CONCRETE GUTTERS SHALL BE REMOVED WHERE INDICATED ON THE PLANS. PAYMENT WILL BE MADE UNDER ITEM 608.25 "ALL PURPOSE EXCAVATOR RENTAL, TYPE I".
2. THE BED UPON WHICH THE BITUMINOUS CONCRETE GUTTER OR TRAFFIC ISLAND WILL BE PLACED SHALL BE COMPACTED TO THE LINE, GRADE AND SLOPE AS DIRECTED BY THE RESIDENT ENGINEER.
3. THE BITUMINOUS CONCRETE PAVEMENT SHALL BE LAID IN TWO COURSES. EACH COURSE SHOULD BE ONE INCH DEEP AND ROLLED WITH A 150 POUND ROLLER.
4. THIS WORK IS TO BE PAID FOR UNDER ITEM 616.47, "BITUMINOUS CONCRETE GUTTERS AND TRAFFIC ISLANDS". PAYMENT FOR SUBBASE MATERIAL WILL BE MADE UNDER ITEM 301.28 "SUBBASE OF CRUSHED GRAVEL, FINE GRADED".

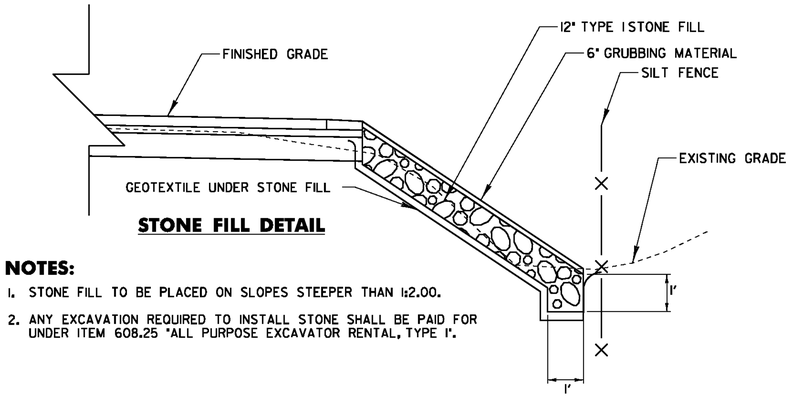

STONE FILL DETAIL

NOTES:

1. STONE FILL TO BE PLACED ON SLOPES STEEPER THAN 1:2.00.
2. ANY EXCAVATION REQUIRED TO INSTALL STONE SHALL BE PAID FOR UNDER ITEM 608.25 "ALL PURPOSE EXCAVATOR RENTAL, TYPE I".

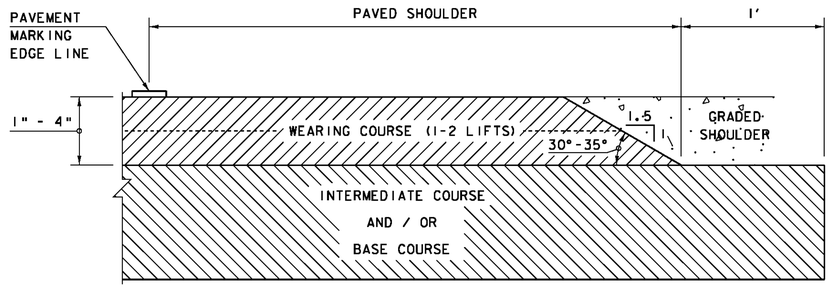

SAFETY EDGE DETAIL

NOT TO SCALE

DETAILS ARE NOT TO SCALE

PROJECT TYPICAL SHEET 4

PROJECT NAME: MONTGOMERY-WESTFIELD
PROJECT NUMBER: STP 2906(1)

FILE NAME: p10C190.dgn
PROJECT LEADER: CDL
DESIGNED BY: SJL
PLOT FILE: p10C190_10.1

PLOT DATE: 9/5/12
DRAWN BY: SJL
CHECKED BY: CDL
SHEET 10 OF 178