STATION	POSITION	TYPE	QUANTITY (SY)
MONTGOMERY			
1+03	RT	PAVED	14.1
2+33	LT	PAVED	41.1
2+65	RT	PAVED	20.4
2+98	LT	PAVED	35.4
3+42	RT	GRAVEL	7.7
4+58	LT	PAVED	9.7
4+80	RT	PAVED	22.2
5+39	RT	GRAVEL	6.5
6+30	RT	PAVED	13.4
6+46	LT	PAVED	10.9
6+68	LT	GRAVEL	6.0
8+55	LT	GRAVEL	10.3
9+48	LT	GRAVEL	11.0
9+59	RT	PAVED	72.5
10+73	LT	GRAVEL	16.7
11+04	LT	GRAVEL	8.1
11+65	LT	GRAVEL	8.2
12+11	RT	PAVED	19.2
13+56	LT	GRAVEL	6.0
14+03	RT	GRAVEL	6.9
17+90	RT	PAVED	9.6
21+59	RT	GRAVEL	48.3
23+03	LT	GRAVEL	11.9
23+48	RT	PAVED	23.6
28+04	LT	GRAVEL	9.2
30+22	LT	FIELD	8.4
33+23	RT	GRAVEL	24.0
33+67	RT	FIELD	3.3
37+65	LT	WOODS	4.3
40+49	LT	FIELD	3.5
40+78	RT	FIELD	15.5
42+58	LT	GRAVEL	7.3
46+62	RT	GRAVEL	7.7

STATION	POSITION	TYPE	QUANTITY (SY)
47+45	LT	WOODS	6.9
49+09	RT	GRAVEL	7.9
53+76	RT	PAVED	52.7
57+25	RT	GRAVEL	17.3
58+98	RT	GRAVEL	11.6
59+53	LT	GRAVEL	8.4
61+69	RT	GRAVEL	12.8
65+29	RT	GRAVEL	8.4
66+50	LT	GRAVEL	10.3
67+09	RT	GRAVEL	21.4
69+13	LT	FIELD	7.4
71+50	LT	PAVED	33.7
72+44	RT	GRAVEL	11.3
74+96	LT	GRAVEL	12.6
75+97	LT	GRAVEL	13.9
82+12	LT	GRAVEL	16.1
82+96	LT	WOODS	6.9
93+08	RT	GRAVEL	12.3
97+79	LT	GRAVEL	13.6
98+20	RT	GRAVEL	11.4
100+56	RT	GRAVEL	10.7
101+99	RT	FIELD	7.0
109+86	RT	GRAVEL	13.1
112+86	RT	GRAVEL	12.3
113+35	LT	GRAVEL	10.4
114+27	LT	GRAVEL	12.0
117+68	LT	GRAVEL	17.2
124+23	LT	GRAVEL	9.8
124+93	LT	GRAVEL	10.0
132+62	LT	FIELD	5.2
134+28	LT	GRAVEL	30.6
136+11	RT	GRAVEL	12.9
138+97	LT	PAVED	47.2

STATION	POSITION	TYPE	QUANTITY (SY)
141+55	RT	WOODS	2.5
147+23	RT	GRAVEL	9.5
148+95	RT	GRAVEL	11.9
151+69	LT	GRAVEL	11.8
156+05	RT	GRAVEL	19.4
160+61	LT	GRAVEL	16.7
161+19	RT	GRAVEL	31.0
161+35	LT	GRAVEL	17.1
162+71	LT	GRAVEL	13.4
167+66	RT	GRAVEL	8.2
169+37	LT	GRAVEL	14.0
172+77	LT	GRAVEL	10.8
172+99	RT	GRAVEL	13.6
176+91	LT	GRAVEL	20.5
177+57	LT	GRAVEL	14.8
177+62	RT	GRAVEL	17.5
183+41	LT	GRAVEL	22.1
187+47	RT	GRAVEL	8.7
188+87	RT	FIELD	4.0
195+86	LT	GRAVEL	12.0
196+73	LT	GRAVEL	8.4
198+41	RT	GRAVEL	16.2
WESTFIELD			
A 3+24	LT	GRAVEL	21.1
A 4+05	RT	GRAVEL	11.4
A 9+49	LT	PAVED	215.7
A 9+56	RT	PAVED	12.2
A 12+98	RT	GRAVEL	15.2
A 14+78	LT	FIELD	4.4
A 17+80	LT	GRAVEL	52.6
A 30+05	RT	PAVED	47.8
A 30+58	LT	PAVED	15.0
A 31+71	RT	GRAVEL	14.2
A 39+77	LT	PAVED	22.9

STATION	POSITION	TYPE	QUANTITY (SY)
A 40+79	LT	GRAVEL	15.5
A 41+67	RT	GRAVEL	14.5
A 46+48	LT	GRAVEL	15.4
A 53+05	LT	GRAVEL	9.1
A 56+00	RT	PAVED	27.6
A 61+13	RT	GRAVEL	35.5
A 61+50	LT	GRAVEL	17.2
A 72+52	RT	GRAVEL	39.5
A 91+01	LT	GRAVEL	14.4
A 99+91	LT	GRAVEL	36.1
A 103+23	RT	GRAVEL	16.2
A 111+94	LT	WOODS	8.3
A 126+05	LT	WOODS	3.9
A 133+22	LT	WOODS	5.2
		SUBTOTAL	2013.2
		ROUNDING	86.8
		TOTAL	2100.0

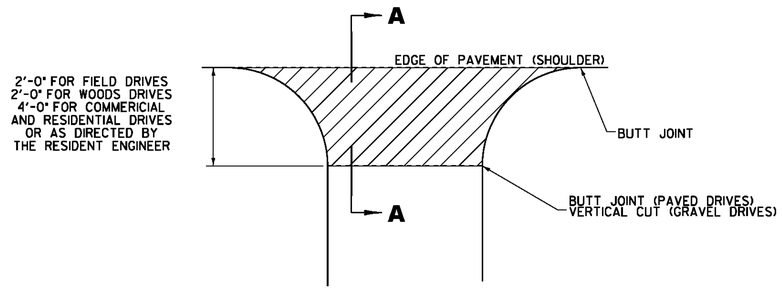

PLAN

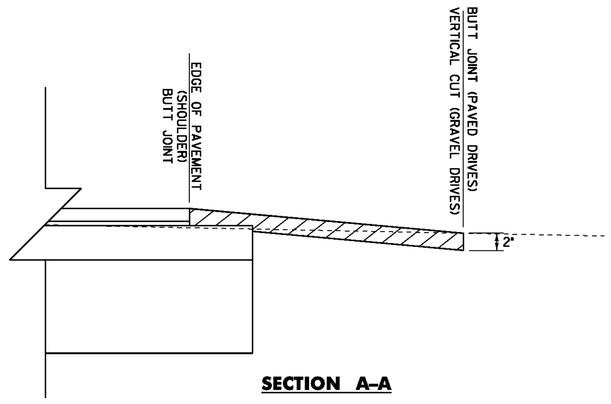

SECTION A-A

HANDWORK DETAILS FOR DRIVES

VT ROUTE 242

NOTES:

1. PAVING LIFT NOT TO EXCEED TWO INCHES (50mm).

2. THE COST OF PLACING SUBBASE MATERIAL, CLEANING EXISTING PAVED SURFACES, INCLUDING POWER EQUIPMENT, AND FOR FILLING JOINTS, CRACKS AND HOLES WILL NOT BE PAID DIRECTLY BUT WILL BE INCIDENTAL TO ITEM 900.675 "SPECIAL PROVISION (HAND-PLACED BITUMINOUS CONCRETE MATERIAL, DRIVES)".

3. EXCAVATION OR FILL NEEDED TO ACHIEVE PROPER DRIVE SLOPES WILL NOT BE PAID DIRECTLY BUT WILL BE INCIDENTAL TO ITEM 900.675 "SPECIAL PROVISION (HAND-PLACED BITUMINOUS CONCRETE MATERIAL, DRIVES)".

LEGEND

BITUMINOUS PAVEMENT, 900.675 "SPECIAL PROVISION (HAND-PLACED BITUMINOUS CONCRETE MATERIAL, DRIVES)"

DETAILS ARE NOT TO SCALE

HANDWORK DETAILS FOR DRIVES

PROJECT NAME: MONTGOMERY-WESTFIELD
PROJECT NUMBER: STP 2906(11)

FILE NAME: p10C190.dgn
PROJECT LEADER: CDL
DESIGNED BY: SJL
PLOT FILE: p10C190_19.1

PLOT DATE: 9/5/12
DRAWN BY: JMB
CHECKED BY: CDL
SHEET 19 OF 178