

TEMPORARY 4 INCH WHITE LINE, PAINT
 DURABLE 4 INCH WHITE LINE (OPTION BID ITEM)
 274+50 TO 285+50 SOLID RT
 274+50 TO 280+69 SOLID LT
 280+69 TO 280+99 SOLID LT (TH 3)
 281+21 TO 281+50 SOLID LT (TH 3)
 281+50 TO 285+50 SOLID LT

TEMPORARY 4 INCH YELLOW LINE, PAINT
 DURABLE 4 INCH YELLOW LINE (OPTION BID ITEM)
 274+50 TO 280+91 SOLID LT & RT
 281+10 TO 281+11 DOUBLE SOLID LT (TH 3)
 281+31 TO 285+50 SOLID LT & RT


TEMPORARY 24" STOP BAR, PAINT
 DURABLE 24" STOP BAR (OPTION BID ITEM)
 280+89 TO 281+10 LT (TH 3)

TEMPORARY LETTER OR SYMBOL, PAINT
 DURABLE LETTER OR SYMBOL (OPTION BID ITEM)
 281+03 LT - "STOP" (TH 3)

STEEL BEAM GUARDRAIL,
 GALVANIZED W/8 FEET POSTS
 274+50 TO 279+88.8 RT
 ANCHOR FOR STEEL BEAM RAIL
 279+88.8 RT

REMOVAL AND DISPOSAL OF GUARDRAIL
 274+50 TO 279+88 RT
 282+68 TO 285+50 LT
 283+18 TO 285+35 RT
 DELINEATOR WITH STEEL POST
 279+88.8 RT

THINNING AND TRIMMING FOR SIGNS
 277+50 RT
 RELOCATE MAILBOX, SINGLE SUPPORT
 277+62 LT
 277+63 LT
 REMOVING SIGNS
 AS SHOWN - 8

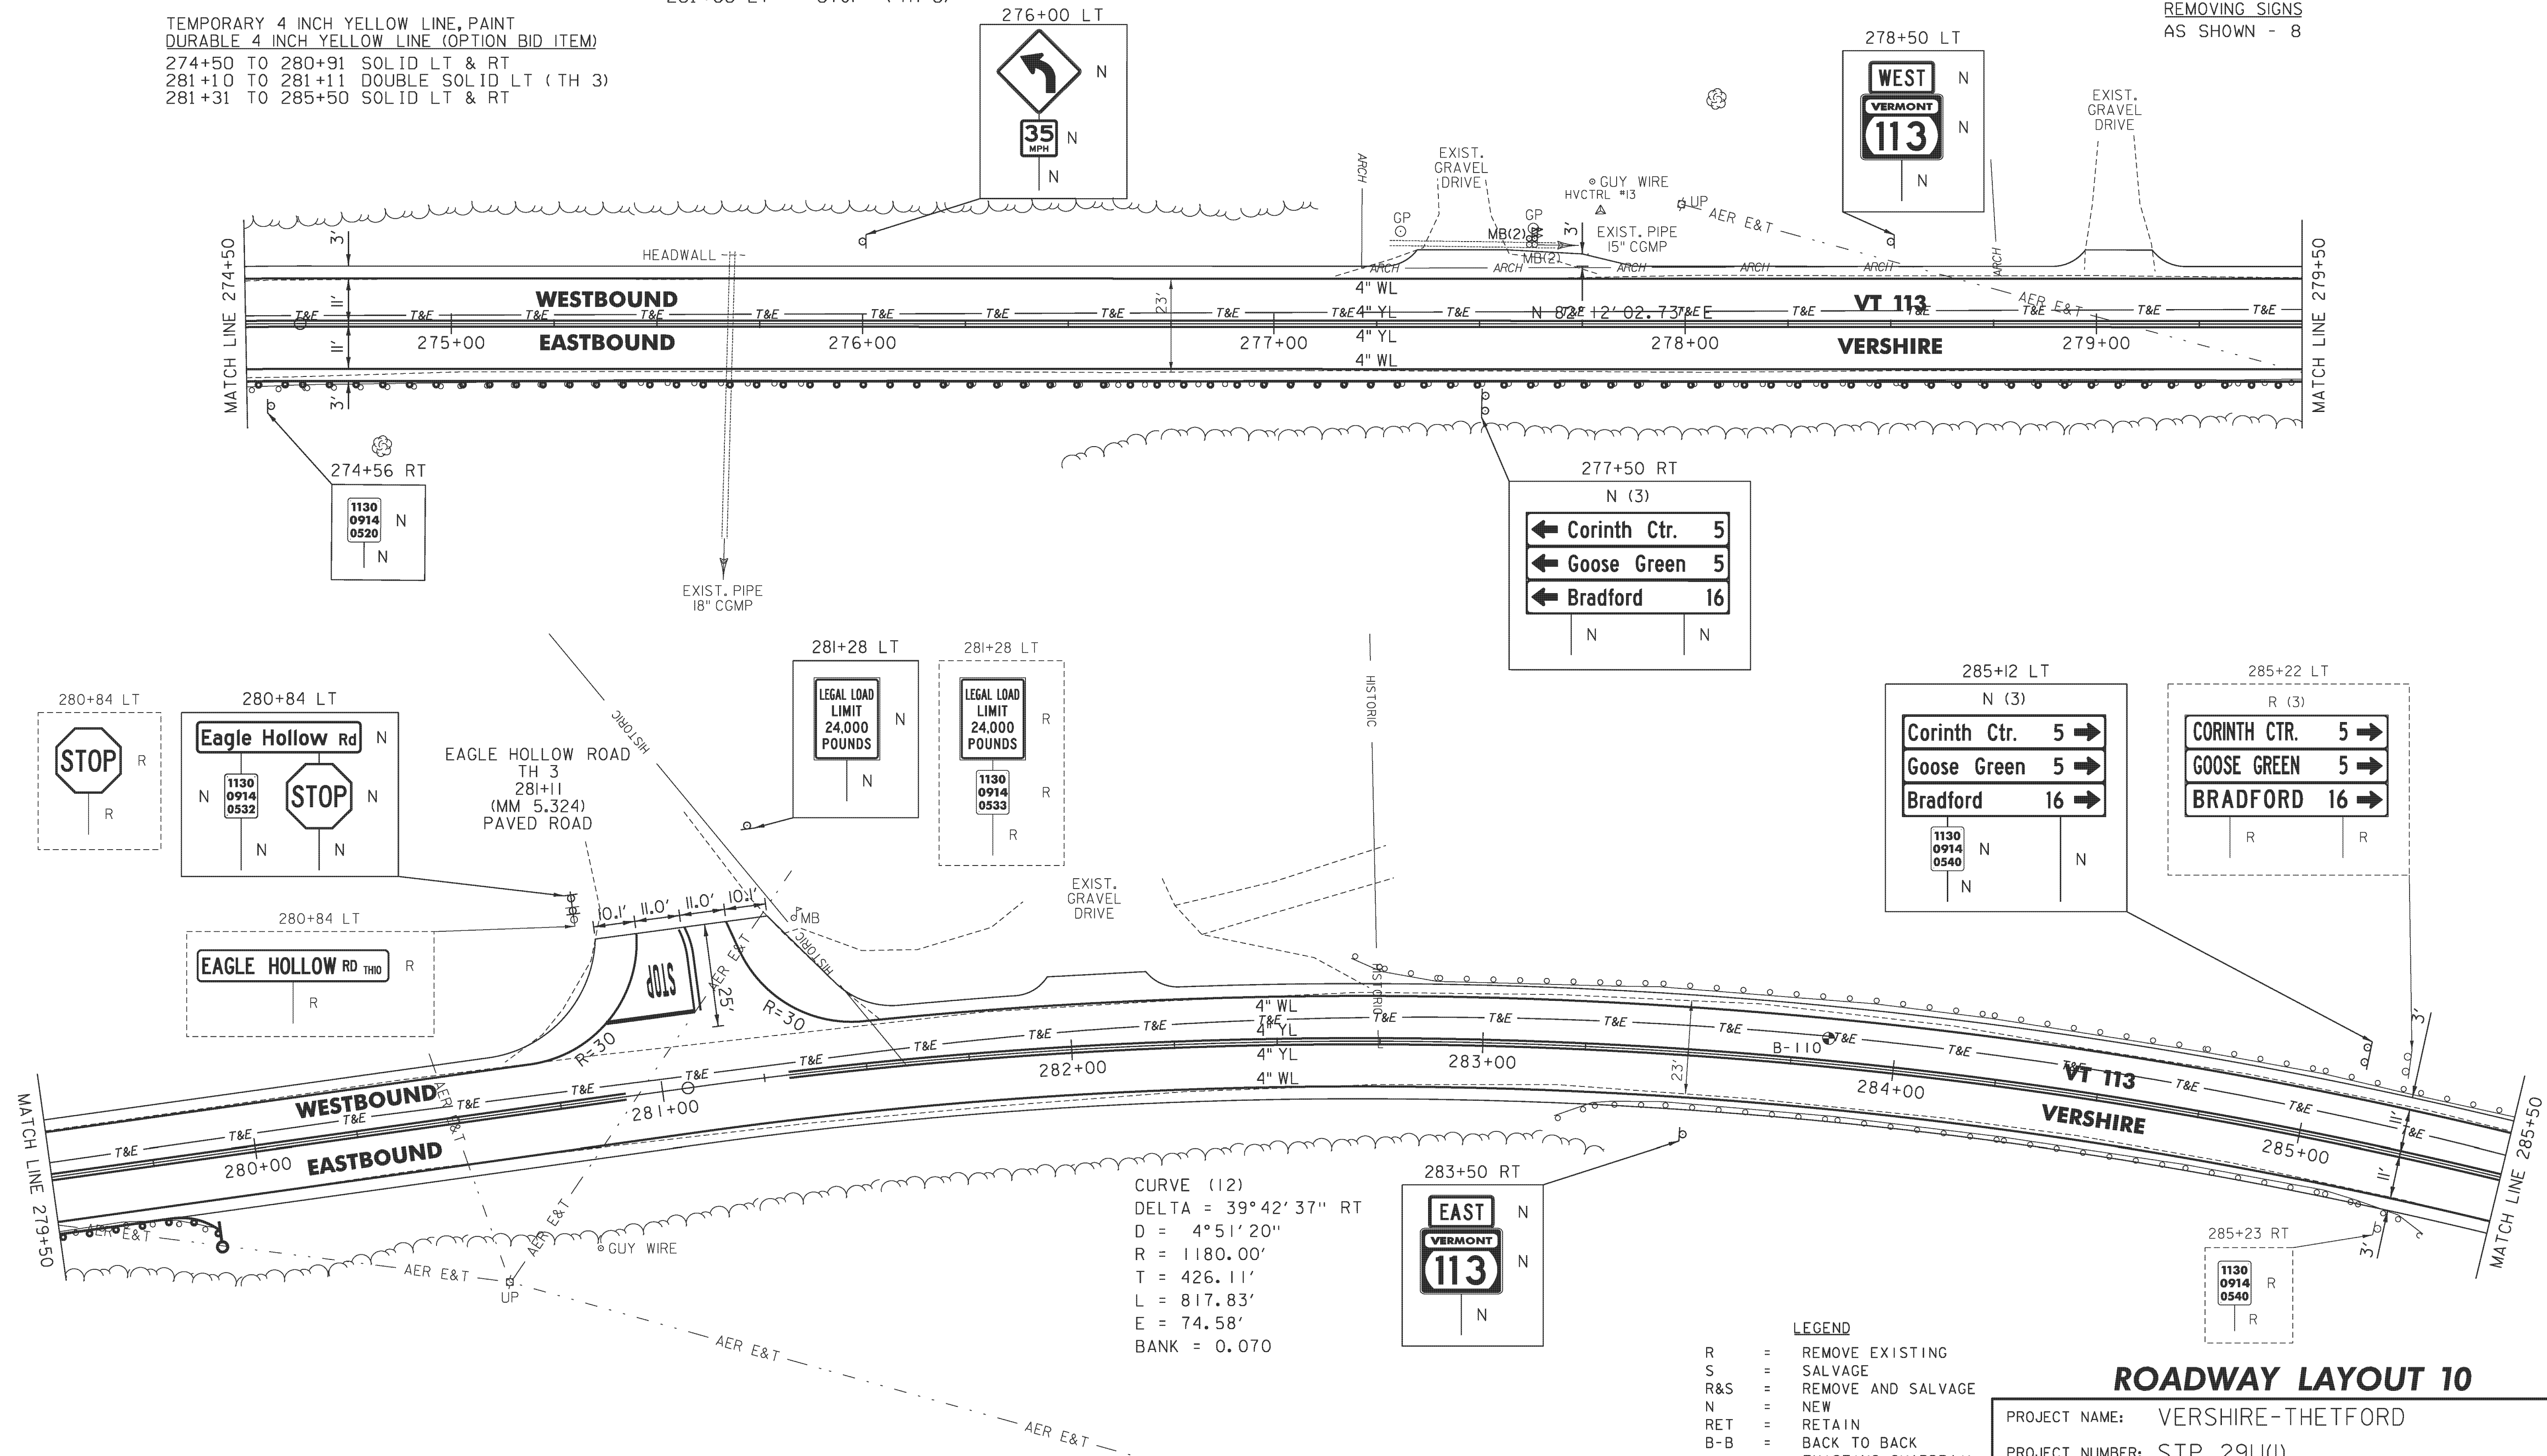

- LEGEND**
- R = REMOVE EXISTING
 - S = SALVAGE
 - R&S = REMOVE AND SALVAGE
 - N = NEW
 - RET = RETAIN
 - B-B = BACK TO BACK
 - = EXISTING GUARDRAIL
 - = PROPOSED GUARDRAIL
 - YL = YELLOW LINE
 - WL = WHITE LINE
 - = DELINEATOR
 - = PROPOSED UP

ROADWAY LAYOUT 10

PROJECT NAME: VERSHIRE-THETFORD
 PROJECT NUMBER: STP 2911(I)
 FILE NAME: pl0c224.dgn
 PROJECT LEADER: PTS
 DESIGNED BY: NLL
 IPARM FILE NAME: IOC224_37
 PLOT DATE: 3/8/2013
 DRAWN BY: SNG
 CHECKED BY: PTS
 SHEET 37 OF 232