

TEMPORARY 4 INCH WHITE LINE, PAINT  
 DURABLE 4 INCH WHITE LINE (OPTION BID ITEM)  
 368+50 TO 380+50 SOLID LT  
 368+50 TO 380+50 SOLID RT

TEMPORARY 4 INCH YELLOW LINE, PAINT  
 DURABLE 4 INCH YELLOW LINE (OPTION BID ITEM)  
 368+50 TO 380+50 SOLID LT & RT

STEEL BEAM GUARDRAIL, GALVANIZED  
 374+61.5 TO 376+24 LT  
 377+24 TO 377+61.5 LT

STEEL BEAM GUARDRAIL,  
 GALVANIZED W/8 FEET POSTS  
 376+32 TO 376+57 RT  
 377+57 TO 378+19.5 RT

H.D. STEEL BEAM GUARDRAIL,  
 GALVANIZED W/8 FEET POSTS  
 376+57 TO 376+82 RT  
 377+32 TO 377+57 RT

H.D. STEEL BEAM  
 GUARDRAIL, GALVANIZED  
 376+24 TO 376+49 LT  
 376+99 TO 377+24 LT



ANCHOR FOR STEEL BEAM RAIL  
 374+61.5 LT  
 376+32 RT  
 377+61.5 LT  
 378+19.5 RT

REMOVAL AND DISPOSAL OF GUARDRAIL  
 374+60 TO 376+49 LT  
 376+44 TO 376+82 RT  
 376+99 TO 377+62 LT  
 377+32 TO 378+24 RT  
 378+24 TO 380+10 LT

DELINEATOR WITH STEEL POST  
 374+61.5 LT  
 376+32 RT  
 377+61.5 LT  
 378+19.5 RT

REMOVING SIGNS  
 AS SHOWN - 1

CURVE (19)  
 DELTA = 16°35'24" LT  
 D = 5°30'33"  
 R = 1040.00'  
 T = 151.63'  
 L = 301.13'  
 E = 11.00'  
 BANK = 0.074

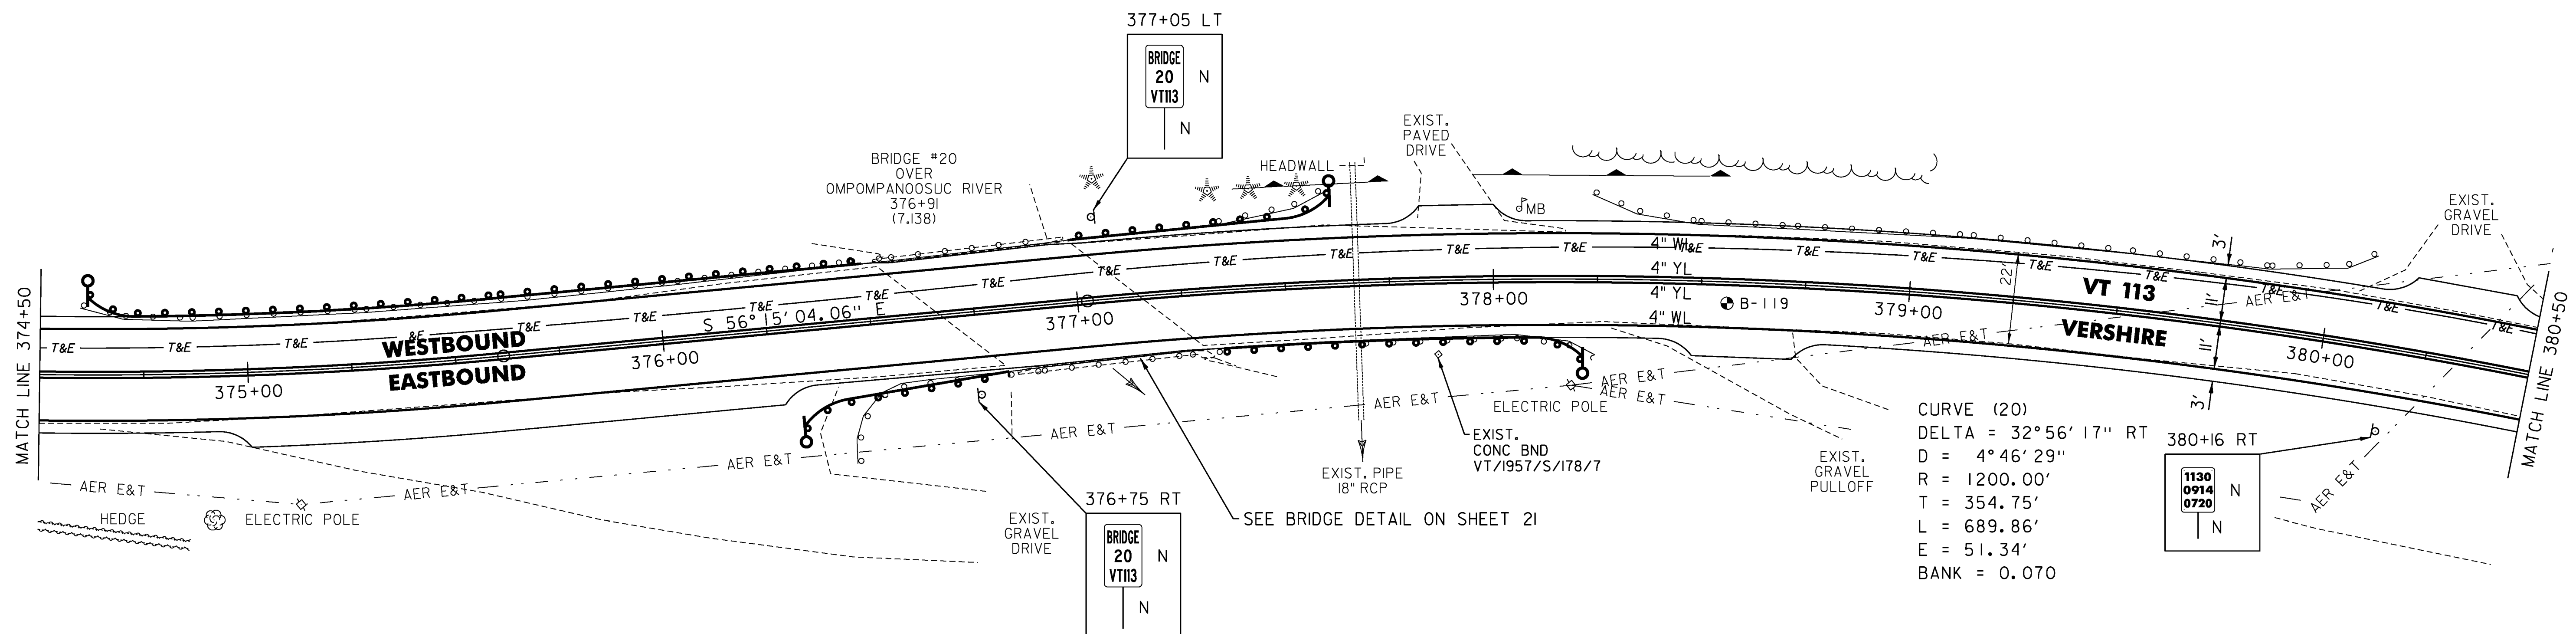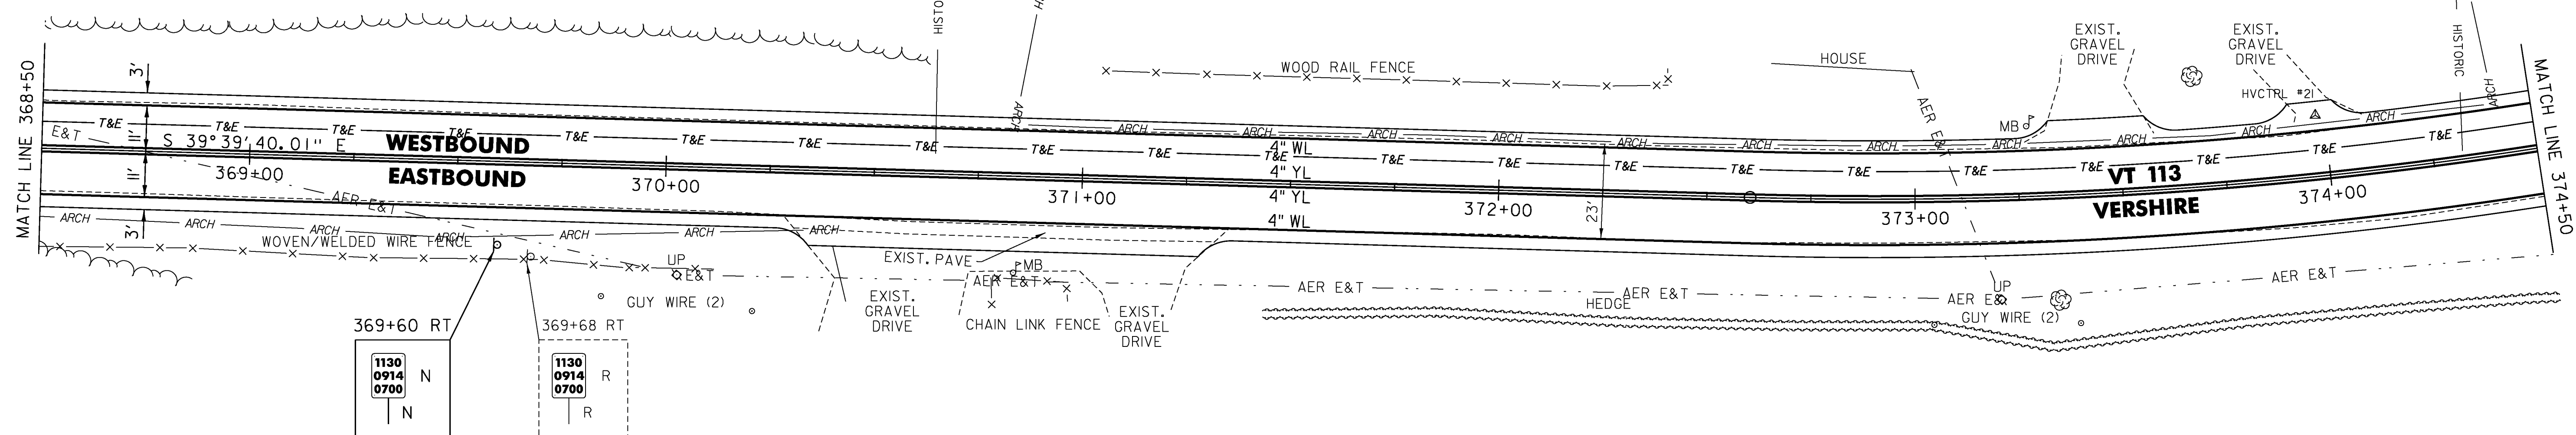

CURVE (20)  
 DELTA = 32°56'17" RT  
 D = 4°46'29"  
 R = 1200.00'  
 T = 354.75'  
 L = 689.86'  
 E = 51.34'  
 BANK = 0.070

**LEGEND**

- R = REMOVE EXISTING
- S = SALVAGE
- R&S = REMOVE AND SALVAGE
- N = NEW
- RET = RETAIN
- B-B = BACK TO BACK
- = EXISTING GUARDRAIL
- = PROPOSED GUARDRAIL
- YL = YELLOW LINE
- WL = WHITE LINE
- = DELINEATOR
- = PROPOSED UP

**ROADWAY LAYOUT 18**

PROJECT NAME: VERSHIRE-THETFORD

PROJECT NUMBER: STP 2911(I)

FILE NAME: pl0c224.dgn

PROJECT LEADER: PTS

DESIGNED BY: NLL

IPARM FILE NAME: IOC224\_45

PLOT DATE: 3/8/2013

DRAWN BY: SNG

CHECKED BY: PTS

SHEET 45 OF 232