


**CONSTRUCTION APPROACH SIGNING**

NOT TO SCALE  
SEE STD E-100 AND E-100A FOR SIGN PLACEMENT

PCMS

**RANDOLPH**

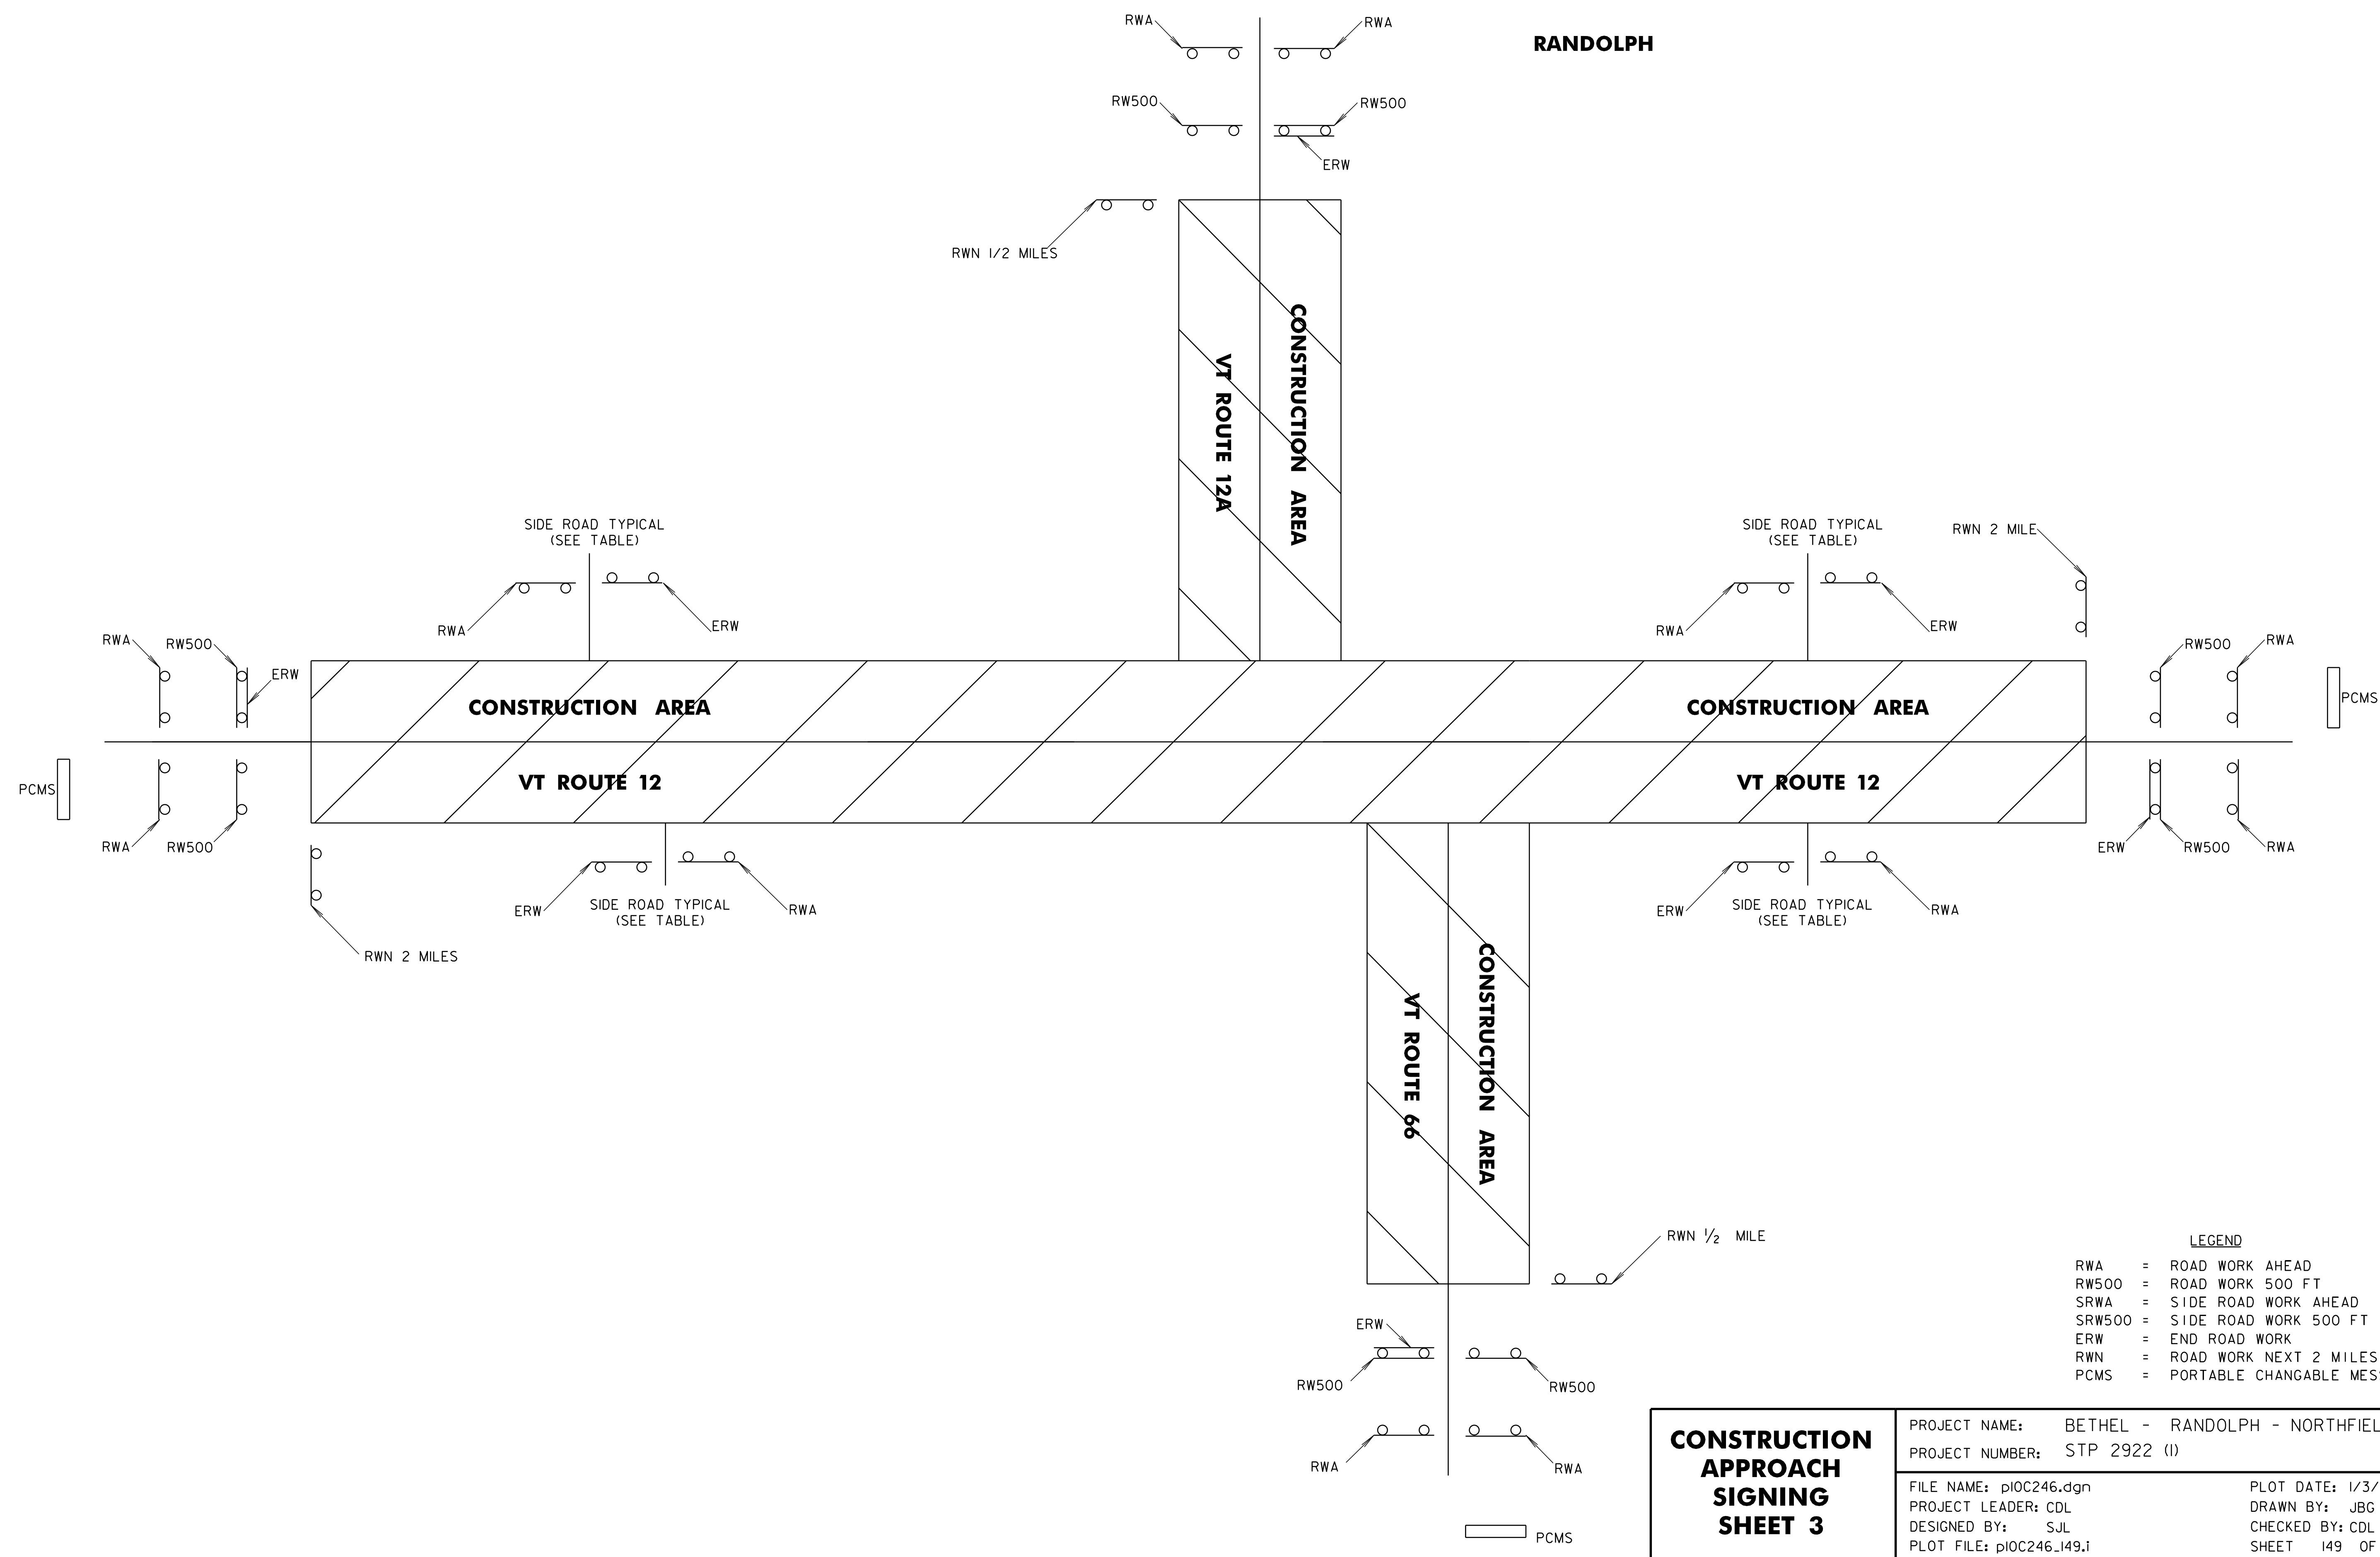

- LEGEND**
- RWA = ROAD WORK AHEAD
  - RW500 = ROAD WORK 500 FT
  - SRWA = SIDE ROAD WORK AHEAD
  - SRW500 = SIDE ROAD WORK 500 FT
  - ERW = END ROAD WORK
  - RWN = ROAD WORK NEXT 2 MILES
  - PCMS = PORTABLE CHANGABLE MESSAGE SIGN

**CONSTRUCTION  
APPROACH  
SIGNING  
SHEET 3**

PROJECT NAME: BETHEL - RANDOLPH - NORTHFIELD  
 PROJECT NUMBER: STP 2922 (I)  
 FILE NAME: p10C246.dgn  
 PROJECT LEADER: CDL  
 DESIGNED BY: SJL  
 PLOT FILE: p10C246\_149.1  
 PLOT DATE: 1/3/13  
 DRAWN BY: JBG  
 CHECKED BY: CDL  
 SHEET 149 OF 149